

THE CLEANEST GENERAL CATALOGUE EVER.

**HIGH PRESSURE WASHERS
STEAM GENERATORS
PURE WATER CLEANING SYSTEMS
ELECTRIC VEHICLES**

2026

PORTOTECNICA™

member of



IPC

IPC GROUP SUMMARY

#3 EUROPEAN MANUFACTURER OF PROFESSIONAL CLEANING EQUIPMENT

IPC knows every detail in the cleaning industry: with five renowned and indicative factories, it is the undisputed Italian dealer.

INNOVATIONS

INNOVATION THAT DELIVERS PRODUCTIVITY

IPC's large R&D team works as a group of experts in cleaning innovation to deliver tangible productivity benefits at a fast pace.

KEY VALUES

CLIENT-CENTRIC

IPC's tremendous depth of expertise and know-how are focused on delivering to customers specific solutions, addressing effectively emerging cleaning needs together.

KEY VALUES

COMMITTED TO SUSTAINABILITY

IPC's sustainable technologies contribute every year to always higher standards of both energy and water savings, and recycling of materials.

NETWORK

GLOBAL DISTRIBUTION


IPC has a global commercial network covering over 120 countries, with wide and complete service in reference markets.

PRODUCTS

COMPLETE PORTFOLIO

IPC provides a complete range of professional equipment including scrubber driers, professional vacuum cleaners, high pressure washers and manual equipment.

MORE THAN **1.000 SPECIALISTS** DEDICATED TO **"CLEAN ON"**



PORTOTECNICA

50.000 pieces of hp cleaners a year and a **4.500 sq/m** of warehouses.

Number of patents: 12

Certificates:

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI ISO 45001:2018
UNI EN ISO 14067:2018




GANSOW

40.000 pieces of floorcare machines a year and a **7.000 sq/m** of warehouses.

Number of patents: 45

Certificates:

UNI EN ISO 9001:2015
UNI ISO 45001:2018
UNI EN ISO 14067:2018



SOTECO

200.000 pieces of vacuums a year and a **1.800 sq/m** of warehouses.

Number of patents: 9

Certificates:

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI ISO 45001:2018
UNI EN ISO 14067:2018



EUROMOP READYSYSTEM PULEX

7 million pieces of cleaning equipments a year and **11.000 sq/m** of warehouses.

Number of patents: 23

Certificates:

UNI EN ISO 9001:2015
UNI EN ISO 14067:2018

HIGH PRESSURE WASHERS - COLD WATER



G132/G133

P. 30



SUPERJET

P. 32



G.POWER-C

P. 34



G.POWER-C PLUS

P. 36



N.ELITE-C

P. 38



ATOMAX-C VALUE

P. 40



ATOMAX-C PREMIUM

P. 42



ATOMAX-C

P. 44



ROYAL-C

P. 46



PRESS-C VALUE

P. 48



PRESS-C PREMIUM

P. 50



PRESS-C

P. 52

HIGH PRESSURE WASHERS - **COLD WATER**



PW-C85

P. 54



ABSOLUTE-C

P. 56



BENZ-C

P. 58



DIESEL-C

P. 60



FIRE BOX

P. 62

HIGH PRESSURE WASHERS - HOT WATER



HOT LINE-H

P. 68



MITHO-P EASY

P. 70

MITHO-P VALUE

P. 70



MITHO-P PLUS

P. 72



ARGON-H

P. 74

ARGON-H4

P. 74



**STAINLESS
STEEL
SERIES**

PW-H28/4

P. 76



KOSMIC-H

P. 78

KOSMIC -H

P. 78



GOLDEN - H VALUE

P. 80

GOLDEN - H VALUE

P. 80



GOLDEN - H PREMIUM

P. 82

GOLDEN - H PREMIUM

P. 82



HPS-H

P. 84



MISTRAL - H VALUE

P. 86

MISTRAL - H VALUE

P. 86



MISTRAL - H PREMIUM

P. 88



**STAINLESS
STEEL
SERIES**

PW-H100 P

P. 90

HIGH PRESSURE WASHERS - **HOT WATER**



MISTRAL - HT P. 92

MISTRAL - HT4 P. 92



MISTRAL-H AUTOMATIC P. 94

MISTRAL-H AUTOMATIC P. 94



SKID FUEGO-H P. 96

HIGH PRESSURE WASHERS - **STATIONARY**



MLC-C P. 102



ML CMP P. 104



ML-C P. 106



SML-C P. 108



IWD-H P. 110

ELECTRICALLY HEATED BOILER



MISTRAL-E

P. 116



MISTRAL-E

P. 118



**STAINLESS
STEEL
SERIES**

PW-E100

P. 120



**STAINLESS
STEEL
SERIES**

IWD-E

P. 122

HOT WATER WEED REMOVAL SYSTEM



GREEN JET 1010 M

P. 126



GREEN JET 7510

P. 128

STEAM GENERATORS



SG-08/SG-10

P. 136



NEW STEAMY M

P. 138

NEW STEAMY PLUS

P. 138



SG-48

P. 140

STEAM GENERATORS



SG-50 (WITH TROLLEY)

P. 142



SG-55

P. 144

PURE WATER CLEANING SYSTEMS - **GREEN TUBE - HIGH PURE**



HPB HIGH PURE

P. 154



HPE HIGH PURE

P. 155



HPG HIGH PURE

P. 156

ELECTRIC VEHICLES



TIGER 250/TIGER 250 BC

P. 174



TIGER 500

P. 174



HIGH PRESSURE WASHERS


INNOVATIONS	10
SUGGESTED SECTORS	23
COLD WATER	27
HOT WATER	65
STATIONARY	99
ELECTRICALLY HEATED BOILER	113
HOT WATER WEED REMOVAL SYSTEM	124



AMSC™ ADVANCED MULTIFUNCTION SAFETY CONTROLS

FULL CONTROL OVER YOUR MACHINE.

The innovation Advanced Multifunction Safety Control is a high-tech system that provides the maximum machine safeguarding and the improvement of the operator safety at work.

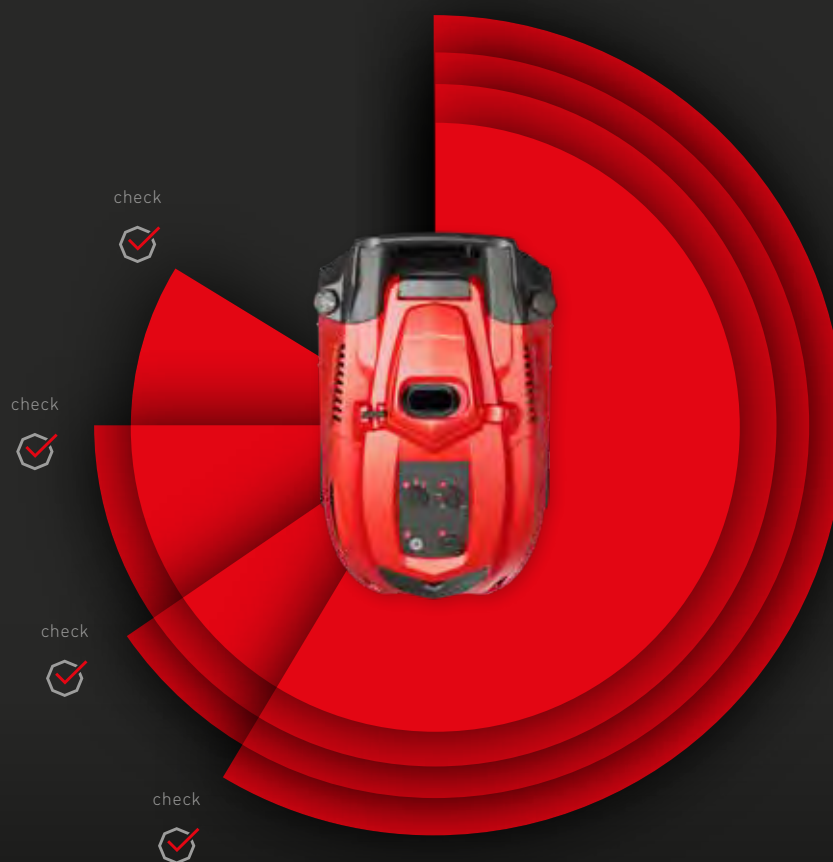

- **IPSF** Intelligent Proportional Switching Off
- **DTS** Exclusive Delayed Total Stop
- **MLC** Micro Leakage Control
- **NCC** Nozzle Clogged Control
- **WHC** Working Hours Counter
- **FPS** Flooding Prevention System
- **IASF** Intelligent Automatic Switch Off
- **DRP** Dry Running Protection
- **IBD** Ignition Boiler Delay
- **FCS** Infrared Flame Control System
- **MCL** Maintenance Check Led
- **FLC** Fuel Level Control
- **HBLS** High Brightness Led Signals
- **DTSC** Digital temperature stabilizer control
- **LCPU** Limescale Corrosion Protection Unit

MSC™ MULTIFUNCTION SAFETY CONTROLS

The innovation MSC™ includes the functions: **IPSF, DTS, MLC, NCC, WHC, FPS, IASF, DRP, IBD, FCS, MCL, FLC, HBLS**
The machines provided with these technology are: **N. ELITE-C, ATOMAC-C PREMIUM, ROYAL-C, PRESS-C PREMIUM, PW-C85, ABSOLUTE-C, ARGON-H, ARGON-H4, PW-E100, IWD-E, GREEN JET 1010 M, GREEN JET 7510 M**

BENEFITS

- 01** Optimized cleaning operations in total safety.
- 02** Reduced energy consumption.
- 03** Reduced maintenance costs and prevented failures through the innovative self-diagnosis system.
- 04** No floods from leaks in the hydraulic circuit.



DIAD DIRECT INJECTION DETERGENT AND ANTI-SCALE

EXCELLENT RESULTS WHILE SAVING MONEY.

The direct injection anti-scale and detergent controls guarantee the desired and precise products mixing, by reducing detergent expense, mechanical vibrations and noise related to traditional system.

+Productivity



BENEFITS


- 01 Reduction of detergent expense, mechanical vibrations and noise due to traditional systems.
- 02 Operator productivity increase.
- 03 Pump life extension.



ETSC™ ELECTRONIC TEMPERATURE CONTROL

CONSTANT TEMPERATURE FOR INCREASED SAVINGS.

An extremely accurate electronic control system that ensures constant water temperature.

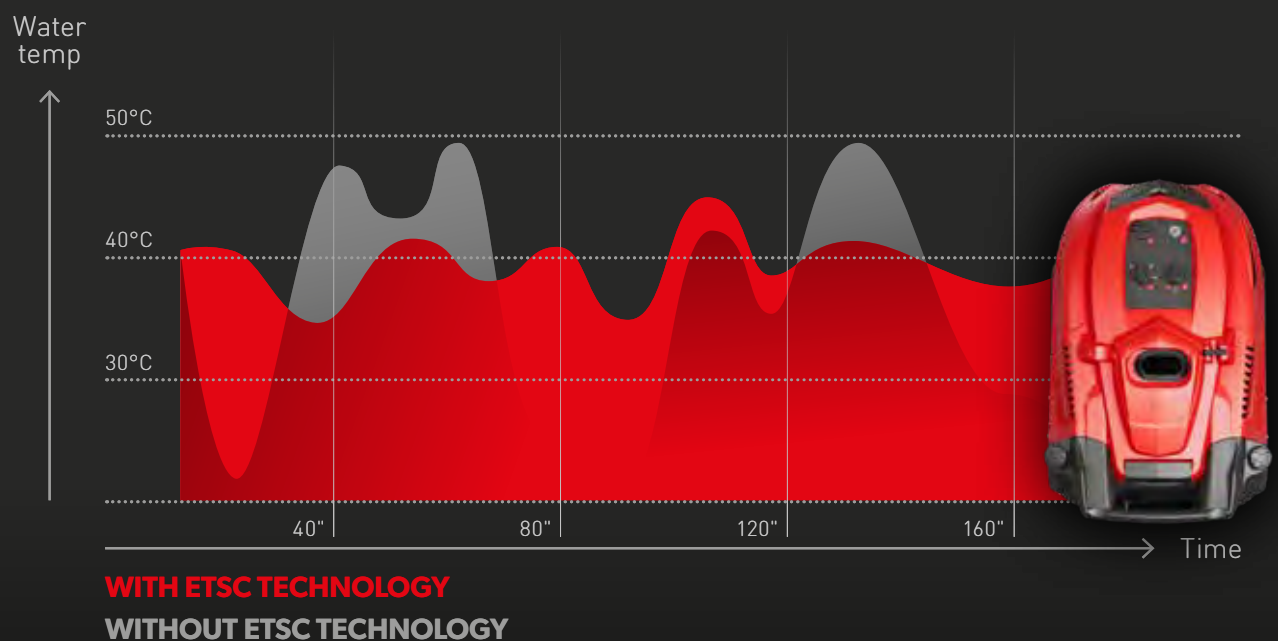

BENEFITS


- 01 Lower fuel consumption in ECO MODE.
- 02 Lower maintenance costs.
- 03 Stepless temperature control ensures the outlet water temperature.



ECO
SYSTEM

REDUCED DIESEL CONSUMPTION, MAXIMIZED THE CLEANING.

This function leads to diesel consumption and emissions reduction up to 25% by setting the water temperature at 60° C automatically.

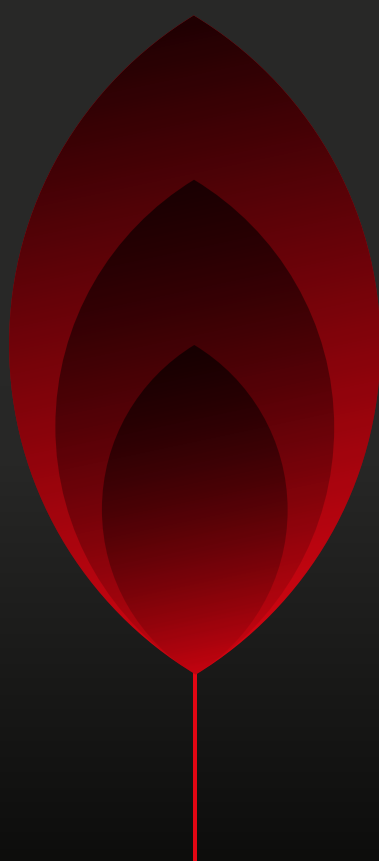

>25%

REDUCING DIESEL
CONSUMPTION
AND EMISSIONS

BENEFITS

- 01 Reduction of diesel consumption and emissions up to 25%.
- 02 Run time increase.
- 03 Maximization of detergents cleaning effect.



CIRCULAR DESIGN & OPERATION

ADDRESSING THE SUSTAINABILITY CHALLENGE.

The great commitment to the Environment is accomplished by recycled plastic, recyclable components and the reduction of diesel, energy and detergent consumptions.



BENEFITS

- 01 Direct injection against excessive detergent application.
- 02 Use of recycled plastic and more than 90% of recyclable components.
- 03 High serviceability for an increased product's lifespan.
- 04 High-quality, robust and durable materials.
- 05 FPS (Flooding Prevention System) which shuts the machine in case of hydraulic damages.



DIGITAL DISPLAY DD

USER-MACHINE INTUITIVE INTERACTION.

The digital display informs the operator on alerts and fault codes, saving time troubleshooting and bringing operators back to work. It can also confirm machine readiness prior to operation so employees know they are cleaning as intended.

Digital display - informs the operator on alerts and fault codes, saving time troubleshooting and getting operators back to work.

Digital display - confirms machine readiness prior to operation so employees know they are cleaning as intended.



**PLUS
VERSION
HTM
AUTOMATIC
PW-E101**



**VALUE
VERSION**

Warning Signal Lamps
Value versions are equipped with signal lamps to keep everything under control.

BENEFITS

- 01 Improvement of the user – machine interface for a more intuitive use.
- 02 Easy selection of the most appropriate cleaning solution according to the cleaning activity.



AUTOMATIC PRESSURE WASHER

AUTOMATIC VERSION FOR AN EASIER CLEANING.

The AUTOMATIC version allows to set the machine's programs automatically according to the cleaning, degreasing and sanitizing tasks.



BENEFITS


- 01 Machine's performances are adjusted according to specific cleaning needs.
- 02 Through High Temperature Master system (HTM), sanitizing and degreasing are performed at a stable temperature of 100°C., by automatically adjusting flow and pressure.



G6000™ CERAMIC TECH GUN

LONG-LASTING HIGH PERFORMANCES.

The Low Activation Trigger and the comfortable grip are designed to ensure a more comfortable use to the operator.

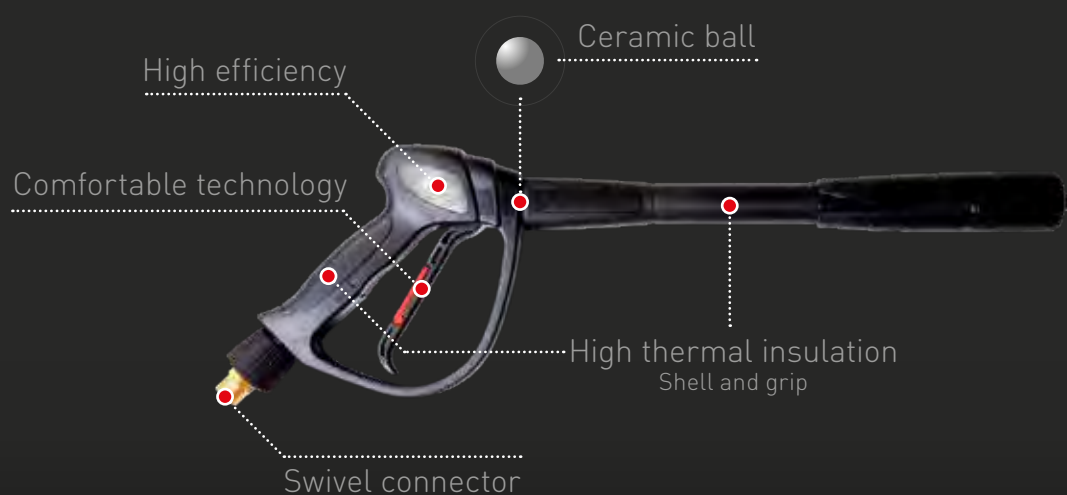

ADVANTAGES

- 01 Best category technical features: 350bar - 45l/min - 160°C.
- 02 Long-lasting gun through the ceramic ball it is provided with. It ensures excellent resistance to wear, corrosion, soap, acids and chlorine.
- 03 Trigger lock to prevent accidental activation.
- 04 Provided with a brass swivel fitting, it prevents twisting of the high-pressure hose.



ALL TERRAIN

EASE OF MOVEMENT.

This is an exclusive feature of IPC: all the models are available in 3 or 4-wheel versions. The machines move easily on any type of floor.

Industrial surface

Rough terrain



ADVANTAGES

- 01 The 3-wheel version can be perfectly handled on all industrial surfaces.
- 02 The 4-wheel version can be easily used on several types of surfaces, such as concrete, rough terrain and gravel.



MODERN MODULAR BUILD UP

REDUCED MAINTENANCE COSTS.

Whatever the need (maintenance and/or fixing action), the new machines' layout allows the operator to easily access the internal components, by removing the cover.



BENEFITS

- 01 User friendly access to internal components, adjustments and refilling for maintenance and / or fixing operations.
- 02 Pump, valve and motor can be easily reached for easy and fast maintenance and/or fixing operations.
- 03 Sturdy structure, high resistant to thermal shocks, weather conditions, and corrosion from chemicals.



IPC'S EXCLUSIVE BOILER

A LONG WORKING LIFE GUARANTEED BY IPC.

The IPC boilers offer the best heating capacity in any working condition.
The structure and internal components are in stainless steel that ensures a longer lifetime.



- Ignition device designed by IPC
- Open top cover
- Stainless steel structure
- Double system heating coil
- Fire-resistant and non-toxic bottom
- O-ring couplings

BENEFITS

- 01 High-performance combustion.
- 02 Stainless steel structure designed by IPC.
- 03 Water inlet and outlet at the bottom of the boiler in order to avoid water stagnation within the coils.



IPC PUMP

RELIABLE AND EFFICIENT.

The exclusive and highly reliable IPC's plunger pump has been tested for more than 2000 working hours, to allow a daily use for more than 8 hours / day.

Reinforced connecting rod
in a special alloy or bronze (depending on the model)

High- and low-pressure water seals
with high durability due to its exclusive IPC design

Brass head
designed for a long working life

Large oil sight glass

High-quality, oversize, and
long-lasting bearings

High-efficiency intake valves
made from stainless steel

Large and extra-hard ceramic pistons
for high resistance to wear and thermal shocks

BENEFITS

- 01 Oversized components to withstand the hardest use.
- 02 Brass head for a long working life.
- 03 The double seals (high- and low- pressure) and the intermediate chamber keep the system cool and also recirculate liquid leaked from worn seals.



M421 Anti-scale

PREVENTS DAMAGE CAUSED BY HARD WATER.

The daily use of the IPC anti-scaling compound reduces maintenance operations on the machine's hydraulic circuit, thus preserving heating performance.

+30%

**MORE EFFICIENT
MORE CONCENTRATED**

**PREVENTS DAMAGES
CAUSED BY HARDWATER**



BENEFITS

- 01 Provides corrosion protection to components in contact with water.
- 02 Reduces maintenance costs due to overpressure on coil pipes with limescale build-up.
- 03 Prevents limescale from forming inside the hot water pressure washer coil, thus reducing fuel costs caused by heat loss.

AUTOMOTIVE



CAR WASHING

- ▶ DEGREASING AND DEWAXING
- ▶ HEAVY DIRT REMOVAL
- ▶ PRE-WASH OPERATIONS

GARAGES/BODY REPAIR SHOPS AND TYRE CENTRES

- ▶ PARTS CLEANING
- ▶ RIM CLEANING
- ▶ PRE-PAINTING OPERATIONS

CAR-HIRE AGENCIES/CAR DEALERS

- ▶ VEHICLE CLEANING
- ▶ PRE-WASH OPERATIONS
- ▶ SECOND HAND CARS RENOVATION

AGRICULTURE



FARMING

- ▶ ANIMAL PEN CLEANING
- ▶ LIVESTOCK TRUCK CLEANING
- ▶ DAIRY BARN AND LABORATORY CLEANING

VITICULTURE

- ▶ CELLAR FLOOR CLEANING
- ▶ CLEANING OF BOTTLING AND AGEING AREAS
- ▶ WINE SHOP CLEANING

CEREAL FARMING AND STORAGE

- ▶ GRAIN STORAGE SILOS
- ▶ GRAIN TRUCKS CLEANING
- ▶ GRAIN EQUIPMENTS CLEANING

CONSTRUCTION AND BUILDING



RENOVATIONS

- ▶ CONCRETE REMOVAL
- ▶ FACADE CLEANING
- ▶ DEBRIS REMOVAL

BUILDINGS

- ▶ EQUIPMENT CLEANING
- ▶ TRUCK CLEANING
- ▶ STORAGE AREA CLEANING

CONCRETE INDUSTRY

- ▶ EQUIPMENT CLEANING
- ▶ TRUCK CLEANING
- ▶ PARKING AND STORAGE AREA CLEANING

MUNICIPALITIES



ROAD MAINTENANCE

- ▶ TUNNEL CLEANING
- ▶ ROAD SURFACE AND PAVEMENT CLEANING
- ▶ MANHOLE AND STREET DRAIN CLEANING

BUILDING MAINTENANCE

- ▶ FACADE CLEANING
- ▶ GRAFFITI REMOVAL
- ▶ CLEANING OF PUBLIC SPACES AND GREEN AREAS

WASTE COLLECTION

- ▶ REFUSE TRUCK CLEANING
- ▶ LANDFILL SITE CLEANING
- ▶ CLEANING OF WASTE CONTAINERS AND BINS

DIY AND GARDENING



OUTDOOR CLEANING

- ▶ PATIO CLEANING
- ▶ MOSS REMOVAL
- ▶ PIPE AND GUTTER CLEANING

GARDENING

- ▶ CLEANING OF LAWNMOWERS AND TRIMMERS
- ▶ OUTDOOR FURNITURE CLEANING
- ▶ CLEANING OF WALLS, PAVEMENTS AND FENCES

CAR AND EQUIPMENT CARE

- ▶ CAR CLEANING
- ▶ UNDERBODY AND RIM CLEANING
- ▶ DIY TOOL CLEANING

HEAVY INDUSTRY



FOOD FACTORIES

- ▶ CONVEYOR BELT CLEANING
- ▶ SANITIZING FILTERS AND GRILLES
- ▶ CLEANING AND DEGREASING OF WORKBENCHES, WALLS AND CEILINGS

OIL AND GAS COMPANIES

- ▶ REMOVAL OF GREASE AND ENCRUSTATIONS FROM STRUCTURES AND STAIRS
- ▶ TANK AND CONTAINER CLEANING
- ▶ PIPE AND EQUIPMENT CLEANING

HEAVY INDUSTRIES

- ▶ GREASE ENCRUSTATIONS REMOVAL
- ▶ PRE-PAINTED PARTS CLEANING
- ▶ HARD FLOOR CLEANING



COLD WATER

EXCLUSIVE TECHNOLOGIES	28
-------------------------------	----

G132/G133	30
------------------	----

SUPERJET	32
-----------------	----

G.POWER-C	34
------------------	----

G.POWER-C PLUS	36
-----------------------	----

N.ELITE-C	38
------------------	----

ATOMAX-C VALUE	40
-----------------------	----

ATOMAX-C PREMIUM	42
-------------------------	----

ATOMAX-C	44
-----------------	----

ROYAL-C	46
----------------	----

PRESS-C VALUE	48
----------------------	----

PRESS-C PREMIUM	50
------------------------	----

PRESS-C	52
----------------	----

PW-C85	54
---------------	----

ABSOLUTE-C	56
-------------------	----

BENZ-C	58
---------------	----

DIESEL-C	60
-----------------	----

FIRE BOX	62
-----------------	----

REMOTE CONTROLS

BY-PASS (BYP)

This system activates the machine's water recycling function when the trigger is released.

IMMEDIATE TOTAL STOP (ITS)

This system instantly stops the machine when the trigger is released.

DELAYED TOTAL STOP (DTS)

Stops the machine 30" seconds after the trigger is released

REMOTE CONTROLLED SAFETY STOP (ST)

The Safety Stop remote control stops the machine 3 minutes after the By-Pass System has been started. The machine needs to be reset to work again. This system prevents pump gaskets from overheating due to prolonged By-Pass System operations.

ENGINE THROTTLE CONTROL (RS)

It reduces engine revolutions when the machine is in by-pass stage. It ensures longer life and reduce fuel consumption.

SAFETY DEVICES

INTELLIGENT PROPORTIONAL SWITCH OFF (IPSF)

This system allows the automatic stop of the machine after a period of inactivity, which varies according to how long the machine has been used.

MICRO LEAKAGE CONTROL (MLC)

The machine stops in case of dangerous leakage in the high pressure hydraulic circuit.

DRY RUNNING PROTECTION (DRP)

It stops the machine in case of lack of water.

THERMOSTATIC VALVE (TSV)

In case of prolonged By-Pass System operation, this system prevents water from overheating inside the high pressure pump.

LANCE NOZZLE CONTROL (NCC)

It stops the machine when the nozzle is clogged.

WORKING HOURS COUNTER (WHC)

It's an electronic hour counter that shows the working hours of the machine.

CONTROLS

FLOODING PREVENTION (FPS)

This system stops the machine after 60 minutes of continuous working

EXCLUSIVE TECHNOLOGIES

	G132 - G133 SUPERJET	G POWER-C (ITS) G POWER-CP (ITS)	ATOMAX-C (VALUE) PRESS-C (VALUE) ATOMAX-C PAINTED PRESS-C PAINTED	N.ELITE-C (DTS) ATOMAX-C (PREM) ROYAL-C (DTS) PRESS-C (PREM) PW-C85 (DTS)	ABSOLUTE-C	BENZ-C DIESEL-C	FIRE BOX
						•	
	•	•					
			•	•			
					•		
						•	
				•			
				•			
				•	•		
					•	•	
				•			
				•			
				•			

G132/G133

PRESSURE

120÷160
bar

FLOW RATE

400÷540
l/h

ABSORBED POWER

1,8÷3,2
kW



G132



G133

EXCLUSIVE CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS
- ▶ COMPACT DESIGN

MOST FREQUENTLY USE

DIY AND GARDENING




SPECS



ALL ACCESSORIES AND POWER CORD CAN BE STORED ON THE UNIT



1,2 LITRE DETERGENT TANK FOR A LOW-PRESSURE DETERGENT DELIVERY



ERGONOMIC ADJUSTABLE HANDLE AND INTEGRATED HOSE REEL FOR EASY TRASPORT AND STORAGE

TECHNICAL DATA

		WITH HOSE REEL		WITH HOSE REEL		
		G132 I 1207 A	G132 I 1307 A	G133 I 1508 A	G133 I 1508 AO	G133 I 1609 AO
Code		IDAF94424	IDAF94426	IDAF94428	IDAF94462	IDAF94430
EAN 13 Bar code		8013378484497	8013378484114	8013378484503	8013378486354	8013378484510
PERFORMANCE						
Operating pressure	bar/Mpa	120/12	130/13	150/15	150/15	160/16
Flow rate	l/h	400	420	500	500	540
Max inlet water temperature	°C	50	50	50	50	50
Power supply	Ph-V-Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
Absorbed power	kW	1,8	2,1	2,5	2,5	3,2
Pump/head		Axial/Aluminium	Axial/Aluminium	Axial/Aluminium	Axial/Brass	Axial/Brass
Automatic Total Stop System		•	•	•	•	•
Detergent tank	l	1,2	1,2	1,2	1,2	1,2
High Pressure Hose	m	8	8	10	10	10
Dimension (LxWxH)	cm	38,7x32,1x91	38,7x32,1x91	43,9x39x95	43,9x39x95	439x390x950
Weight	kg	20	20	25	25	26

STANDARD EQUIPMENT

CODE: IPPR40034
HANDGRIP M22 - M22



CODE: LCPR40225
EXTENSION P375 INOX
M22-QC



CODE: LCPR40226
FOAMER KIT 0,75 l QC



CODE: TBAP40325
HIGH PRESSURE HOSE
8 m - (FOR 1207/1307)



CODE: TBAP40326
HIGH PRESSURE HOSE
10 m - (FOR 1508/1609)



CODE: UGLN40065
H.P. NOZZLE QC LP BLACK



CODE: LCTE40040
TURBO LANCE D.1,15 QC



H.P. NOZZLE RED QC (0°)
UGLN40061 D.092 (FOR 1207)
UGLN40057 D.093 (FOR 1307)
UGLN40053 D.094 (FOR 1508)
UGLN40049 D.098 (FOR 1609)



H.P. NOZZLE GREEN QC (25°)
UGLN40062 D.092 (FOR 1207)
UGLN40058 D.093 (FOR 1307)
UGLN40054 D.094 (FOR 1508)
UGLN40050 D.098 (FOR 1609)



H.P. NOZZLE YELLOW QC (15°)
UGLN40063 D.092 (FOR 1207)
UGLN40059 D.093 (FOR 1307)
UGLN40055 D.094 (FOR 1508)
UGLN40051 D.098 (FOR 1609)



H.P. NOZZLE WHITE QC (40°)
UGLN40064 D.092 (FOR 1207)
UGLN40060 D.093 (FOR 1307)
UGLN40056 D.094 (FOR 1508)
UGLN40052 D.098 (FOR 1609)



OPTIONAL ACCESSORIES

CODE: KTRI40329
ROTATING WATER BRUSH
(BLISTER)



CODE: KTRI40330
FIXED WATER BRUSH
(BLISTER)



CODE: KTRI40331
FOAMER 0,5 l (BLISTER)



CODE: KTRI40325
SURFACE CLEANING
(BLISTER)



CODE: KTRI40324
FLOOR CLEANING
(BLISTER)



CODE: KTRI40327
PIPE CLEANING SET
(BLISTER)



CODE: KTRI40328
SANDBLASTING SET
(BLISTER)



SUPERJET

PRESSURE

130÷160
bar

FLOW RATE

480÷600
l/h

ABSORBED POWER

2,5÷2,9
kW



EXCLUSIVE CHARACTERISTICS

▶ IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE



CODE: KTRI40418
WALL SUPPORT KIT AND HOSE REEL
(OPTIONAL ACCESSORIES)
WITHOUT HOSE

CODE: KTRI40417
TROLLEY KIT
(OPTIONAL ACCESSORIES)

SPECS



PLUNGER PUMP WITH BRASS
HEAD AND PISTONS CERAMIC
COATED



ADJUSTABLE PRESSURE AND
DETERGENT DELIVERY



ADJUSTABLE PRESSURE -
PROFESSIONAL PRESSURE
GAUGE.

TECHNICAL DATA

		SUPER JET I1508P M	SUPER JET I1609P M	SUPER JET I1310P M
Code		IDAF94362	IDAF94363	IDAF94364
PERFORMANCE				
Operating pressure	bar/Mpa	150/15	160/16	130/13
Flow rate	l/h	480	540	600
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/12	1-230-50/14	1-230-50/14
Absorbed power	kW	2,5	2,9	2,9
Motor pole/rpm		2-2800	2-2800	2-2800
Remote control		ITS	ITS	ITS
Pump/head/pistons		plunger/brass/ceramic	plunger/brass/ceramic	plunger/brass/ceramic
Detergent tank	l	-	-	-
Deterget delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	46x28x26	46x28x26	46x28x26
Weight	Kg	17,2	19,6	19,6

STANDARD EQUIPMENT

CODE: IPIP40009 HANDGRIP 1/4M M22	CODE: LCPR40152 LANCE P400 M22 1,05NE (FOR 1508)	CODE: LCPR40154 LANCE P400 M22 1,00RS (FOR 1609)	CODE: LCPR40162 LANCE P400 M22 1,21BI (FOR 1310)	CODE: TBAP40210 HIGH PRESSURE HOSE 1/4 8 m
				

OPTIONAL ACCESSORIES

CODE: KTRI40632 TROLLEY KIT	CODE: KTRI40419 HOSE REEL KIT FOR TROLLEY (WITHOUT HOSE TO COMBINE WITH KTRI40632)	CODE: KTRI40442 HOSE REEL KIT FOR TROLLEY (WITH 15MT HOSE TO COMBINE WITH KTRI40632)	CODE: KTRI40418 WALL SUPPORT KIT + HOSE REEL (WITHOUT HOSE)	CODE: KTRI40443 WALL SUPPORT KIT + HOSE REEL + HOSE 15 m
				
CODE: LCPR40155 TURBO LANCE TTR-16 M22 1,15 (FOR 1609)	CODE: LCPR40151 TURBO LANCE TPR-20 M22 1,30 (FOR 1310)	CODE: LCPR40150 TURBO LANCE TTR-16 M22 1,25 (FOR 1508)		
				

PORTOTECNICA™

member of **IPC**

HIGH PRESSURE WASHERS - COLD WATER

G.POWER-C

IMMEDIATE TOTAL STOP MODELS

PRESSURE

150÷180
bar

FLOW RATE

540÷800
l/h

ABSORBED POWER

2,7÷4,9
kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP

SPECS



DESIGNED FOR AN EASY AND RAPID MAINTENANCE



STANDARD SUPPORTS FOR ACCESSORIES TO HAVE THEM READY TO BE USED



LANCE SUPPORT

TECHNICAL DATA

		G.POWER-C I1509P M	G.POWER-C I1813P T
Code		IDAF94194	IDAF94198
PERFORMANCE			
Operating pressure	bar/Mpa	30-150/3-15	30-180/3-18
Flow rate	l/h	300-540	400-800
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz/A	1-230-50/12	3-400-50/9,2
Absorbed power	kW	2,8	4,9
Motor pole/rpm		2-2800	2-2800
Remote control		ITS	ITS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	3	3
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	49x40x93	49x40x93
Weight	Kg	30	35,4

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40057
EXTENSION P580
Ø 1,20 GL (FOR 1509)



CODE: LCPR40046
EXTENSION P580
Ø 1,50AZZ (FOR 1813)



CODE: TBAP28305
HIGH PRESSURE HOSE 8 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90
(NOZZLE NOT INCLUDED)



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCLC49492
LANCE FOR WASHING
FLOORS Ø 0,35 (FOR 1509)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS Ø 0,45 -
(FOR 1813)



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 -
(FOR 1813)



CODE: LCPR24943
SANDBLASTER KIT Ø 1,3
(FOR 1509)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40040
FOAMER KIT



CODE: LCPR93177
TURBO LANCE TTR-16 M22
1,30 - (FOR 1509/1813)



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: KTRI40318
MAINTENANCE KIT 500H
(FOR 1509/1813)



CODE: KTRI40478
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1509/1813)



PORTOTECNICA™

member of **IPC**

HIGH PRESSURE WASHERS - COLD WATER

G.POWER-C PLUS

IMMEDIATE TOTAL STOP

PRESSURE

150÷180
bar

FLOW RATE

540÷800
l/h

ABSORBED POWER

2,8÷4,7
kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

WITH HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP

SPECS



SOLID STRUCTURE:
RESISTANT TO SHOCKS,
ATMOSPHERIC AGENTS AND
CHEMICAL CORROSION



IPC PUMP WITH SEPARATE
BY-PASS, AND ADJUSTABLE
PRESSURE



PROFESSIONAL HOSE REEL

TECHNICAL DATA

		G.POWER-CP I1509P M	G.POWER-CP I1813P T
Code		IDAF94195	IDAF94199
PERFORMANCE			
Operating pressure	bar/Mpa	30-150/3-15	30-180/3-18
Flow rate	l/h	300-540	400-800
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz/A	1-230-50/12	3-400-50/8,6
Absorbed power	kW	2,8	4,7
Motor pole/rpm		2-2800	2-2800
Remote control		ITS	ITS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	3	3
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	49x40x93	49x40x93
Weight	Kg	32,8	38

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40057
EXTENSION P580
Ø1,20 GL (FOR 1509)



CODE: LCPR40046
EXTENSION P580
Ø1,50 AZZ (FOR 1813)



CODE: LCPR93177
TURBO LANCE TTR-16 M22
1,30 - (FOR 1509/1813)



CODE: TBAP93827
HIGH PRESSURE HOSE
12 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90
(NOZZLE NOT INCLUDED)



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCLC49492
LANCE FOR WASHING
FLOORS (FOR 1509)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 - (FOR 1813)



CODE: LCPR13557
SANDBLASTER KIT Ø1,6 -
(FOR 1813)



CODE: LCPR24943
SANDBLASTER KIT Ø1,3
(FOR 1509)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40040
FOAMER KIT



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: KTRI40318
MAINTENANCE KIT 500H
(FOR 1509/1813)



CODE: KTRI40478
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1509/1813)



N.ELITE-C TOTAL STOP MODELS

PRESSURE

130÷190
bar

FLOW RATE

600÷900
l/h

ABSORBED POWER

3,1÷ 4,9
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS ("D" MODELS)
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF ("D" MODELS)
- ▶ MICRO LEAKAGE CONTROL - MLC ("D" MODELS)
- ▶ NOZZLE CLOGGED CONTROL - NCC ("D" MODELS)
- ▶ WORKING HOURS COUNTER - WHC ("D" MODELS)
- ▶ FLOODING PREVENTION SYSTEM - FPS ("D" MODELS)
- ▶ DRY RUNNING PROTECTION - DRP (ONLY 1915P4)



WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL

SPECS



PRESSURE ADJUSTMENT
KNOB



LARGE FRONT FOOT FOR
GREATER STABILITY



ERGONOMIC HANDLE,
LANCE HOLDER AND HOSE
SUPPORTS

TECHNICAL DATA

DELAYED TOTAL STOP - 4 POLES

		N.ELITE-CD1310P4 M	N.ELITE-CD1915P4 T
Code		IDAF40428	IDAF40436
PERFORMANCE			
Operating pressure	bar/Mpa	30-130/3-13	30-190/3-19
Flow rate	l/h	300-600	450-900
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,5	3-400-50/10
Absorbed power	kW	3,1	4,9
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	7,5	7,5
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	74x43x81	74x43x81
Weight	Kg	43	49

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40048
EXTENSION P580
Ø 1,35BLU (FOR 1310P4)



CODE: LCPR40047
EXTENSION P580
Ø 1,45GLO (FOR 1915)



CODE: TBAP40256
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90
(NOZZLE NOT INCLUDED)



CODE: RCIN10810/RCIN40059
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT (10m)



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 (FOR 1310)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,55 (FOR 1915)



CODE: LCPR13557
SANDBLASTER KIT Ø1,6
(FOR 1915P4)



CODE: LCPR14858
SANDBLASTER KIT Ø1,4
(FOR 1310P4)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
TURBO LANCE TTR-16 M22
1,35 (FOR 1310)



CODE: LCPR40053
TURBO LANCE TPR-20
M22 1,50 (FOR 1915)



CODE: SPID24939
FOAMER KIT



CODE: LCPR40040
FIXED HYDROBRUSH
LANCE



CODE: KTRI40311
MAINTENANCE KIT 500H
(FOR 1310P4)



CODE: KTRI40313
MAINTENANCE KIT 500H
(FOR 1915P4)



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION



ATOMAX-C VALUE

PRESSURE

110÷190
bar

FLOW RATE

500÷900
l/h

ABSORBED POWER

2,9÷4,9
kW



EXCLUSIVE CHARACTERISTICS

▶ DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE



INNOVATION



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

		ATOMAX-C D1112P4M	ATOMAX-C D1310P4 M	ATOMAX-C D1708P4M	ATOMAX-C D1813PT	ATOMAX-C D1814P4T	ATOMAX-C D1915P4T
CODE		IDAF40961	IDAF40962	IDAF40963	IDAF40964	IDAF40965	IDAF40966
PERFORMANCE							
Operating pressure	bar/Mpa	30-110/3-11	30-130/3-13	30-170/3-17	30-180/3-18	30-180/3-18	30-190/3-19
Flow rate	l/h	300-720	300-600	400-500	450-800	450-840	450-900
Max inlet water temperature	°C	50	50	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,3	1-230-50/14,1	1-230-50/14,5	3-400-50/9,3	3-400-50/9,6	3-400-50/10,3
Absorbed power	kW	3	2,9	3	4,9	4,6	4,9
Motor pole/rpm		4-1400	4-1400	4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic
Detergent tank	l	-	-	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	67x42x95	67x42x95	67x42x95	67x42x95	67x42x95	67x42x95
Weight	Kg	40,2	40,1	40,2	41,8	46,8	47,3

STANDARD EQUIPMENT

CODE: IPPR40025
**HANDGRIP G6000 +
EXTENSION P330+M22**



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN05200
**H.P. NOZZLE 1/4 1505
(FOR 1112P4)**



CODE: UGLN11196
**H.P. NOZZLE 1/4 15035 -
(FOR 1310P4)**



CODE: UGLN75421
**H.P. NOZZLE 1/4 15025 -
(FOR 1708P4)**



CODE: UGLN49987
**H.P. NOZZLE LANCE 1/4
15045 - (FOR 1813P
/1814P4/1915P4)**



CODE: TBAP40229
H.P. HOSE 1/4" 10 m



OPTIONAL ACCESSORIES

CODE: KTRI40505
**HOSE REEL KIT (WITHOUT
HOSE)**



CODE: KTRI40506
**HOSE REEL KIT (WITH 20 m
HOSE)**



CODE: LCPR29360
**MUDGUARD LANCE P90
(NOZZLE NOT INCLUDED)**



CODE: RCIN10810/RCIN40059
HOSE COUPLINGS M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: LCLC49492
**LANCE FOR WASHING
FLOORS 0,35 (FOR
1310P4/1708P4)**



CODE: LCLC49493
**LANCE FOR WASHING
FLOORS 0,45 (FOR 1112P4/
1813P/1814P4/1915P4)**



CODE: LCPR14859
**SANDBLASTER KIT Ø1,5 mm
(FOR 1112P4/1813P/1814P4
/1915P4)**



CODE: LCPR24943
**SANDBLASTER KIT Ø1,3 -
(FOR 1310P4)**



CODE: LCPR14857
**SANDBLASTER KIT Ø1,2 -
(FOR 1708P4)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
**FIXED HYDROBRUSH
LANCE**



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40053
**TURBO LANCE TPR-20 +
M22 Ø1,50 -(FOR1112P4/1
813P/1814P4/1915P4)**



CODE: LCPR93178
**TURBO LANCE TTR-16 +
M22 Ø1,35
(FOR 1310P4)**



CODE: LCPR40011
**TURBO LANCE
TTR-16 + M22 Ø 1,15
(FOR 1708P4)**



CODE: KTRI40587
**MAINTENANCE KIT 500H
(FOR 1813P)**



CODE: KTRI40586
**MAINTENANCE KIT 500H
(FOR 1112P4/1310P4/
1708P4)**



CODE: KTRI40588
**MAINTENANCE KIT 500H
(FOR 1814P4/1915P4)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION -
(FOR 1813P)**



CODE: KTRI40479
**KIT FOR HOT WATER FEEDING
VERSION (FOR 1112P4/1310P4
/1708P4/1814P4/1915P4)**



ACCESSORIES TO DELIVER CHEMICAL PRODUCT

OPTION (1)

CODE: LCPR40040
FOAMER KIT 1 l



OPTION (2)

CODE: KTRI40527
EJECTOR KIT + P70 HYJET



ATOMAX-C PREMIUM

PRESSURE

170÷190
bar

FLOW RATE

500÷900
l/h

ABSORBED POWER


3÷4,9
kW

EXCLUSIVE
CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED
- ▶ WARNING LEDS
- ▶ DRY RUNNING PROTECTION - DRP



MOST FREQUENTLY USE

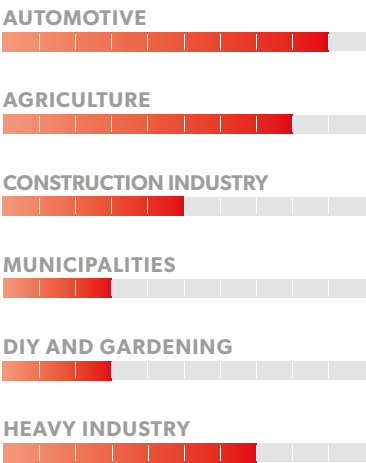

INNOVATION



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

		ATOMAX-C DP1708P4 M	ATOMAX-C DP1814P T	ATOMAX-C DP1915P4 T
CODE		IDAF40969	IDAF40971	IDAF40972
PERFORMANCE				
Operating pressure	bar/Mpa	30-170/3-17	30-180/3-18	30-190/3-19
Flow rate	l/h	400-500	450-840	450-900
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,5	3-400-50/9,6	3-400-50/10,3
Absorbed power	kW	3	4,6	4,9
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	67x42x95	67x42x95	67x42x95
Weight	Kg	40	47	48,2

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 +
EXTENSION P330+M22



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN75421
H.P. NOZZLE 1/4 15025
(FOR 1708P4)



CODE: UGLN49987
H.P. NOZZLE LANCE 1/4
15045 - (FOR 1814P4/1915P4)



CODE: TBAP40229
H.P. HOSE R1 10 m 1/4"



OPTIONAL ACCESSORIES

CODE: KTRI40505
HOSE REEL KIT (WITHOUT
HOSE)



CODE: KTRI40506
HOSE REEL KIT (WITH 20 m
HOSE)



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810 / RCIN40059
HOSE COUPLINGS M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 - (FOR
1708P4)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 (FOR
1814P4/1915P4)



CODE: LCPR14859
SANDBLASTER KIT Ø1,5mm
(FOR 1814P4 / 1915P4)



CODE: LCPR14857
SANDBLASTER KIT Ø1,2 -
(FOR 1708P4)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40053
TURBO LANCE TPR-20
+ M22 Ø1,50 - (FOR
1814P4/1915P4)



CODE: LCPR40011
TURBO LANCE
TTR-16 + M22 Ø1,15
(FOR 1708P4)



CODE: KTRI40586
MAINTENANCE KIT 500H
(FOR 1310P4/ 1708P4)



CODE: KTRI40588
MAINTENANCE KIT 500H
(FOR 1814P4/1915P4)



CODE: KTRI40586
KIT FOR HOT WATER FEEDING
VERSION (FOR 1310P4/
1708P4/1814P4/1915P4)



ACCESSORIES TO DELIVER CHEMICAL PRODUCT

OPTION (1)

CODE: LCPR40040
FOAMER KIT 1 l



OPTION (2)

CODE: KTRI40527
EJECTOR KIT + P70 HYJET



member of **IPC**

ATOMAX-C (PAINTED STEEL STRUCTURE)

PRESSURE

130÷190
bar

FLOW RATE

600÷900
l/h

ABSORBED POWER

2,8÷4,9
kW



EXCLUSIVE
CHARACTERISTICS

▶ DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE



INNOVATION



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP

SPECS



IPC PLUNGER PUMP WITH BRASS
HEAD AND CERAMIC PISTONS



HEAVY-DUTY STRUCTURE, ANTI
COLLISION, STEEL FRAME COVER



LARGE WHEELS IMPROVE
MANEUVERABILITY AND EASY
TRANSPORT

TECHNICAL DATA

		ATOMAX-C D1310P4m M	ATOMAX-C D1915P4m T
CODE		IDAF41110	IDAF41111
PERFORMANCE			
Operating pressure max	bar/Mpa	40-130/4-13	40-190/4-19
Flow rate	l/h	300-600	360-900
Inlet water max. temperature	°C	50	50
Power supply	Ph-V-Hz/A	1-230-50/13,4	3-400-50/10,2
Absorbed power	kW	2,8	4,9
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-
Detergent delivery		-	-
Dimension (LxWxH)	cm	78x45x100	78x45x100
Weight	Kg	47,8	53,6

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 +
EXTENSION P330+M22



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN11196
H.P. NOZZLE 1/4 15035
(FOR 1310)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915)



CODE: TBAP40229
H.P. HOSE 10 m 1/4"



OPTIONAL ACCESSORIES

CODE: RCIN10810 /RCIN40059
HOSE COUPLINGS
M22-M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: KTRI40505
HOSE REEL KIT



CODE: KTRI40506
HOSE REEL KIT (WITH 20M
H.P HOSE)




CODE: TBAP40229
H.P.HOSE R1 15 m 5/16"




CODE: TBAP44379
H.P.HOSE R1 20 m N5/16"



CODE: LCPR13557
SANDBLASTER KIT D.1,6 -
(FOR 1915)



CODE: LCPR14858
SANDBLASTER KIT D.1,4 -
(FOR 1310)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
TURBO LANCE TTR-16
Ø1,35



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 - (FOR 1310)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 - (FOR 1915)



ACCESSORIES TO DELIVER CHEMICAL PRODUCT

OPTION (1)

CODE: LCPR40040
FOAMER KIT 1 l



OPTION (2)

CODE: KTRI40527
EJECTOR KIT + P70 HYJET



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION



ROYAL-C

DELAYED TOTAL STOP MODELS

PRESSURE

160÷210
bar

FLOW RATE

1000÷1300
l/h

ABSORBED POWER

6,3÷6,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP)
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC)
- ▶ FLOODING PREVENTION SYSTEM - FPS



WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL

SPECS



PROFESSIONAL PRESSURE
GAUGE ENABLING A
CONSTANT CHECK OF
WORKING PRESSURE



LARGE DIAMETER WHEELS
(PUNCTURE PROOF)



STURDY PAINTED STEEL
FRAME

TECHNICAL DATA

ROYAL-C D2117P4 T IDAF40346

Code

PERFORMANCE

Operating pressure	bar/Mpa	30-210/3-21
Flow rate	l/h	1000
Max inlet water temperature	°C	50
Power supply	Ph-V-Hz/A	3-400-50/12
Absorbed power	kW	6,4
Motor pole/rpm		4-1400
Remote control		DTS
Pump/head/pistons		lpc plunger/brass/ceramic
Detergent tank	l	4
Detergent delivery		low pressure
Dimension (LxWxH)	cm	77x51x88
Weight	Kg	68,2

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40047
EXTENSION P580 1,45
GLO (FOR 2117)



CODE: TBAP40256
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: SPID24911
HYDROBRUSH LANCE



CODE: RCIN10810 / RCIN40059
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 m
(FOR 2117)



CODE: LCPR40040
FOAMER KIT 1 l




CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR14859
SANDBLASTER KIT Ø1,5
(FOR 2117)



CODE: LCPR14860
SANDBLASTER KIT Ø1,7
(FOR 1622)



CODE: LCPR40054
TURBO LANCE TPR255
M22 0,40 - (FOR 2117)



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: KTRI40338
MAINTENANCE KIT 500H
(FOR 2117)



CODE: KTRI40436
MAINTENANCE KIT 500H
(FOR 1622)



CODE: LCLC49494
LANCE FOR WASHING
FLOOR 0,55



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION - (2117)



PRESS-C VALUE

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER


6,4÷8,4
kW



EXCLUSIVE CHARACTERISTICS

▶ DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE

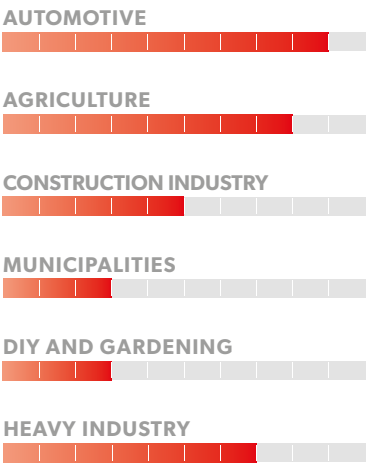

INNOVATION



SPECS



COLLAPSIBLE HANDLE FOR COMPACT STORAGE AND EASY TRANSPORT



NEW STORAGE SPACE FOR ALL EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL FILL-EMPTY SYSTEM FOR A RAPID MAINTENANCE

TECHNICAL DATA

		PRESS-C D2117P4 T	PRESS-C D1721P4 T	PRESS-C D2021P4 T	PRESS-C D2515P4 T
CODE		IDAF40977	IDAF40978	IDAF40979	IDAF40980
PERFORMANCE					
Operating pressure	bar/Mpa	30-210/3-21	30-170/3-17	30-200/3-20	30-250/3-25
Flow rate	l/h	300-1000	300-1300	400-1300	450-900
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/13,3	3-400-50/14	3-400-50/15,8	3-400-50/14,9
Absorbed power	kW	6,4	7,3	8,4	7,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic	IPC plunger/brass/ ceramic
Detergent tank	l	-	-	-	-
Detergent delivery	Optional	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	88x48x104	88x48x104	88x48x104	88x48x104
Weight	Kg	65,4	67,3	73,2	73,1

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 M22



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 1721/2117)



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 2021/2515)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2117)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1721)



CODE: TBAP25324
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: KTRI40505
HOSE REEL KIT (WITHOUT
HOSE)



CODE: KTRI40506
HOSE REEL KIT (WITH 20 m
HOSE)



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1721/2021)



CODE: TBAP23853
DRAIN KIT 10 m
(FOR 2117)



CODE: RCIN10810/RCIN40059
HOSE COUPLINGS M22



CODE: LCPR14859
SANDBLASTER KIT Ø1,5 mm
(FOR 2117P)



CODE: LCPR14858
SANDBLASTER KIT Ø1,4 mm
(FOR 2515P)



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40135
EXTENSION P70 + TPR-
255 Ø0,45 (FOR 2117)



CODE: LCPR40170
EXTENSION P70 + R.J.255
Ø0,75 (FOR 1721)



CODE: LCPR40174
EXTENSION P70 + R.J.255
Ø0,70 (FOR 2021)



CODE: LCPR40103
EXTENSION P70 + TPR-
255 Ø0,40 (FOR 2515)




CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: LCLC49494
LANCE FOR WASHING
FLOORS 0,55



CODE: KTRI40590
MAINTENANCE KIT 500H
(FOR 1721P/2021P)



CODE: KTRI40589
MAINTENANCE KIT 500H
(FOR 2117P)



CODE: KTRI40591
MAINTENANCE KIT 500H
(FOR 2515)



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117)



CODE: KTRI40323
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1721/2021)



CODE: KTRI40304
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2515)



CODE: PRCH40041
SAND BAG 25 Kg



ACCESSORIES TO DELIVER CHEMICAL PRODUCT

OPTION (1)

CODE: LCPR40040
FOAMER KIT 1 l



OPTION (2)

CODE: KTRI40527
EJECTOR+P70 HY.JET



member of **IPC**

PRESS-C PREMIUM

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER


6,4÷8,4
kW

EXCLUSIVE
CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED
- ▶ WARNING LEDS
- ▶ DRY RUNNING PROTECTION - DRP



MOST FREQUENTLY USE

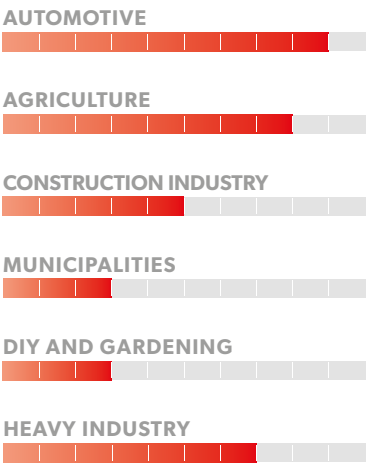

INNOVATION



G6000™
CERAMIC
HIGH-TECH
GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

		PRESS-C DP2117P4 T	PRESS-C DP1721P4 T	PRESS-C DP2021P4 T	PRESS-C DP2515P4 T
CODE		IDAF40981	IDAF40982	IDAF40983	IDAF40984
PERFORMANCE					
Operating pressure	bar/Mpa	30-210/3-21	30-170/3-17	30-200/3-20	30-250/3-25
Flow rate	l/h	300-1000	300-1300	400-1300	450-900
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/13,3	3-400-50/14	3-400-50/15,8	3-400-50/14,9
Absorbed power	kW	6,4	7,3	8,4	7,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery	Optional	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	88x48x104	88x48x104	88x48x104	88x48x104
Weight	Kg	61	61	68,5	69

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 M22



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 1721/2117)



CODE: LCPR40159
LANCE P70 INOX 0°
(FOR 2021/2515)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2117)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE LANCE 1/4
25075 - (FOR 1721)



CODE: TBAP25324
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: KTRI40505
HOSE REEL KIT (WITHOUT
HOSE)



CODE: KTRI40506
HOSE REEL KIT (WITH 20 m
HOSE)



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1721/2021)



CODE: RCIN10810
HOSE COUPLINGS M22



CODE: RCIN10810/RCIN40059
HOSE COUPLINGS M22



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 2117P)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 2515P)



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40135
EXTENSIO NP70 + TPR-
255 Ø0,45 (FOR 2117)



CODE: LCPR40170
EXTENSION P70 + R.J.255
Ø0,75 (FOR 1721)



CODE: LCPR40174
EXTENSION P70 + R.J.255
Ø0,70 (FOR 2021)



CODE: LCPR40103
EXTENSION P70 + TPR-
255 Ø0,40 (FOR 2515)



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: LCLC49494
LANCE FOR WASHING
FLOORS 0,55



CODE: KTRI40590
MAINTENANCE KIT 500H
(FOR 1721P/2021P)



CODE: KTRI40589
MAINTENANCE KIT 500H
(FOR 2117P)




CODE: KTRI40591
MAINTENANCE KIT 500H
(FOR 2515)



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117)



CODE: KTRI40323
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1721/2021)



CODE: KTRI40304
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2515)



CODE: PRCH40041
SAND BAG 25 Kg



ACCESSORIES TO DELIVER CHEMICAL PRODUCT

OPTION (1)

CODE: LCPR40040
FOAMER KIT 1 l



OPTION (2)

CODE: KTRI40527
EJECTOR+P70 HY.JET



member of **IPC**

PRESS-C

(PAINTED STEEL STRUCTURE)

PRESSURE

170÷210
bar

FLOW RATE

1000÷1300
l/h

ABSORBED POWER

6,9÷8,1
kW



**EXCLUSIVE
CHARACTERISTICS**

► DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE



INNOVATION



SPECS



IPC PLUNGER PUMP WITH BRASS
HEAD AND CERAMIC PISTONS



HEAVY-DUTY STRUCTURE, ANTI
COLLISION, STEEL FRAME COVER



LARGE WHEELS IMPROVE
MANEUVERABILITY AND EASE
TRANSPORT

TECHNICAL DATA

		PRESS-C D2117P4m T	PRESS-C D1721P4m T	PRESS-C D2021P4m T
CODE		IDAF41112	IDAF41113	IDAF41114
PERFORMANCE				
Operating pressure max	bar/Mpa	40-210/4-21	40-170/4-17	40-200/4-20
Flow rate	l/h	360-1000	360-1300	390-1300
Inlet water max. temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/13,6	3-400-50/13,8	3-400-50/15,8
Absorbed power	kW	6,9	7,1	8,1
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-
Detergent delivery	Optional	-	-	-
Dimension (LxWxH)	cm	78x45x100	78x45x100	78x45x100
Weight	Kg	66,40	68	68,4

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 +
EXTENSION P330+M22



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 2017)



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 1721/2021)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2117)



CODE: UGLN49997
H.P. NOZZLE 1/4 15075
(FOR 1721)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065 -
(FOR 2021)



CODE: TBAP25324
H.P. HOSE R1 10 m
5/16"



OPTIONAL ACCESSORIES

CODE: RCIN10810/RCIN40059
HOSE COUPLINGS M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: TBAP24406
DRAIN KIT 20 m - M22 -
(FOR 1721/2021)



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP40062
H.P. HOSE R1 15m 5/16"



CODE: TBAP44379
H.P. HOSE R1 20 m N5/16"



CODE: LCPR13557
SANDBLASTER KIT D.1,6 -
(FOR 1915)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40054
TURBO LANCE TPR255
Ø0,40 - (FOR 2117)



CODE: LCPR40131
EXTENSION P70 + R.JET
255 Ø0,75 - (FOR 1721)



CODE: LCPR40132
EXTENSION P70 + R.JET
255 Ø0,65 - (FOR 2021)



CODE: KTRI40505
HOSE REEL KIT



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117)



CODE: KTRI40323
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1721)



CODE: KTRI40436
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2021)



ACCESSORIES TO DELIVER CHEMICAL PRODUCT

OPTION (1)

CODE: LCPR40040
FOAMER KIT 1 l



OPTION (2)

CODE: KTRI40527
EJECTOR KIT + P70 HYJET



member of **IPC**

PW-C85

PRESSURE

200÷350
bar

FLOW RATE

900÷1800
l/h

ABSORBED POWER

12,3÷12,5
kW

EXCLUSIVE
CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITC OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC)
- ▶ FLOODING PREVENTION SYSTEM - FPS

PAINTED STEEL STRUCTURE

MOST FREQUENTLY USE



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL

SPECS



IPC PLUNGER PUMP WITH
BRASS HEAD AND CERAMIC
PISTONS



HEAVY-DUTY STRUCTURE,
ANTI-COLLISION, STEEL
FRAME COVER



MAINTENANCE-FREE
ELECTRIC MOTOR, AIR-
COOLED AND PROTECTED
WITH THERMAL CUTOUT

TECHNICAL DATA

TOTAL STOP MODELS		15 HP	
		PW-C85 D2030P4 T	PW-C85 D3515P4 T
Code		IDAF40832	IDAF40827
PERFORMANCE			
Operating pressure	bar/Mpa	40-200/4-20	350/35
Flow rate	l/h	390-1800	900
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz/A	3-400-50/23	3-400-50/22,4
Absorbed power	kW	12,5	12,3
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-
Detergent delivery	Optional	-	-
Dimension (LxWxH)	cm	78x59x90	78x59x90
Weight	Kg	111,3	110

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000
(FOR 2030)



CODE: IPIP42787
GRIP RL 56 M24 + 3/8
(FOR 3515)



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 2030)



CODE: LCLC42786
EXTENSION L=105 cm
(FOR 3515)



CODE: UGLN02314
H.P. NOZZLE 1/4 2510
(FOR 2030)



CODE: UGLN40026
H.P. NOZZLE 1/4 15035
500 BAR (FOR 3515)



CODE: TBAP40010
H.P. HOSE R2 10 m 3/8"
M22 (FOR 2030)



CODE: TBAP00029
H.P. HOSE R2 10 m 5/16"
3/8M-M - (FOR 3515)



OPTIONAL ACCESSORIES

CODE: RCIN10810/RCIN40059
HOSE COUPLINGS M22
(NOT FOR 3515)



CODE: TBAP24406
DRAIN KIT 20 m
(NOT FOR 3515)



CODE: LCPR29360
MUDGUARD LANCE P90
(NOT FOR 3515)



CODE: LCPR40040
FOAMER HEAD KIT 1 l
(NOT FOR 3515)



CODE: LCLC40022
SANDBLASTER KIT P105 cm
Ø0,35 (FOR 3515)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40133
EXTENSION P70 + R.J.255
Ø100 (FOR 2030)



CODE: LCLC47893
EXTENSION 105 cm
TURBO Ø035 (FOR 3515)



CODE: KTRI40400
HOSE REEL KIT (FOR 2030)



CODE: KTRI40441
MAINTENANCE KIT 500H
(FOR 2030)



CODE: KTRI40440
MAINTENANCE KIT 500H
(FOR 3515)



ABSOLUTE-C

PRESSURE

200÷500
bar

FLOW RATE

1000÷2500
l/h

ABSORBED POWER

16÷22
kW




Ø40 STEEL TUBE FRAME WITH STAINLESS STEEL COVER

EXCLUSIVE CHARACTERISTICS

- ▶ THERMOSTATIC VALVE - TSV
- ▶ REMOTE-CONTROLLED SAFETY STOP - ST
- ▶ DRY RUNNING PROTECTION - DRP

MOST FREQUENTLY USE

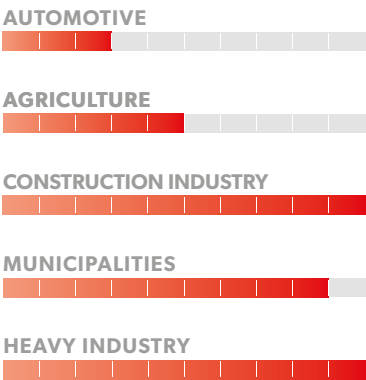

INNOVATIONS



SPECS



PROFESSIONAL PRESSURE GAUGE ENABLING THE CONSTANT MONITORING OF WORKING PRESSURE



HIGH-CAPACITY & SELF-CLEANING FILTER



THERMOSTATIC VALVE PROTECTING THE PUMP FROM POSSIBLE OVERHEATING

TECHNICAL DATA

Code		ABSOLUTE-C S2041P T IDAF40349	ABSOLUTE-C S3521P T IDAF40350	ABSOLUTE-C S5015P T IDAF40351	ABSOLUTE-C S5022P T IDAF40932
PERFORMANCE					
Operating pressure	bar/Mpa	200/20	350/25	500/50	500/50
Flow rate	l/h	2500	1300	1000	1320
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/31	3-400-50/29,8	3-400-50/30,6	3-400-50/39,3
Absorbed power	kW	17,5	17,5	16	22
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		ST	ST	ST	ST
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		-	-	-	-
Dimension (LxWxH)	cm	120x70x100	120x70x100	120x70x100	120x70x100
Weight	Kg	180	178,4	184,6	220

STANDARD EQUIPMENT

CODE: IPPR40006
**HANDGRIP G3600 + P330
M24 (FOR 2041)**



CODE: IPPR40005
**HANDGRIP G7300 +
EXTENSION330 M24 M24
(FOR 3521)**



CODE: IPPR40024
**HANDGRIP ST3600 +
P380 M24
(FOR 5015/5022)**



CODE: LCPR40028
**EXTENSION P70 INOX
M24 (FOR 2041)**



CODE: LCPR40026
**EXTENSION P70 INOX M24
(FOR 3521/5015/5022)**



CODE: UGLN07790
**H.P NOZZLE 1/4 2513
(FOR 2041)**



CODE: UGLN05200
**H.P NOZZLE 1/4 1505
(FOR 3521)**



CODE: UGLN40018
**H.P NOZZLE 1/4 15028
500BAR (FOR 5015)**



CODE: UGLN40040
**H.P NOZZLE 1/4 15040
(FOR 5022)**



CODE: TBAP40050
**H.P HOSE R3 15 m 3/8" M24
(FOR 3521/5015/5022)**



CODE: TBAP40054
**H.P HOSE R2 15 m 1/2"
M24 (FOR 2041)**



OPTIONAL ACCESSORIES

CODE: RCIN40011
**HOSE COUPLINGS M24
500B (FOR 5015)**



CODE: RCIN40012
**HOSE COUPLINGS M24 HF
(FOR 2041/3521)**



CODE: LCPR40032
**ROTATING LANCE P70
M24 (FOR 3521)**



CODE: LCPR40033
**ROTATING LANCE P70
M24 (FOR 2041)**



CODE: LCPR40031
**ROTATING LANCE P70
M24(FOR 5015)**



CODE: LCPR40173
**ROTATING LANCE P70 M24
(FOR 5022)**



CODE: TBAP40070
**DRAIN KIT 10 m M24 CD.03
INOX (FOR 5015)**



CODE: TBAP40071
**DRAIN KIT 15 m M24
CD.03 INOX (FOR 5015)**



CODE: TBAP40072
**DRAIN KIT 10 m M24
CD.05 INOX
(FOR 3521 /5022)**



CODE: TBAP40073
**DRAIN KIT 15 m M24
CD.05 INOX
(FOR 3521 /5022)**



CODE: LCPR40142
**SANDBLASTER KIT 15028
(FOR 5015)**



CODE: LCPR40144
**SANDBLASTER KIT 1505
(FOR 3521)**



CODE: LCPR40172
**SANDBLASTER KIT 15040
(FOR 5022)**



CODE: PRCH40041
SAND BAG 25 Kg



BENZ-C

ENDOTHERMIC ENGINE

PRESSURE

180÷250
bar

FLOW RATE

540÷1300
l/h

ENGINE POWER

6,5÷13
Hp



BENZ-C H1809 A



BENZ-C H1811P




BENZ-C H2515P P
BENZ-C H DL2515P P
BENZ-C L2216P P
BENZ-C L2021P P
BENZ-C L DL2217P P
BENZ-C L DL2021P P

HONDA SERIES
GASOLINE ENGINE

EXCLUSIVE
CHARACTERISTICS

- ▶ THERMOSTATIC VALVE - TSV
- ▶ ENGINE THROTTLE CONTROL
- RS (ONLY DL MODELS)

MOST FREQUENTLY USE

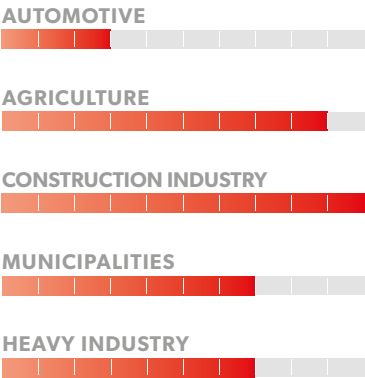

INNOVATIONS



SPECS



"L" VERSIONS ARE PROVIDED
WITH A GEARBOX IN ORDER
TO GUARANTEE PUMP
LIFESPAN EXTENSION



HYDRAULIC SPEED REDUCER
REDUCES ENGINE RPM WHEN
PUMP IS BY-PASS



FLEXIBLE COUPLING BETWEEN
PUMP AND ENGINE

TECHNICAL DATA

		BENZ-C H1811P P	BENZ-C H1809 A	BENZ-C H2515P P	BENZ-C H DL2515P P	BENZ-C L2216P P	BENZ-C L2021P P	BENZ-C L DL2217P P	BENZ-C L DL2021P P
Code		IDAF41151	IDAF41150	IDAF41152	IDAF41157	IDAF41153	IDAF41158	IDAF41154	IDAF41159
PERFORMANCE									
Operating pressure max	bar/Mpa	30-180/3-18	30-180/3-18	30-250/3-25	30-250/3-25	30-220/3-22	30-200/3-20	30-220/3-22	30-200/3-20
Flow rate	l/h	330-660	540	450-900	450-900	500-1000	400-1260	450-1000	450-1260
Max inlet water temperature	°C	50	50	50	50	50	50	50	50
Engine type		Honda GX200 (gasoline)	Honda GX200 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)
Engine power	Hp	6,5	6,5	13	13	13	13	13	13
Engine speed	rpm	3000	3000	3000	3000	1500	1500	1500	1500
Remote control		BYP	BYP	BYP	BYP	BYP	BYP	BYP	BYP
Pump/head/pistons		IPC plunger/ brass/ ceramic	Axial/brass/ ceramic	IPC plunger/ brass/ ceramic	IPC plunger/ brass/ ceramic	IPC plunger/ brass/ ceramic	IPC plunger/ brass/ ceramic	IPC plunger/ brass/ ceramic	IPC plunger/ brass/ ceramic
Detergent tank	l	-	-	-	-	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	86x56x54	86x56x54	105x66x75	105x66x75	105x66x75	105x66x75	105x66x75	105x66x75
Weight	Kg	49,5	49,8	66	78,2	84	79	85	71,6
Motor-pump coupling		direct	direct	direct	direct	gearbox	gearbox	gearbox	gearbox

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 M22



CODE: LCPR40013
**EXTENSION INOX P70 +
HYJET**



CODE: UGLN49990
**H.P. NOZZLE 1/4 25034
(FOR 1811/2515)**



CODE: UGLN05199
**H.P. NOZZLE 1/4 2505
(FOR 2216/2217)**



CODE: UGLN49995
**H.P. NOZZLE 1/4 25065
(FOR 2021)**



CODE: UGLN49988
**H.P. NOZZLE 1/4 25025 -
(FOR 1809)**



CODE: TBAP40256
H.P. HOSE R1 10 m 5/16"



OPTIONAL ACCESSORIES

CODE: RCIN10810
HOSE COUPLINGS M22



CODE: LCPR24906
**LANCE WITH DOUBLE
NOZZLE HOLDER**



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP23853
**DRAIN KIT 10 m
(FOR 1811/2013/1819)**



CODE: TBAP24406
**DRAIN KIT 20 m
(FOR 2216/2217/2021)**



CODE: LCPR93177
**TURBO LANCE TTR16
Ø1.30- (FOR 1809)**



CODE: LCPR40008
**TURBO LANCE P70 Ø035-
(FOR 1811/2515)**



CODE: LCPR40009
**TURBO LANCE P70 Ø035
(FOR 1811/2515)**



CODE: LCPR41973
**TURBO LANCE P70 Ø055
(FOR 2216/2217)**



CODE: LCPR88522
**TURBO LANCE P70 Ø065
(FOR 2021)**



CODE: KTRI40186
HOSE REEL KIT



CODE: LCPR24393
**SANDBLASTER KIT Ø1,3 mm
(FOR 1809)**



CODE: LCPR14858
**SANDBLASTER KIT Ø1,4 mm
(FOR 1811/2515)**



CODE: LCPR13557
**SANDBLASTER KIT Ø1,6 mm
(FOR 2216/2217)**



CODE: LCPR14860
**SANDBLASTER KIT Ø1,7 mm
(FOR 2021)**



CODE: TBAP40062
FLEXIBLE HOSE 15 m



CODE: TBAP44379
FLEXIBLE HOSE 20 m



CODE: LCPR40040
FOAMER HEAD KIT 1 l



CODE: LCLC49492
**LANCE FOR WASHING
FLOORS Ø,35
(FOR 1811/2013)**



CODE: LCLC49494
**LANCE FOR WASHING
FLOORS Ø,55
(FOR 2021)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI00038
INJECTOR KIT



DIESEL-C ELECTRIC STARTER

PRESSURE

200 bar

FLOW RATE

1000 l/h

ENGINE POWER

10 Hp




YANMAR SERIE DIESEL ENGINE

EXCLUSIVE CHARACTERISTICS

- ▶ THERMOSTATIC VALVE - TSV
- ▶ ENGINE THROTTLE CONTROL - RS

MOST FREQUENTLY USE

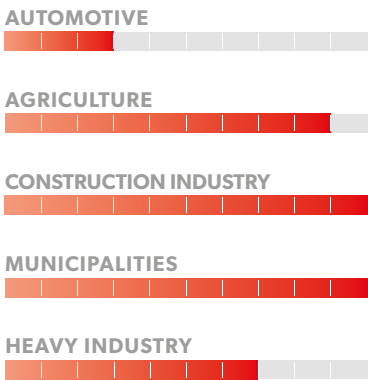

INNOVATIONS




SPECS



LARGE DIAMETER, WIDE TREAD TYRED WHEELS SUITABLE FOR ANY SURFACE



PROVIDED WITH A REDUCTION GEAR IN ORDER TO EXTEND PUMP LIFESPAN



EQUIPPED WITH ENGINE THROTTLE CONTROL IT REDUCES ENGINE RPM WHEN BY-PASS IS ACTIVATED

TECHNICAL DATA

Code		DIESEL-C L2017P D
PERFORMANCE		IDAF40794
Operating pressure max	bar/Mpa	30-200/3-20
Flow rate	l/h	630-1000
Max inlet water temperature	°C	50
Engine type		Yanmar L100N6 (diesel)
Engine power	Hp	10
Engine speed	rpm	1500
Remote control		BYP
Pump/head/pistons		IPC plunger/brass/ceramic
Detergent tank	l	-
Detergent delivery		low pressure
Dimension (LxWxH)	cm	105x66x75
Weight	Kg	120
Motor-pump coupling		gearbox + rpm control

STANDARD EQUIPMENT

CODE: IPPR40025 HANDGRIP G6000	CODE: LCPR40013 EXTENSION INOX P70 + HYJET	CODE: UGLN49987 H.P NOZZLE 1/4 15045	CODE: TBAP40256 HIGH PRESSURE HOSE 10 m
			

OPTIONAL ACCESSORIES

CODE: RCIN10810/RCIN40059 HOSE COUPLINGS M22	CODE: LCPR24906 LANCE WITH DOUBLE NOZZLE HOLDER	CODE: LCPR29360 MUDGUARD LANCE P90	CODE: TBAP23853 DRAIN KIT 10 m	CODE: TBAP24406 DRAIN KIT 20 m
				
CODE: TBAP40062 FLEXIBLE HOSE 15 m	CODE: TBAP44379 FLEXIBLE HOSE 20 m	CODE: KTRI40526 HOSE REEL KIT	CODE: LCPR40040 FOAM HEAD KIT 1 l	CODE: LCPR14859 SANDBLASTER KIT Ø 1,5
				
CODE: PRCH40041 SAND BAG 25 Kg	CODE: LCPR40054 TURBO LANCE TPR-255 Ø0,40	CODE: LCLC49494 LANCE FOR WASHING FLOORS Ø,55	CODE: KTRI40444 MAINTENANCE KIT 500H	CODE: KTRI40336 KIT FOR HOT WATER FEEDING VERSION
				

FIRE BOX

PRESSURE

175÷350
bar

FLOW RATE

1260
l/h

ABSORBED POWER


0,3
kW



EXCLUSIVE
CHARACTERISTICS

- ▶ BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

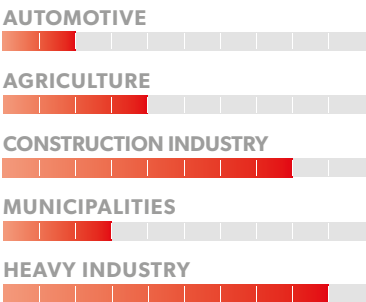

SPECS



SINGLE PHASE BURNER
MOTOR CONNECTED TO FAN
AND DIESEL FUEL PUMP



COVER AND TROLLEY IN
PAINTED SHEET METAL



ELECTRIC CONTROL PANEL
WITH ON-OFF SWITCH AND
THERMOSTAT

TECHNICAL DATA

Code		30M FIRE BOX	40M FIRE BOX	40/350 FIRE BOX
		CDVE49715	CDVE49716	CDVE40027
PERFORMANCE				
Operating pressure max	bar/Mpa	175/17,5	200/20	350/35
Flow rate	l/h	360-1260	360-1260	360-1260
Outlet water max temperature	°C	140	140	140
Power supply	Ph-V-Hz/A	1-230-50/2	1-230-50/2	1-230-50/2
Absorbed power	kW	0,3	0,3	0,3
Fuel tank	l	18	18	18
Fuel consumption max	kg/h	5,8	7,2	7,2
Boiler thermal power	kW	70	90	90
Dimension (LxWxH)	cm	120x70x100	120x70x100	120x70x100
Weight	kg	102,3	118,8	118,8

STANDARD EQUIPMENT

CODE: RCIN03755
HOSE COUPLINGS



CODE: TBAP29050
HIGH PRESSURE HOSE
L2310 R2 3/8F





HOT WATER

EXCLUSIVE TECHNOLOGIES 66

HOT LINE-H 68

MITHO-P EASY 70

MITHO-P VALUE 70

MITHO-P PLUS 72

ARGON-H 74

ARGON-H4 74

PW-H28/4 76

KOSMIC-H 78

GOLDEN - H VALUE 80

GOLDEN-H PREMIUM 82

HPS-H 84

MISTRAL - H VALUE 86

MISTRAL - H PREMIUM 88

PW-H100 P 90

MISTRAL - HT 92

MISTRAL - HT4 92

MISTRAL-H AUTOMATIC 94

SKID FUEGO-H 96

REMOTE CONTROLS

BY-PASS (BYP)	This system activates the machine's water recycling function when the trigger is released.
IMMEDIATE TOTAL STOP (ITS)	It instantly stops the machine when the trigger is released.
DELAYED TOTAL STOP (DTS)	It stops the machine 30" seconds after its last use.
DECELERATOR FOR REDUCTION OF ENGINE REVOLUTIONS (RS)	It reduces engine revolutions when the machine is in by-pass stage. It ensures longer life and reduce fuel consumption.

SAFETY DEVICES

INTELLIGENT PROPORTIONAL SWITCH OFF (IPSF)	This system allows the automatic stop of the machine after a period of inactivity, which varies according to how long the machine has been used.
MICRO LEAKAGE CONTROL (MLC)	The machine stops in case of dangerous leakage in the high pressure hydraulic circuit.
DRY RUNNING PROTECTION (DRP)	It stops the machine in case of lack of water.
THERMOSTATIC VALVE (TSV)	In case of prolonged By-Pass System operation, this system prevents water from overheating inside the high pressure pump.
LANCE NOZZLE CLOGGED CONTROL (NCC)	It stops the machine when the nozzle is clogged.
IGNITION BOILER DELAY (IBD)	Ensures low smoke emission levels when the boiler is started.
WORKING HOURS COUNTER (WHC)	It's an electronic hour counter that shows the working hours of the machine.
IPC TEMPERATURE STABILIZER (ATC)	It keeps the temperature of the boiler constant.
DIGITAL TEMPERATURE STABILIZER CONTROL (DTSC)	It's an extremely accurate electronic control device that ensures constant water temperature.
INFRARED FLAME CONTROL SYSTEM (FCS)	This system stops the machine in case of boiler malfunction.

CONTROLS

MAINTENANCE CHECK LED (MCL)	This control device allerts the operator when maintenance is required (maintenance is scheduled every 200 hrs).
MAINTENANCE CHECK LED / DISPLAY (MCLD)	Detailed maintenance information (LED + DISPLAY).
LIMESCALE/CORROSION PROTECTION UNIT (LCPU)	It protects hot-water machines against limescale and corrosion.
FUEL LEVEL CONTROL (FLC)	It detects and reports the lack of fuel.
ANTISCALE LEVEL CONTROL (ALC)	It detects and reports the lack of descaler and stops the machine burner to prevent limescale deposits.
FLOODING PREVENTION SYSTEM (FPS)	This system stops the machine after 60 minutes of continuous activity.
DIRECT INJECTION DETERGENT AND ANTI-SCALE CONTROLS (DIAD)	It reduces detergent expense mechanical vibrations and noise related to the traditional systems.
HIGH BRIGHTNESS LED SIGNALS (HBLS)	They are signal lamps to keep everything under control.
LED INDICATOR LIGHT REACHING DESIRED TEMPERATURE (TL)	It informs the operator when the water reaches the selected temperature.

EXCLUSIVE TECHNOLOGIES

	HOTLINE-H	ARGON-H ARGON-H4	PW - H28/4 PAINTED STEEL STRUCTURE	KOSMIC-H	PW - H100P STAINLESS STEEL	GOLDEN - H VALUE MISTRAL - H VALUE	GOLDEN - H PREMIUM	HPS-H	MISTRAL - H PREMIUM MISTRAL - H HT MISTRAL - H HT 4	MISTRAL-H AUTOMATIC	SKID FUEGO
											•
	•	•									
		•	•	•	•	•	•	•	•	•	
											•
				•		•	•		•	•	
			•	•	•	•	•	•	•	•	
			•	•	•	•	•		•	•	
											•
			•	•	•	•	•	•	•	•	
	•	•	•	•	•	•	•		•	•	•
				•	•	•	•		•	•	
		•	•	•		•					
					•		•		•	•	
					•				•	•	
				•	•	•	•		•	•	
				•		•			•	•	
					•						
				•		•			•	•	
						•					
							•		•	•	

Specifications, descriptions and pictures are indicative: rights to technical modifications reserved without prior notice.

PORTOTECNICA™

member of **IPC**

HIGH PRESSURE WASHERS - HOT WATER

HOT LINE-H

PRESSURE

140
bar

FLOW RATE

450
l/h

ABSORBED POWER

2,3÷2,5
kW



EXCLUSIVE CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS
- ▶ BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

DIY AND GARDENING



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN

SPECS



LARGE FRONT FOOT FOR
GREATER STABILITY



STURDY ERGONOMIC
HANDLE FOR AN EASY
MANOEUVRABILITY



4 LITRES DIESEL TANK MADE
OF TRANSPARENT PLASTIC, IN
ORDER TO ENSURE CONSTANT
MONITORING OF DIESEL LEVEL

TECHNICAL DATA

		WITHOUT HOSE REEL HOT LINE-H I1408AA M IDAC40485	WITH HOSE REEL HOT LINE-H I1408AO M IDAC40486
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	140/14	140/14
Flow rate	l/h	450	450
Outlet water temperature	°C	60	60
Power supply	Ph-V-Hz/A	1-230-50/9,7	1-230-50/11,2
Absorbed power	kW	2,3	2,5
Motor pole/rpm		2-2800	2-2800
Remote control		ITS	ITS
Pump/head/pistons		Axial/aluminium/inox	Axial/brass/inox
Boiler thermal power	kW	26	26
Fuel consumption	kg/h	1,9	1,9
Fuel tank	l	4	4
Detergent tank	l	-	-
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	68x48x75	68x48x75
Weight	kg	46	52,5

STANDARD EQUIPMENT

CODE: IPPR40017
HANDGRIP MV2009
(FOR I1207AA/I1408AA)



CODE: IPPR40025
HANDGRIP G6000
(FOR I1408AO)



CODE: LCPR40037
EXTENSION P50 ZINC
PLATED
(FOR I1207AA/1408AA)



CODE: LCPR40071
LANCE WITH MULTIREG
NOZZLE Ø 1,10
(FOR 1408AO)



CODE: UGLN49985
H.P NOZZLE 1/4 1503
(FOR 1207)



CODE: UGLN75421
H.P NOZZLE 1/4 15025
(FOR 1408AA)



CODE: TBAP28305
HIGH PRESSURE HOSE 8 m
(FOR I1207AA/I1408AA)



CODE: TBAP93872
HIGH PRESSURE HOSE 8 m
(FOR I1408AO)



CODE: LCPR40038
FOAMER M22
(FOR I1207AA/I1408AA)



CODE: LCPR40040
FOAMER M22 1 l
(FOR I1408AO)



CODE: LCPR40011
TURBO LANCE M22 D. 1,15
(FOR 1408AO)



OPTIONAL ACCESSORIES

CODE: SPID24911
ROTATING HYDROBRUSH
LANCE



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCPR14857
SANDBLASTER KIT D.1,2
(FOR 1408)



CODE: PRCH40041
SAND BAG 25 Kg



MITHO-P EASY

MITHO-P VALUE

PRESSURE

140÷160
bar

FLOW RATE

300÷600
l/h

ABSORBED POWER

2,5÷3,3
kW



EXCLUSIVE CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS
- ▶ IGNITION BOILER DELAY - IBD
- ▶ IPC TEMPERATURE STABILIZER - ATC

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



HARDWARE COSTUMER



HO.RE.CA.



DIY AND GARDENING



LIGHT INDUSTRIES



INNOVATIONS



MODERN
MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER

SPECS



HOOK TO REEL ELECTRICAL
CABLE



LARGE DIAMETER WHEELS FOR
EASY MANEUVERABILITY



EASE OF MACHINE LIFTING
THANKS TO FOOT SUPPORT

TECHNICAL DATA

		MITHO-P I1408A EASY IDAC41612	MITHO-P I1408P VALUE IDAC41613	MITHO-P I1611P VALUE IDAC41614
Code				
PERFORMANCE				
Operating pressure	bar/Mpa	140/14	140/14	160/16
Flow rate	l/h	480	300-480	300-600
Outlet water temperature	°C	max 110°C	max 110°C	max 110°C
Power supply	Ph-V-Hz	1-230-50/12,1	1-230-50/11,2	3-400-50/7,8
Absorbed power	kW	2,7	2,5	3,3
Motor pole/rpm		2-2800	2-2800	2-2800
Remote control		ITS	ITS	ITS
Pump/head/pistons		whobble plate /brass /stainless steel	IPC conrod /brass /ceramic coated	IPC conrod /brass /ceramic coated
Boiler thermal power	kW	34	34	39
Fuel consumption	kg/h	2,8	2,8	3,1
Fuel tank	l	20	20	20
Detergent tank	l	-	-	-
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	80x61x85	80x61x85	80x61x85
Weight	kg	66,2	68,1	80

STANDARD EQUIPMENT

CODE: IPPR40032
**HANDGRIP B106 +EXT
L.270 +M22 M
(FOR 1408 MODELS)**



CODE: LCPR40218
**LANCE WITH MULTIREG
NOZZLE 035 W
(FOR 1408A MODELS)**



CODE: LCPR40220
**LANCE WITH MULTIREG
NOZZLE 030J
(FOR MODEL 1408P)**



CODE: TBAP40318
**HP HOSE 1/ 4 8 m C/2 IRV-
M22 (FOR 1408 MODELS)**



CODE: IPPR40017
**HANDGRIP MV2009 -
(FOR 1611 MODEL)**



CODE: TBAP28305
**HP HOSE 1/ 4 8 m C/2 IRV-
M22 (FOR 1611 MODEL)**



CODE: LCPR40223
**EXTENSION P 220 - I.JET2
040 BL (FOR MODEL 1611)**



OPTIONAL ACCESSORIES

CODE: SPID24911
**ROTATING HYDRO BRUSH
LANCE**



CODE: SPID24939
HYDRO BRUSH LANCE P70



CODE: TBAP23853
**SEWER CLEANING HOSE
10M - M22**



CODE: LCPR24943
SANDBLASTER KIT D.1,3



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40040
FOAMER M22 1 l -



CODE: LCPR40203
**TURBO LANCE TTR-
16+SF230 207B M22 1,15
(FOR 1408)**



CODE: LCPR40221
**TURBO LANCE TPR-
255+SF230 255B M22
035 - (FOR 1408)**



CODE: KTRI29377
WATER FEEDING KIT



CODE: KTRI29366
MUD SUCKERS



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: KTRI40693
KIT HOSEREEL



CODE: LCLC49492
FLOOR LANCE D.0,35



CODE: LCLC49493
**FLOOR LANCE D.0,45 (MOD.
1611)**



MITHO-P PLUS

PRESSURE

145÷160
bar

FLOW RATE

550÷660
l/h

ABSORBED POWER

2,8÷3,3
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTERS - WHC
- ▶ FUEL LEVEL CHECK - FLC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ HIGH-BRIGHTNESS WARNING LIGHTS-HBLS
- ▶ IPC TEMPERATURE STABILIZER - ATC
- ▶ SERVICE WARNING LIGHT -MLC



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



HARDWARE COSTUMER



HO.RE.CA.



DIY AND GARDENING



LIGHT INDUSTRIES



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL



MODERN
MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER

SPECS



HOOK TO REEL ELECTRICAL
CABLE



LARGE DIAMETER WHEELS
IN ORDER TO FACILITATE
MOVEMENTS



EASE OF MACHINE LIFTING
THANKS TO FOOT SUPPORT

TECHNICAL DATA

		MITHO-PH PD1509P M	MITHO-PH PD1611P T
Code		IDAC41615	IDAC41616
PERFORMANCE			
Operating pressure	bar/Mpa	30-150/3-15	30-160/3-16
Flow rate	l/h	300-540	300-600
Outlet water temperature	°C	30°-max 110°C	30°-max 110°C
Power supply	Ph-V-Hz	1-230-50/12,8	3-400-50/7,8
Absorbed power	kW	2,8	3,3
Motor pole/rpm		2-2800	2-2800
Remote control		DTS	DTS
Pump/head/pistons		IPC conrod /brass /ceramic coated	IPC conrod /brass /ceramic coated
Boiler thermal power	kW	37	38,5
Fuel consumption	kg/h	3,02	3,2
Fuel tank	l	20	20
Detergent tank	l	-	-
Detergent delivery		bassa pressione	bassa pressione
Dimension (LxWxH)	cm	80x61x85	80x61x85
Weight	kg	81	80

STANDARD EQUIPMENT

CODE: IPPR40017
HANDGRIP MV2009 -



CODE: LCPR40220
LANCE WITH MULTIREG
NOZZLE 030
(FOR 1509 MODEL)



CODE: LCPR40223
EXTENSION P 220 - I.JET2
040 BL (FOR 1611 MODEL)



CODE: TBAP28305
HP HOSE 1/ 4 8 m C/2
IRV- M22



OPTIONAL ACCESSORIES

CODE: SPID24911
ROTATING HYDRO BRUSH
LANCE



CODE: SPID24939
FIXED HYDRO BRUSH
LANCE



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCPR24943
SANDBLASTER KIT D.1,3



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40040
FOAMER M22 1 l -



CODE: LCPR40054
TURBO LANCE TPR-255
Ø0,40 (FOR 1611 MODEL)



CODE: LCPR40203
TURBO LANCE TPR255B
M22 Ø30 -
(MOD. 1509 PLUS)



CODE: KTRI29377
FEEDING KIT



CODE: KTRI29366
PLUNGED EJECTOR DEVICE



CODE: RCIN10810 /RCIN40059
HOSE COUPLING M22



CODE: LCLC49492
FLOOR LANCE Ø,35
(MOD. 1509 PLUS)



CODE: LCLC49493
FLOOR LANCE Ø,45
(MOD. 1611 PLUS)



CODE: KTRI40693
KIT HOSEREEL



member of **IPC**

ARGON-H (3 WHEELS)
ARGON-H4 (4 WHEELS)

PRESSURE	FLOW RATE	ABSORBED POWER
130 bar	500 l/h	2,7 kW

EXCLUSIVE
CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS ("I" MODELS)
- ▶ BOILER IGNITION DELAY - IBD
- ▶ IPC TEMPERATURE STABILIZER - ATC




ARGON-H4

ARGON-H

The I1308A model without pressure adjustment

MOST FREQUENTLY USE

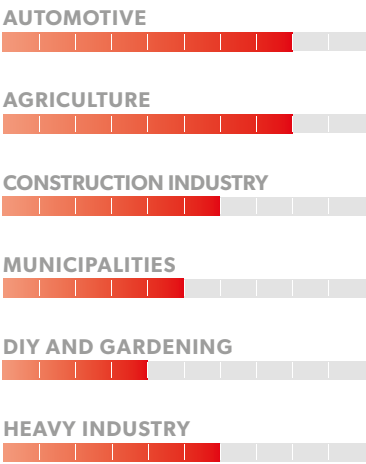

INNOVATIONS

 IPC'S EXCLUSIVE BOILER

 IPC PUMP

 MODERN MODULAR BUILD-UP

 ALL TERRAIN

SPECS



LARGE DIAMETER WHEELS IN ORDER TO FACILITATE MOVEMENTS



ACCESSORY STORAGE COMPARTMENT



STURDY AND LARGE TANK IN ROTOMOULDED PLASTIC MATERIAL

TECHNICAL DATA

3 WHEELS

Code

4 WHEELS

Code

PERFORMANCE

Operating pressure	bar/Mpa	130/13
Flow rate	l/h	500
Outlet water temperature	°C	30-110
Power supply	Ph-V-Hz/A	1-230-50/12,3
Absorbed power	kW	2,7
Motor pole/rpm		2-2800
Remote control		ITS
Pump/head/pistons		Axial/brass/ceramic
Boiler thermal power	kW	37,8
Fuel consumption	kg/h	3,2
Fuel tank	l	18
Detergent tank	l	-
Dimension (LxWxH)	cm	82x63x87
Weight	kg	75

IMMEDIATE TOTAL STOP

ARGON-H I1308A M

IDAC40806

ARGON-H4 I1308A M

IDAC40809

STANDARD EQUIPMENT

CODE: IPPR40017
HANDGRIP MV2009
(FOR 1308)



CODE: LCPR40037
EXTENSION P50 ZINC
PLATED



CODE: UGLN11196
H.P. NOZZLE 1/4 15035
(FOR 1308)



CODE: TBAP28305
HIGH PRESSURE HOSE 8 m



OPTIONAL ACCESSORIES

CODE: LCLC49492
LANCE FOR WASHING
FLOORS Ø 0,35



CODE: SPID24939
FIXED HYDROBRUSH LANCE



CODE: KTRI40303
HOSE REEL KIT



CODE: LCPR40040
FOAMER KIT 1 l



CODE: RCIN10810 /RCIN40059
HOSE COUPLING M22



CODE: KTRI29377
FEEDING KIT



CODE: TBAP23853
DRAIN KIT 10 m



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: LCPR40104
EXTENSION P70 + TPR255
Ø0,35 (FOR 1308)



CODE: PRCH40041
SAND BAG 25 Kg



PW-H28/4

STAINLESS STEEL SERIES

PRESSURE

130 ÷ 170
bar

FLOW RATE

600 ÷ 800
l/h

ABSORBED POWER

2,7 ÷ 4,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ BOILER IGNITION DELAY - IBD
- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ IPC TEMPERATURE STABILIZER - ATC



WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



IPC'S
EXCLUSIVE
BOILER



IPC
PUMP



MODERN
MODULAR
BUILD-UP



ALL
TERRAIN



MODERN
MODULAR
BUILD-UP

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND
EASY TRANSPORT



STAINLESS STEEL COVER



LANCE HOLDER WITH
LOCKING SYSTEM

TECHNICAL DATA

		PW-H28/4 D1310P4 M	PW-H28/4 D1713PT
Code		IDAC41124	IDAC41125
PERFORMANCE			
Operating pressure	bar/Mpa	40-130/4-13	40-170/4-17
Flow rate	l/h	280-600	400-800
Outlet water temperature	°C	30-130	30-130
Power supply	Ph-V-Hz/A	1-230-50/12,3	3-400-50/9,1
Absorbed power	kW	2,7	4,7
Motor pole/rpm		4-1400	2-2800
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	37,8	37,8
Fuel consumption	kg/h	3,2	3,2
Fuel tank	l	18	18
Detergent tank	l	-	-
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	82x63x87	82x63x87
Weight	kg	102,4	110,2

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP28305
H.P. HOSE 8 m



CODE: UGLN49986
H.P. NOZZLE 1/4 1504



OPTIONAL ACCESSORIES

CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: LCPR40040
FOAMER KIT 1l



CODE: KTRI40303
HOSE REEL KIT



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: KTRI29377
FEEDING KIT



CODE: TBAP23853
DRAIN KIT 10 m



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø0,4



CODE: LCPR14858
SANDBLASTER KIT Ø1,4



CODE: PRCH40041
SAND BAG 25 kg



CODE: LCLC49492
LANCE FOR WASHING
FLOORS Ø 0,35



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP39120
NO-MARKING HIGH
PRESSURE HOSE 10 m



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: KTRI40316
MAINTENANCE KIT 500H -
(FOR 1310)



CODE: KTRI40307
MAINTENANCE KIT 500H -
(FOR 1713)



member of **IPC**

KOSMIC-H (3 WHEELS)
KOSMIC-H (4 WHEELS)

PRESSURE	FLOW RATE	ABSORBED POWER
130 ÷ 170 bar	500 ÷ 800 l/h	2,7 ÷ 4,3 kW

EXCLUSIVE
CHARACTERISTICS


- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ IPC TEMPERATURE STABILIZER - ATC



KOSMIC-H
(3 WHEELS)

KOSMIC-H
(4 WHEELS)

MOST FREQUENTLY USE

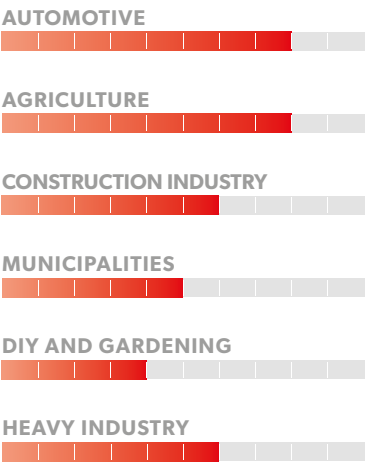

INNOVATIONS

AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS

IPC'S
EXCLUSIVE
BOILER

ALL
TERRAIN

MODERN
MODULAR
BUILD UP

IPC
PUMP

SPECS

CONTROL PANEL WITH
INDICATOR LAMPS

USER FRIENDLY ACCESS TO
ADJUSTMENT

STURDY AND LARGE TANK
AND ACCESSORIES STORAGE

TECHNICAL DATA

3 WHEELS

Code	KOSMIC-H D1309P M	KOSMIC-H D1310P4 M	KOSMIC-H D1509P4 M	KOSMIC-H D1708P4 M	KOSMIC-H D1713P T
	IDAC41419	IDAC41420	IDAC41421	IDAC41422	IDAC41423

4 WHEELS

Code	KOSMIC-H4 D1309P M	KOSMIC-H4 D1310P4 M	KOSMIC-H4 D1509P4 M	KOSMIC-H4 D1708P4 M	KOSMIC-H4 D1713P T
	IDAC41424	IDAC41425	IDAC41426	IDAC41427	IDAC41428

PERFORMANCE

Operating pressure	bar/Mpa	130/13	30-130/3-13	30-150/3-15	30-170/4-17	30-170/3-17
Flow rate	l/h	280-540	300-600	300-540	300-500	400-800
Outlet water temperature	°C	30-110	30-110	30-110	30-110	30-110
Power supply	Ph-V-Hz/A	1-230-50/12,9	1-230-50/12,6	1-230-50/12,1	1-230-50/12,9	3-400-50/8,8
Absorbed power	kW	2,8	2,8	2,7	2,8	4,3
Motor pole/rpm		2-2800	4-1400	4-1400	4-1400	2-2800
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	37,8	37,8	37,8	37,8	37,8
Fuel consumption	Kg/h	3,2	3,2	3,2	3,2	3,2
Fuel tank	l	18	18	18	18	18
Detergent tank	l	-	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	m	82x63x87	82x63x87	82x63x87	82x63x87	82x63x87
Weight	Kg	80	80	80	80	90

STANDARD EQUIPMENT

CODE: IPPR40031
**HANDGRIP G4000
CERAMIC TECH**



CODE: LCPR40013
**EXTENSION P50 ZINC
PLATED**



CODE: UGLN40000
**H.P. NOZZLE 1/4 15034 -
(FOR 1309)**



CODE: UGLN49986
**H.P. NOZZLE 1/4 1503 -
(FOR 1309/1509)**



CODE: UGLN49985
**H.P. NOZZLE 1/4 1504 -
(FOR 1310/1713/1714)**



CODE: UGLN75421
**H.P. NOZZLE 1/4 15025 -
(FOR 1708)**



CODE: TBAP40308
**HIGH PRESSURE HOSE
10 m**



OPTIONAL ACCESSORIES

CODE: LCLC49492
**LANCE FOR WASHING
FLOORS Ø 0,35**



CODE: SPID24939
FIXED HYDROBRUSH LANCE



CODE: KTRI40303
HOSE REEL KIT



CODE: LCPR40040
FOAMER KIT 1 l



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: KTRI29377
FEEDING KIT



CODE: TBAP23853
DRAIN KIT 10 m



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: LCPR40103
**EXTENSION P70 + TPR255
Ø 0,4 - (FOR 1713)**



CODE: LCPR40104
**EXTENSION P70 + TPR255
Ø 0,35 (FOR 1309)**



CODE: LCPR40214
**EXTENSION P70 + TPR255
Ø 0,30 - (FOR 1708)**



CODE: LCPR24943
**SANDBLASTER KIT Ø 1,3 mm
(FOR 1309/1509/1708)**



CODE: LCPR14858
**SANDBLASTER KIT Ø 1,4 mm
(FOR 1310/1713)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI40306
**MAINTENANCE KIT 500H
(FOR 1309)**



CODE: KTRI40316
**MAINTENANCE KIT 500H -
(FOR 1310)**



CODE: KTRI40307
**MAINTENANCE KIT 500H
(FOR 1713)**



CODE: KTRI40652
**MAINTENANCE KIT 500H -
(FOR 1714)**



CODE: KTRI40639
**MAINTENANCE KIT 500H -
(FOR 1509)**



CODE: KTRI40640
**MAINTENANCE KIT 500H -
(FOR 1708)**



GOLDEN - H VALUE (3 WHEELS)

GOLDEN - H VALUE (4 WHEELS)

PRESSURE

150÷200
bar

FLOW RATE

800÷1150
l/h

ABSORBED POWER

5÷6,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ BOILER IGNITION DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ IPC TEMPERATURE STABILIZER - ATC
- ▶ MAINTENANCE CHECK LED - MCL
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU



GOLDEN-H
(3 WHEELS)

GOLDEN-H
(4 WHEELS)

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



ALL
TERRAIN



DIAD
DIRECT INJECTION
DETERGENT AND
ANTI-SCALE



MODERN
MODULAR
BUILD UP



IPC
PUMP



IPC'S
EXCLUSIVE
BOILER



G6000™
CERAMIC
HIGH-TECH GUN

SPECS



CONTROL PANEL WITH
INDICATOR LAMPS



USER FRIENDLY ACCESS TO
ADJUSTMENT AND LIQUID
REFILLING



NEW AND MORE RESISTANT
PLASTIC

TECHNICAL DATA

3 WHEELS

Code IDAC41430 IDAC41431 IDAC41429 IDAC41433 IDAC41432

4 WHEELS

Code IDAC41435 IDAC41436 IDAC41434 IDAC41438 IDAC41437

PERFORMANCE

Operating pressure	bar/Mpa	30-180/3-18	30-190/3-19	30-150/3-19	30-170/3-17	30-200/3-20
Flow rate	l/h	450-800	450-900	500-1000	600-1150	500-1000
Outlet water temperature	°C	30-110	30-110	30-110	30-110	30-110
Power supply	Ph-V-Hz/A	3-400-50/9,8	3-400-50/10,3	3-400-50/10	3-400-50/13	3-400-50/13,6
Absorbed power	kW	5	5	5	6,4	6,4
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	70	70	70	≥70	≥70
Fuel consumption	kg/h	5,8	5,8	5,8	7,38	7,38
Fuel tank	l	25	25	25	25	25
Detergent tank	l	22	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90	110x70x90
Weight	kg	126,6	125	130,6	144,8	146,2

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 1813)



CODE: UGLN02294
H.P. NOZZLE 1/4
UG.15055 - (FOR 1517)



CODE: UGLN49996
H.P. NOZZLE 1/4 UG.2507 -
(FOR 1719)



CODE: UGLN49994
H.P. NOZZLE 1/4 2506
(FOR 1719)



CODE: -
ANTI-SCALE TREATMENT
M421 1 Kg



CODE: TBAP40308
HIGH PRESSURE HOSE 10 m
(FOR 1813/1915)



CODE: TBAP40309
HIGH PRESSURE HOSE 10 m
(FOR 1517/1719/2017)



OPTIONAL ACCESSORIES

CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCLC49492
LANCE FOR WASHING
FLOORS Ø 0,35 - (FOR 1915)



CODE: LCLC49494
LANCE FOR WASHING
FLOORS Ø 0,55 (FOR 1719)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS Ø 0,45 (FOR
1813/1517/2017)



CODE: KTRI40235
HOSE REEL KIT



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: TBAP23853
DRAIN KIT 10 m



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: TBAP24406
DRAIN KIT 20M - M22



CODE:
LCPR40182 EXTENSION P70 + TPR255 Ø 0,55 - (FOR 1517)
LCPR40135 EXTENSION P70 + TPR255 Ø 0,45 - (FOR 1915/2017)
LCPR88522 EXTENSION P70 + TPR255 Ø 0,65 - (FOR 1719)
LCPR40104 EXTENSION P70 + TPR255 Ø 0,35 - (FOR 1813)




CODE: PRCH40041
SAND BAG 25 Kg



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X 6



CODE:
LCPR14861 SANDBLASTER KIT Ø2,0 (FOR MOD. 1719)
LCPR13557 SANDBLASTER KIT Ø1,6 (FOR MOD.1517)
LCPR14859 SANDBLASTER KIT Ø1,5 - (FOR 1517/1915/2017)
LCPR14858 SANDBLASTER KIT Ø1,4 - (FOR 1813)



CODE:
KTRI40642 MAINTENANCE KIT 500H (MOD.1813)
KTRI40643 MAINTENANCE KIT 500H (MOD.1915)
KTRI40644 MAINTENANCE KIT 500H (MOD. 1517)
KTRI40645 MAINTENANCE KIT 500H (MOD. 1719)
KTRI40646 MAINTENANCE KIT 500H (MOD.2017)



GOLDEN-H PREMIUM (3 WHEELS)

GOLDEN - H PREMIUM (4 WHEELS)

PRESSURE

150÷200
bar

FLOW RATE

800÷1150
l/h

ABSORBED POWER

5÷6,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ DIGITAL TEMPERATURE STABILIZER CONTROL - DTSC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ MAINTENANCE CHECK LED - MCL
- ▶ LED INDICATOR LIGHT REACHING TEMPERATURE - TL



GOLDEN-H PREMIUM
(3 WHEELS)

GOLDEN-H PREMIUM
(4 WHEELS)

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



DIAD
DIRECT INJECTION
DETERGENT AND
ANTI-SCALE



CIRCULAR
DESIGN
& OPERATION



DIGITAL
DISPLAY
DD



IPC
PUMP



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP



IPC'S
EXCLUSIVE
BOILER

SPECS



CONTROL PANEL WITH
INDICATOR LAMPS AND
DISPLAY



USER FRIENDLY ACCESS TO
ADJUSTMENT AND LIQUID
REFILLING



NEW AND MORE RESISTANT
PLASTIC

TECHNICAL DATA

3 WHEELS

Code **GOLDEN-H PD1813P T** **GOLDEN-H PD1915P T** **GOLDEN-H PD1517P T** **GOLDEN-H PD1719P T** **GOLDEN-H PD2017P T**

Code IDAC41440 IDAC41441 IDAC41439 IDAC41443 IDAC41442

4 WHEELS

Code **GOLDEN-H4 PD1813P T** **GOLDEN-H4 PD1915P T** **GOLDEN-H4 PD1517P T** **GOLDEN-H4 PD1719P T** **GOLDEN-H4 PD2017P T**

Code IDAC41445 IDAC41446 IDAC41444 IDAC41448 IDAC41447

PERFORMANCE

Operating pressure	bar/Mpa	30-180/3-18	30-190/3-19	30-150/3-19	30-170/3-17	30-200/3-20
Flow rate	l/h	450-800	450-900	500-1000	600-1150	500-1000
Outlet water temperature	°C	30-140	30-140	30-140	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/9,7	3-400-50/10,6	3-400-50/10,6	3-400-50/13,2	3-400-50/13,2
Absorbed power	kW	5	5	5	6,4	6,4
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	70	70	70	≥70	≥70
Fuel consumption	kg/h	5,8	5,8	5,8	5,8	5,8
Fuel tank	l	25	25	25	25	25
Detergent tank	l	22	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90	110x70x90
Weight	kg	120	122	122	140	140

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 1813)



CODE: UGLN05200
H.P. NOZZLE 1/4 1505
(FOR 1517)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915/2017)



CODE: UGLN49994
H.P. NOZZLE 1/4 UG.2506
(FOR 1719)



CODE: -
ANTI-SCALE TREATMENT
M421 1 Kg



CODE: TBAP40308
HIGH PRESSURE HOSE 10 m
(FOR 1813/1915)



CODE: TBAP40309
HIGH PRESSURE HOSE 10 m
(FOR 1517/1719/2017)



OPTIONAL ACCESSORIES

CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCLC49492
LANCE FOR WASHING
FLOORS Ø 0,35 (FOR 1915)



CODE: LCLC49494
LANCE FOR WASHING
FLOORS Ø 0,55
(FOR 1719)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS Ø 0,45 (FOR
1813/1517/2017)



CODE: KTRI40235
HOSE REEL KIT



CODE: RCIN10810
HOSE COUPLING M22



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCPR40104
EXTENSION P70 + TPR255
Ø0,35 (FOR 1813)



CODE: LCPR40135
EXTENSION P70 + TPR255
Ø0,45 - (FOR 1915/2017)



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 1915/2017/1517)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 1813)



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 mm
(FOR 1719)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X 6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40314
MAINTENANCE KIT 500H
(FOR 1813/1915)



CODE: KTRI40431
MAINTENANCE KIT 500H
(FOR 2017)



HPS-H

PRESSURE

150÷190
bar

FLOW RATE

1300
l/h

ABSORBED POWER

7,1÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



IPC'S
EXCLUSIVE
BOILER



IPC
PUMP



M421
ANTI-SCALE



G6000™
CERAMIC
HIGH-TECH GUN

SPECS



CONNECTION BETWEEN PUMP AND MOTOR IS PROVIDED WITH FLEXIBLE COUPLING



ELECTRIC PANEL IS PROVIDED WITH A TRANSPARENT COVER IN ORDER TO PROTECT IT FROM SPLASHES AND DIRT



ERGONOMIC HANDLE FOR AN EASY TRANSPORT

TECHNICAL DATA

		WITHOUT HOSE REEL	
		HPS-H D1521P4 T	HPS-H D1921P4 T
Code		IDAC40444	IDAC40445
PERFORMANCE			
Operating pressure	bar/Mpa	30-150/3-15	30-190/3-19
Flow rate	l/h	650-1300	650-1300
Outlet water temperature	°C	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/13	3-400-50/16
Absorbed power	kW	7,1	8,5
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	85,5	85,5
Fuel consumption	kg/h	7,6	7,6
Fuel tank	l	30	30
Detergent tank	l	16	16
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	131x77x95	131x77x95
Weight	kg	175	182

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40160
EXTENSION PD70 INOX 0°



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1521 - 2PZ)



CODE: UGLN49996
H.P. NOZZLE 1/4 2507
(FOR 1921- 2PZ)



CODE: TBAP40009
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: LCPR29363
STEAM LANCE - P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS



CODE: RCIN10810
HOSE COUPLING M22



CODE: LCPR14860
SANDBLASTER KIT Ø1,7 mm
(FOR 1921)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40088
EXTENSION P70 -
TURBO 0.80



CODE: TBAP24406
DRAIN KIT 20 m



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X 6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40433
MAINTENANCE KIT 500H



member of **IPC**

MISTRAL - H VALUE (3 WHEELS)

MISTRAL - H VALUE (4 WHEELS)

PRESSURE

200÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

7,7÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ IPC TEMPERATURE STABILIZER - ATC
- ▶ MAINTENANCE CHECK LED - MCL



MISTRAL-H VALUE
(4 WHEELS)

MISTRAL-H VALUE
(3 WHEELS)

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



ALL
TERRAIN



DIAD
DIRECT INJECTION
DETERGENT AND
ANTI-SCALE



MODERN
MODULAR
BUILD UP



CIRCULAR
DESIGN
& OPERATION



IPC'S
EXCLUSIVE
BOILER



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP

SPECS



CONTROL PANEL WITH
INDICATOR LAMPS



USER FRIENDLY ACCESS TO
ADJUSTMENT AND LIQUID
REFILLING



NEW AND MORE RESISTANT
PLASTIC

TECHNICAL DATA

3 WHEELS

Code

MISTRAL-H D2021P T

IDAC41450

MISTRAL-H D2515P T

IDAC41451

4 WHEELS

Code

MISTRAL-H4 D2021P T

IDAC41453

MISTRAL-H4 D2515P T

IDAC41454

PERFORMANCE

Operating pressure	bar/Mpa	30-200/3-20	30-250/3-25
Flow rate	l/h	650-1300	450-900
Outlet water temperature	°C	30-110	30-110
Power supply	Ph-V-Hz/A	3-400-50/16,6	3-400-50/16
Absorbed power	kW	8,5	7,7
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	≤100	≥70
Fuel consumption	kg/h	7,4	5,8
Fuel tank	l	25	25
Detergent tank	l	22	22
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90
Weight	kg	172	172

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: TBAP40256
HIGH PRESSURE HOSE 10 m
(FOR 2021)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m
(FOR 2515)



CODE: -
ANTI-SCALE TREATMENT
M421 1 Kg



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70




CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70




CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 2021)



CODE: LCPR14858
SANDBLASTER KIT Ø1,4 mm
(FOR 2515)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 2021)



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø0,4 (FOR 2515)



CODE: LCPR40171
EXTENSION P70 + R.J.255
Ø0,65 (FOR 2021)



CODE: LCPR29363
STEAM LANCE - P70



CODE: KTRI40341
HOOSE REEL KIT



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40434
MAINTENANCE KIT 500H
(FOR 2021)



CODE: KTRI40435
MAINTENANCE KIT 500H
(FOR 2515)



MISTRAL - H PREMIUM

PRESSURE

200÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

7,7÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ DIGITAL TEMPERATURE STABILIZER CONTROL - DTSC
- ▶ MAINTENANCE CHECK LED - MCL
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ LED INDICATOR LIGHT REACHING TEMPERATURE TL



MISTRAL-H PREMIUM
(4 WHEELS)

MISTRAL-H PREMIUM
(3 WHEELS)

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



DIAD
DIRECT INJECTION
DETERGENT AND
ANTI-SCALE



DIGITAL
DISPLAY
DD



IPC
PUMP



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP



IPC'S
EXCLUSIVE
BOILER

SPECS



CONTROL PANEL WITH
INDICATOR LAMPS AND
DISPLAY



BOILER CAN BE OPENED
FROM THE TOP FOR AN EASY
CLEANING



EASILY ACCESSIBLE
ANTISCALE TANK

TECHNICAL DATA

3 wheels

Code

4 wheels

Code

PERFORMANCE

		MISTRAL-H PD2021P T IDAC41460	MISTRAL-H PD2515P T IDAC41461
		MISTRAL-H4 PD2021 T IDAC41464	MISTRAL-H4 PD2515 T IDAC41465
Operating pressure	bar/Mpa	30-200	30-250/3-25
Flow rate	l/h	650-1300	450-900
Outlet water temperature	°C	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/15,3	3-400-50/15,3
Absorbed power	kW	8,2	8,2
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	≤100	≥70
Fuel consumption	kg/h	7,7	7,38
Fuel tank	l	25	25
Detergent tank	l	22	22
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90
Weight	kg	169	169

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN49986
H.P. NOZZLE 1/4 1504 (FOR 2515)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065 (FOR 2021)



CODE: TBAP40256
HIGH PRESSURE HOSE 10 m (FOR 2021)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m (FOR 2515)



CODE: -
ANTI-SCALE TREATMENT M421 1 Kg



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH LANCE P70



CODE: LCLC41140
LANCE FOR WASHING FLOORS INOX



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm (FOR 2021)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm (FOR 2515)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: TBAP24406
DRAIN KIT 20 m (FOR 2021)



CODE: LCPR40103
EXTENSION P70 + TPR255 Ø0,4 (FOR 2515)



CODE: LCPR40171
EXTENSION P70 + R.J.255 Ø0,65 (FOR 2021)



CODE: LCPR29363
STEAM LANCE - P70



CODE: KTRI40341
HOSE REEL KIT



CODE: PRCH40039
ANTI-SCALE TREATMENT M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT M421 10 Kg



CODE: KTRI40434
MAINTENANCE KIT 500H (FOR 2021)



CODE: KTRI40435
MAINTENANCE KIT 500H (FOR 2515)



CODE: KTRI40669
HOSE REEL KIT ON-BOARD MACHINE



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



PW-H100 P

STAINLESS STEEL SERIES

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

5÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ DIGITAL TEMPERATURE STABILIZER CONTROL - DTSC
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL



WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP



IPC'S
EXCLUSIVE
BOILER



IPC
PUMP



M421
ANTI-SCALE

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND EASE
TRANSPORT



STAINLESS STEEL COVER



HANDLE AND TANKS IN PLASTIC
MATERIAL

TECHNICAL DATA

(WITH NO-MARKING RUBBER WHEELS / 3 WHEELS)

Code		PW-H100P D2017P4 T	PW-H100P D1721P4 T	PW-H100/4 P D2021P4 T	PW-H100/4 P D2515P4 T
		IDAC41127	IDAC41128	IDAC41129	IDAC41130
PERFORMANCE					
Operating pressure	bar/Mpa	30-200/3-20	30-170/3-17	30-200/3-20	30-250/3-25
Flow rate	l/h	500-1000	650-1300	650-1300	450-900
Outlet water temperature	°C	30-140	30-140	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/13	3-400-50/14,6	3-400-50/16,6	3-400-50/16
Absorbed power	kW	6,5	7,9	8,4	7,7
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	≥70	≤100	≤100	≥70
Fuel consumption	Kg/h	5,7	7,7	7,7	5,7
Fuel tank	l	25	25	25	25
Detergent tank	l	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90
Weight	Kg	168,60	177	186,60	144

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 1721/2021/2515)



CODE: LCPR40087
EXTENSION P70
INOX(FOR 1915/2017)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915/2017)



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1721)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: TBAP40009
H.P. HOSE 10 m R2 5/16"
(FOR 1721/2021/2515)



CODE: TBAP25324
H.P. HOSE R1 10M 5/16" -
(FOR2017)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: SPID24939
FIXED HYDRO BRUSH
LANCE



CODE: LCLC41140
LANCE FOR WASHING
FLOORS



CODE: LCPR29363
STEAM LANCE P70



CODE: LCPR14858
SANDBLASTER KIT D. 1,4
(FOR 2515)



CODE: LCPR14859
SANDBLASTER KIT D. 1,5
(FOR 1915/2017)



CODE: LCPR14860
SANDBLASTER KIT D. 1,7
(FOR 2021)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP23853
DRAIN KIT 10 m - (FOR 2017)



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1721/2021)



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: TBAP39120
NON-MARKING H.P. HOSE
R1 10 m 5/16"
(FOR 1915/2017/1721)



CODE: TBAP39121
NON-MARKING H.P. HOSE
R2 10 m 5/16"
(FOR 2021P4/2515P4)



CODE: TBAP39122
NON-MARKING H.P. HOSE
R1 20 m 5/16"
(FOR 1915/2017/1721)



CODE: TBAP39123
NON-MARKING H.P. HOSE
R2 20 m 5/16"
(FOR 2021P4/2515P4)



CODE: LCPR40135
EXTENSION P70 + TPR255
Ø0,45 - (FOR 1915/2017)



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø0,4 - (FOR 2515)



CODE: LCPR40171
EXTENSION P70 + R.J. 255
Ø0,65 - (FOR 2021)



CODE: LCPR40170
EXTENSION P70 + R.J. 255
Ø0,75 - (FOR 1721)



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: KTRI40669
HOSE REEL KIT ON-
BOARD MACHINE



CODE:
KTRI40431
KTRI40434
KTRI40435
KTRI40647
MAINTENANCE KIT 500H - (FOR 2017)
MAINTENANCE KIT 500H - (FOR 1721/2021)
MAINTENANCE KIT 500H - (FOR 2515)
MAINTENANCE KIT 500H - (FOR2021)



MISTRAL - HT (3 WHEELS)

MISTRAL - HT4 (4 WHEELS)

PRESSURE

200 bar

FLOW RATE

900 l/h

ABSORBED POWER

6,4 kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ DIGITAL TEMPERATURE STABILIZER CONTROL - DTSC
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECKLED - MCL



MISTRAL-HT (3 WHEELS)

MISTRAL-HT (4 WHEELS)

SPECIAL MACHINE: 100°C MAX TEMPERATURE, BOTH HIGH AND LOW PRESSURE MODE

(WITH NO-MARKING RUBBER WHEELS / 3 WHEELS VERSION)

MOST FREQUENTLY USE

AGRICULTURE/FARMING



AUTOMOTIVE



CONSTRUCTION



RETAIL



LOGISTICS AND TRANSPORT



INDUSTRY



COMMUNITIES



WASTE MANAGEMENT



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



IPC
PUMP



DIGITAL
DISPLAY
DD



IPC'S
EXCLUSIVE
BOILER



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP



M421
ANTI-SCALE

SPECS



WARNING LAMP INFORMS WHEN TEMPERATURE IS BETWEEN 90-100°C



BOILER CAN BE OPENED FROM THE TOP FOR AN EASY CLEANING



COMPLETE WITH NON MARKING WHEELS FOR FLAT SURFACED (3 WHEELS VERSIONS)

TECHNICAL DATA

3 wheels

Code

4 wheels

Code

PERFORMANCE

Operating pressure	bar/Mpa	30-200/3-20
Flow rate	l/h	450-900
Outlet water temperature	°C	100
Power supply	Ph-V-Hz/A	3-400-50/13
Absorbed power	kW	6,4
Motor pole/rpm		4-1400
Remote control		DTS
Pump/head/pistons		lpc plunger/brass/ceramic
Boiler thermal power	kW	100
Fuel consumption	kg/h	7,7
Fuel tank	l	25
Detergent tank	l	22
Detergent delivery		high pressure
Dimension (LxWxH)	cm	110x70x90
Weight	kg	140

MISTRAL-HT D2015P T

IDAC41466

MISTRAL-HT4 D2015 T

IDAC41467

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000
WITH CERAMIC VALVE



CODE: LCPR40191
EXTENSION PD70 cm
INOX



CODE: UGLN05200
H.P. NOZZLE 1/4 1505



CODE: UGLN07790
L.P. NOZZLE 1/4 2513



CODE: TBAP40237
H.P. HOSE 10MT 1/4"
(NO-MARKING)



OPTIONAL ACCESSORIES

CODE: KTRI40341
HOSE REEL KIT



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: PRCH40039
ANTISCALE TREATMENT
M421 1Kg X6



CODE: PRCH40040
ANTISCALE TREATMENT
M421 10 Kg



CODE: KTRI40568
MAINTENANCE KIT 500H



CODE: RCIN10810 /RCIN40059
HOSE COUPLING M22



CODE: LCLC40027
STAINLESS STEEL FLOOR
CLEANER



CODE: UGLN49988
H.P. NOZZLE 1/4 25025



CODE: KTRI40669
HOSE REEL KIT ON-
BOARD MACHINE



**LANCE WITHOUT NOZZLES.
USE: NO. 2 CODE: UGLN49988
THAT SHOULD BE ORDERED
SEPARATELY**

MISTRAL-H AUTOMATIC (3 WHEELS)

MISTRAL-H AUTOMATIC (4 WHEELS)

PRESSURE

200 bar

FLOW RATE

1300 l/h

ABSORBED POWER

8,5 kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ DIGITAL TEMPERATURE STABILIZER CONTROL - DTSC
- ▶ MAINTENANCE CHECKLED - MCL
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ LED INDICATOR LIGHT REACHING TEMPERATURE TL



MISTRAL-H AUTOMATIC (4 WHEELS)

MISTRAL-H AUTOMATIC (3 WHEELS)

MOST FREQUENTLY USE

AGRICULTURE/FARMING



AUTOMOTIVE



CONSTRUCTION



RETAIL



LOGISTICS AND TRANSPORT



INDUSTRY



COMMUNITIES



WASTE MANAGEMENT



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



CIRCULAR
DESIGN
& OPERATION



IPC
PUMP



DIGITAL
DISPLAY
DD



AUTOMATIC
PRESSURE
WASHER



IPC'S
EXCLUSIVE
BOILER



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP



M421
ANTI-SCALE

SPECS



CONTROL PANEL WITH
INDICATOR LAMPS AND
DISPLAY



USER FRIENDLY ACCESS TO
ADJUSTMENT AND LIQUID
REFILLING



BOILER CAN BE OPENED
FROM THE TOP FOR AN EASY
CLEANING

TECHNICAL DATA

		3 WHEELS	4 WHEELS
		MISTRAL-H A D2021 T	MISTRAL-H4 A D2021P T
Code		IDAC41468	IDAC41469
PERFORMANCE			
Operating pressure	bar/Mpa	30-200/3-20	30-200/3-20
Flow rate	l/h	650-1300	650-1300
Outlet water temperature	°C	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/16,6	3-400-50/15,4
Absorbed power	kW	8,5	8,2
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	≤100	≤100
Fuel consumption	kg/h	7,4	7,7
Fuel tank	l	25	25
Detergent tank	l	22	22
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90
Weight	kg	166,4	166,4

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN02303
H.P. NOZZLE 1/4 15065



CODE: TBAP40309
HIGH PRESSURE HOSE 10 m



CODE: -
ANTI-SCALE TREATMENT
M421 1 Kg



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm



CODE: PRCH40041
SAND BAG 25 Kg



CODE: TBAP24406
DRAIN KIT 20 m



CODE: LCPR40171
EXTENSION P70 + R.J. 255
Ø0,65



CODE: LCPR29363
STEAM LANCE - P70



CODE: KTRI40341
HOSE REEL KIT



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40669
HOSE REEL KIT ON-
BOARD MACHINE



CODE: RCIN10810 / RCIN40059
HOSE COUPLING M22



CODE: KTRI40647
MAINTENANCE KIT 500H



CODE: LCLC40027
STAINLESS STEEL FLOOR
CLEANER



SKID FUEGO-H

PRESSURE

180 bar

FLOW RATE

1080 l/h

ENGINE POWER


13 Hp



EXCLUSIVE CHARACTERISTICS

- ▶ BY-PASS - BYP
- ▶ ENGINE THROTTLE CONTROL - RS
- ▶ BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

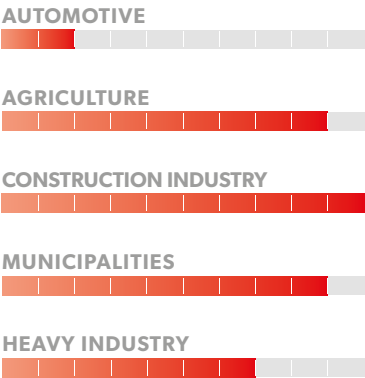

PETROL ENGINE

INNOVATIONS



G6000™ CERAMIC HIGH-TECH GUN



DIAD DIRECT INJECTION DETERGENT AND ANTI-SCALE



IPC'S EXCLUSIVE BOILER

SPECS



POWERFULL HONDA GX 390 LK AIR COOLED 4-STROKE OHV PETROL ENGINE.



EPOXY POLYESTER POWDER COATED TUBULAR FLAME-TROLLEY



MOBILE UNITS OR TRUCK MOUNTED

TECHNICAL DATA

SKID FUEGO-H L1818PI P		
Code	IDAC49710	
PERFORMANCE		
Operating pressure	bar/Mpa	70-180/7-18
Flow rate	l/h	680-1080
Outlet water temperature	°C	80-120
Engine type	GX390K1 LK-E-OH 12V (gasoline)	
Engine power	Hp	13
Engine speed	Rpm	1800
Remote control	BY-PASS	
Pump/head/pistons	Plunger/brass/ceramic	
Boiler thermal power	kW	67
Fuel consumption	kg/h	5,2
Fuel tank	l	26
Detergent tank	l	optional (16 l)
Detergent delivery	high pressure	
Dimension (LxWxH)	cm	117x68x87
Weight	kg	235,4

STANDARD EQUIPMENT

CODE: IPPR40025 HANDGRIP G6000	CODE: LCPR40159 EXTENSION P70 INOX 0°	CODE: UGLN49994 H.P. NOZZLE 1/4 2506	CODE: TBAP40009 HIGH PRESSURE HOSE 10 m
			

OPTIONAL ACCESSORIES

CODE: LCPR29360 MUDGUARD LANCE - P90	CODE: LCPR24906 LANCE WITH DOUBLE NOZZLE HOLDER	CODE: LCPR29363 STEAM LANCE - P70	CODE: SPID24939 FIXED HYDROBRUSH LANCE	CODE: PRCH00040 ANTI-SCALE TREATMENT M421 10 Kg
				
CODE: RCIN10810 /RCIN40059 HOSE COUPLING M22	CODE: TBAP24406 DRAIN KIT 20 m	CODE: LCPR88522 EXTENSION P70 TURBO D. 0.65	CODE: KTRI37674 HOSE REEL KIT P 35-15 WALL	CODE: KTRI26685 TROLLEY KIT P 1-15 (WITH 3 WHEELS)
				PICTURE NOT AVAILABLE
CODE: KTRI27587 HOSE REEL KIT P35-7 (FOR KTRI26685)	CODE: KTRI26686 TROLLEY KIT P 1-16 (WITH 4 WHEELS)	CODE: KTRI26688 HOSE REEL KIT P35-5 (FOR KTRI26686)	CODE: KTRI26687 LANCE HOLDER KIT	CODE: KTRI26690 DETERGENT TANK
PICTURE NOT AVAILABLE	PICTURE NOT AVAILABLE	PICTURE NOT AVAILABLE	PICTURE NOT AVAILABLE	PICTURE NOT AVAILABLE
CODE: KTRI26689 DESCALING DEVICE	CODE: AVTB39119 STAINLESS STEEL HOSE REEL	CODE: KTRI28914 ROTATING ARM	CODE: LCPR14860 SANDBLASTER KIT D.1,7	CODE: PRCH40041 SAND BAG 25 Kg
PICTURE NOT AVAILABLE				
CODE: PRCH00039 ANTI-SCALE TREATMENT M421 (1 Kg X 6)				
				



STATIONARY

EXCLUSIVE TECHNOLOGIES	100
-------------------------------	-----

MLC-C	102
--------------	-----

ML CMP	104
---------------	-----

ML-C	106
-------------	-----

SML-C	108
--------------	-----

IWD-H	110
--------------	-----

REMOTE CONTROLS

DELAYED TOTAL STOP (DTS) It stops the machine 30 seconds after its last use.

SAFETY DEVICES

MICRO LEAKAGE CONTROL (MLC) The machine stops in case of dangerous leakage in the high-pressure hydraulic circuit.

DRY RUNNING PROTECTION (DRP) It stops the machine in case of lack of water.

LANCE NOZZLE CLOGGED CONTROL (NCC) This stops the machine when the nozzle is clogged.

IGNITION BOILER DELAY (IBD) It ensures low fumes emission levels when the boiler is started.

WORKING HOUR COUNTER (WHC) An electronic hour counter shows the working hours of the machine.

INTELLIGENT PROPORTIONAL SWITCHING OFF (IPSF) It allows automatic total stop of the machine after a period of inactivity, which varies according to how long the machine has been used.

INTELLIGENT AUTOMATIC SWITCH OFF (IASF) This intelligent system automatically switches off the machine after 20 minutes of inactivity.

INFRARED FLAME CONTROL SYSTEM (FCS) This system stops the machine in case of boiler malfunction.

CONTROLS

LIMESCALE/CORROSION PROTECTION UNIT (LCPU) It protects the hot water machines against limescale and corrosion.

FUEL LEVEL CONTROL (FLC) It detects and reports the lack of fuel.

ANTI-SCALE LEVEL CONTROL (ALC) It detects and reports the lack of descaler and stops the machine burner to prevent limescale deposits.

FLOODING PREVENTION SYSTEM (FPS) This system stops the machine after 60 minutes of continuous activity.

EXCLUSIVE TECHNOLOGIES

	MLC-C	MLCMP	ML-C SML-C	IWD-H
	•	•	•	•
	•	•		•
		•		• (optional)
	•	•		•
				•
	•	•		
	•	•		
				•
				•
				•
				• (optional)
				• (optional)
	•	•		

member of **IPC**

MLC-C

DELAYED TOTAL STOP MODELS

PRESSURE

130÷210
bar

FLOW RATE

600÷1000
l/h

ABSORBED POWER


3÷6,4
kW

EXCLUSIVE
CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ DRY RUNNING PROTECTION - DRP



MOST FREQUENTLY USE

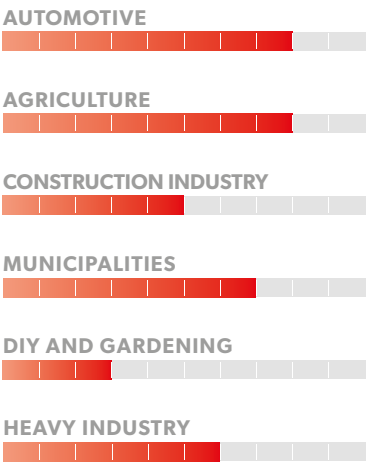

INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



IPC'S
EXCLUSIVE
BOILER

SPECS



EQUIPPED WITH A PAINTED
METAL PLATE FOR WALL-
MOUNTING



PUMP WITH BRASS HEAD
AND THREE CERAMIC
PISTONS ENSURING LONG-
TERM LIFESPAN



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL
OF WORKING PRESSURE

TECHNICAL DATA

		MLC-C D1310P4 M	MLC-C D1813P T	MLC-C D1915P4 T	MLC-C D2117P4 T
Code		PPEL40079	PPEL40081	PPEL40083	PPEL40085
PERFORMANCE					
Operating pressure	bar/Mpa	30-130/3-13	30-180/3-18	30-190/3-19	30-210/3-21
Flow rate	l/h	300-600	400-800	450-900	480-1000
Inlet water max. temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,3	3-400-50/8,6	3-400-50/9,4	3-400-50/12
Absorbed power	kW	3	4,7	5,1	6,4
Motor pole/rpm		4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		-	-	-	-
Dimension (LxWxH)	cm	53x34x60	53x34x60	53x36x60	58x39x60
Weight	kg	37,5	40	45,2	56,7

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: UGLN40000
**H.P. NOZZLE 1/4 15034
(FOR 1310)**



CODE: UGLN49987
**H.P. NOZZLE 1/4 15045
(FOR 1813/1915/2117)**



CODE: TABP40256
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: IPIP40022
GRIP G6000 BAYONET



CODE: LCLC40004
**EXTENSION P70 - INOX
BAYONET**



CODE: LCPR40039
**FOAMER KIT 1 l BAYONET
(FOR IPIP40022)**



CODE: LCPR40040
**FOAMER KIT M22 1 l
(FOR IPPR40025)**



CODE: LCPR14858
**SANDBLASTER KIT Ø 1,4
(FOR 1310) TO USE WITH
IPPR40025**



CODE: LCPR14859
**SANDBLASTER KIT Ø1,5
(FOR 2117) TO USE WITH
IPPR40025**



CODE: LCPR13557
**SANDBLASTER KIT Ø1,6
(FOR 1813/1915) TO USE
WITH IPPR40025**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
**TURBO LANCE TTR-16
D.1,35 - (FOR 1310/1915)
TO USE WITH IPPR40025**



CODE: LCPR40016
**TURBO LANCE TTR-16 D.1,40
(FOR 1813) TO USE WITH
IPPR40025**



CODE: LCPR40054
**TURBO LANCE TPR-255
D.O.40 - (FOR 2117) TO
USE WITH IPPR40025**



CODE: KTRI40311
**MAINTENANCE KIT 500H
(FOR 1310)**



CODE: KTRI40317
**MAINTENANCE KIT 500H
(FOR 1813)**



CODE: KTRI40313
**MAINTENANCE KIT 500H
(FOR 1915)**



CODE: KTRI40338
**MAINTENANCE KIT 500H
(FOR 2117)**



CODE: KTRI40479
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P4/1915P4)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1813P)**



CODE: KTRI40336
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117P4)**



ML CMP

DELAYED TOTAL STOP MODELS

PRESSURE

130÷210
bar

FLOW RATE

600÷1000
l/h

ABSORBED POWER

3÷7,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ NOOZLE CLOG CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS

SPECS



EASY ACCESS TO ALL
COMPONENTS FOR AN EASY
MAINTENANCE



HIGH CAPACITY INLET WATER
FILTER



BY-PASS VALVE IS PROVIDED
WITH 1 HOLDING METAL
PLATE IN ORDER TO PROTECT
IT FROM MECHANICAL STRESS

TECHNICAL DATA

		ML CMP D1310P4 M	ML CMP D1813P T	ML CMP D1915P4 T	ML CMP D2117P4 T
Code		IDAF40486	IDAF40535	IDAF40536	IDAF40537
PERFORMANCE					
Operating pressure	bar/Mpa	30-130/3-13	30-180/3-18	30-190/3-19	30-210/3-21
Flow rate	l/h	300-600	400-800	450-900	480-1000
Inlet water max. temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/15	3-400-50/8,5	3-400-50/9,5	3-400-50/12
Absorbed power	kW	3	5,1	6,5	7,5
Motor pole/rpm		4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		-	-	-	-
Dimension (LxWxH)	cm	59x39x29	59x39x29	59x39x29	59x39x29
Weight	kg	49,2	50	56,4	67

STANDARD EQUIPMENT

CODE: IPIP40022
GRIP G6000 BAYONET



CODE: LCLC40004
EXTENSION P70 INOX BAYONET



CODE: UGLN49990
H.P NOZZLE 1/4 25034 (FOR 1310)



CODE: UGLN49991
H.P NOZZLE 1/4 2504 (FOR 1813)



CODE: UGLN49987
H.P NOZZLE 1/4 15045 (FOR 1915/2117)



CODE: TBAP40486
HIGH PRESSURE HOSE 10 m (FOR 1310, 1813, 1915)



CODE: TBAP40256
HIGH PRESSURE HOSE 10 m (FOR 2117)



OPTIONAL ACCESSORIES

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 (FOR 1310) TO USE WITH IPPR40025



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 (FOR 2117) TO USE WITH IPPR40025



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 (FOR 1813/1915) TO USE WITH IPPR40025



CODE: LCPR93178
TURBO LANCE TTR-16 D.1,35 - (FOR 1310/1915) TO USE WITH IPPR40025



CODE: LCPR40016
TURBO LANCE TTR-16 D.1,40 (FOR 1813) TO USE WITH IPPR40025



CODE: LCPR40054
TURBO LANCE TPR-255 D.0,40 - (FOR 2117) TO USE WITH IPPR40025



CODE: KTRI37674
HOSE REEL KIT



CODE: AVTB39119
INOX HOSE REEL KIT



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: KTRI28914
ROTATING ARM



CODE: LCPR40039
FOAMER KIT BAYONET



CODE: KTRI40311
MAINTENANCE KIT 500H (FOR 1310)



CODE: KTRI40317
MAINTENANCE KIT 500H (FOR 1813)



CODE: KTRI40313
MAINTENANCE KIT 500H (FOR 1915)



CODE: KTRI40338
MAINTENANCE KIT 500H (FOR 2117)



CODE: KTRI40479
KIT FOR HOT WATER FEEDING VERSION (FOR 1310P4/1915P4)



CODE: KTRI40478
KIT FOR HOT WATER FEEDING VERSION (FOR 1813P)



CODE: KTRI40336
KIT FOR HOT WATER FEEDING VERSION (FOR 2117P4)



ML-C

PRESSURE

150÷200
bar

FLOW RATE

900÷1260
l/h

ABSORBED POWER

5,5÷7,1
kW




EXCLUSIVE
CHARACTERISTICS

▶ DELAYED TOTAL STOP - DTS

STAINLESS STEEL STRUCTURE

MOST FREQUENTLY USE

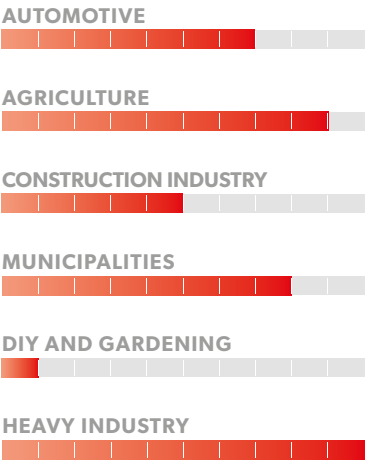

INNOVATIONS



SPECS



HIGH-PRESSURE DETERGENT
DELIVERY DOSING SYSTEM



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL OF
WORKING PRESSURE



PUMP WITH BRASS HEAD
AND THREE CERAMIC
PISTONS ENSURING A LONG-
TERM LIFESPAN

TECHNICAL DATA

		ML-C D1515PIT	ML-C D1521PIT	ML-C D1618PIT	ML-C D2015PIT
Code		IDAF40366	IDAF40367	IDAF40368	IDAF40369
PERFORMANCE					
Operating pressure	bar/Mpa	150/15	150/15	160/16	200/20
Flow rate	l/h	900	1260	1080	900
Inlet water max. temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/9,4	3-400-50/14	3-400-50/14,1	3-400-50/13,2
Absorbed power	kW	5,5	7,1	7,1	7,1
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpg plunger/brass/ceramic	lpg plunger/brass/ceramic	lpg plunger/brass/ceramic	lpg plunger/brass/ceramic
Detergent tank	l	optional [2x25 l]	optional [2x25 l]	optional [2x25 l]	optional [2x25 l]
Detergent delivery		high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	77x41x41	77x41x41	77x41x41	77x41x41
Weight	kg	85	90	92	92
Motor -pump coupling		elastic coupling	elastic coupling	elastic coupling	elastic coupling

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 1515/2015)



CODE: LCPR40159
EXTENSION P70 INOX 0° -
(FOR 1521/1618)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2015)



CODE: UGLN49993
H.P. NOZZLE 1/4 25055
(FOR 1515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1521)



CODE: UGLN49995
H.P. NOZZLE 1/4 25065
(FOR 1618)



CODE: TBAP25324
H.P. HOSE R1 10 m 5/16''
(FOR 1515)



CODE: TBAP40010
H.P. HOSE R2 10 m 3/8''
(FOR 1521/1618)



CODE: TBAP40009
H.P. HOSE R2 10 m 5/16''
(FOR 2015)



OPTIONAL ACCESSORIES

CODE: KTRI37674
HOSE REEL KIT



CODE: AVTB39119
INOX HOSE REEL KIT



CODE: LCPR39134
FOAMER HEAD P30



CODE: KTRI28914
ROTATING ARM



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: KTRI28935
LANCE HOLDER



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 2015)



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 1515/1618)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI39249
PAINTED WALL FIXING
BRACKET



CODE: KTRI75463
STAINLESS STEEL WALL
FIXING BRACKET



CODE: KTRI39250
PAINTED STAND



CODE: KTRI75370
STAINLESS STEEL STAND



CODE: KTRI39246
REMOTE CONTROL



CODE: KTRI75367
REMOTE CONTROL WITH
DETERGENT CONTROL



CODE: KTRI39247
REMOTE CONTROL WITH
DETERGENT CONTROL +
WAX CONTROL



CODE: KTRI49930
KIT FOR HOT WATER FEEDING
VERSION
(FOR 1515/1521/2015)



CODE: KTRI49931
KIT FOR HOT WATER FEEDING
VERSION (FOR 1618)



CODICE: MPVR13701
25L DETERGENT TANK
2 PCS



CODICE: LCPR41973
TURBO LANCE Ø 0.55
(FOR 1515)



CODE: LCPR40088
TURBO LANCE Ø 0.80
(FOR 1521)



CODE: LCPR88522
TURBO LANCE Ø 0.65
(FOR 1618)



CODE: LCPR40045
TURBO LANCE Ø 0.45
(FOR 2015)



CODE: RCIN10810 / RCIN40059
HOSE COUPLING M22



SML-C

PRESSURE

100÷200
bar

FLOW RATE

1260÷1800
l/h

ABSORBED POWER

6,3÷8,1
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

STAINLESS STEEL STRUCTURE

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN

SPECS



HIGH-PRESSURE DETERGENT
DELIVERY DOSING SYSTEM



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL OF
WORKING PRESSURE



STAINLESS STEEL WATER
TANK

TECHNICAL DATA

		SML-C D1030PI T	SML-C D2021PI T
Code		IDAF40370	IDAF40372
PERFORMANCE			
Operating pressure	bar/Mpa	100/10	200/20
Flow rate	l/h	1800	1260
Inlet water max. temperature	°C	50	50
Power supply	Ph-V-Hz/A	3-400-50/12,8	3-400-50/15,5
Absorbed power	kW	6,3	8,1
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpg plunger/brass/ceramic	lpg plunger/brass/ceramic
Detergent tank	l	optional (2x25)	optional (2x25)
Motor pump coupling		Flexible coupling	Flexible coupling
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)		93x44x44	93x44x44
Weight	kg	80	120

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN02317
H.P. NOZZLE 1/4 2515
(FOR 1030)



CODE: UGLN49994
H.P. NOZZLE 1/4 2506
(FOR 2021)



CODE: TBAP40010
H.P. HOSE R2 10 m 5/16"



OPTIONAL ACCESSORIES

CODE: KTRI37674
HOSE REEL KIT



CODE: AVTB39119
INOX HOSE REEL KIT INOX



CODE: LCPR39134
FOAMER HEAD P30



CODE: KTRI28914
ROTATING ARM



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: KTRI28935
LANCE HOLDER



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 2021)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR88522
EXTENSION P70 TURBO
D.065 (FOR 2021)



CODE: KTRI49930
KIT FOR HOT WATER
FEEDING VERSION



CODE: KTRI75461
PAINTED WALL FIXING
BRACKET



CODE: KTRI75369
PAINTED STAND



CODE: KTRI75462
STAINLESS STEEL WALL
FIXING BRACKET



CODE: KTRI75371
STAINLESS STEEL STAND



CODICE: MPVR13701
25L DETERGENT TANK
2 PCS



CODE: KTRI39246
REMOTE CONTROL



CODE: KTRI75367
REMOTE CONTROL WITH
DETERGENT CONTROL



CODE: KTRI39247
REMOTE CONTROL WITH
DETERGENT CONTROL +
WAX CONTROL



CODE: RCIN10810 /RCIN40059
HOSE COUPLING M22



CODE: LCPR40089
EXTENSION P70 TURBO
D1,0 - (FOR 1030)



IWD-H

PRESSURE

150÷200
bar

FLOW RATE

900÷1260
l/h

ABSORBED POWER

6,5÷9,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ BOILER IGNITION DELAY - IBD
- ▶ FUEL LEVEL CONTROL - FLC (OPTIONAL)
- ▶ ANTI-SCALE LEVEL CONTROL - ALC (OPTIONAL)
- ▶ LIMESCALE/CORROSION PROTECT UNIT - LCPU
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF



STAINLESS STEEL STRUCTURE

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC'S
EXCLUSIVE
BOILER

SPECS



STAINLESS STEEL
STRUCTURE



PILOT LIGHTS INDICATING
MACHINE AND BURNER
FUNCTIONING, PLUS FLAME
CONTROL



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL OF
WORKING PRESSURE

TECHNICAL DATA

		IWD-H D1615PI T	IWD-H D1618PI T	IWD-H D2015PI T	IWD-H D1521PI T	IWD-H D2021PI T
Code		IDAC48037	IDAC48038	IDAC48039	IDAC48040	IDAC48041
PERFORMANCE						
Operating pressure	bar/Mpa	160/16	165/16,5	200/20	150/15	200/20
Flow rate	l/h	900	1080	900	1260	1260
Outlet water max. temperature	°C	30-120	30-120	30-120	30-120	30-145
Power supply	Ph-V-Hz/A	3-400-50/10,5	3-400-50/13	3-400-50/14	3-400-50/13	3-400-50/16
Absorbed power	kW	6,5	7,2	7,2	7,2	9,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400
Boiler thermal power	kW	67	88	88	88	88
Fuel consumption	Kg/h	5,8	7,4	7,4	7,4	7,4
Fuel tank	l	optional (25 l)	optional (25 l)	optional (25 l)	optional (25 l)	optional (25 l)
Detergent tank	l	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure
Descaling tank	l	2	2	2	2	2
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpg plunger/brass/ ceramic	lpg plunger/brass/ ceramic	lpg plunger/brass/ ceramic	lpg plunger/brass/ ceramic	lpg plunger/brass/ ceramic
Dimension (LxWxH)	Cm	122x60x75	122x60x75	122x60x75	122x60x75	122x60x75
Weight	Kg	185,6	190	186	185,6	207,8

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 1012/1615/2015)



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 1618/1521/2021)



CODE: UGLN49993
H.P. NOZZLE 1/4 25055
(FOR 1012/1615)



CODE: UGLN49995
H.P. NOZZLE 1/4 25065
(FOR 1618/2021)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2015)



CODE: UGLN49997
H.P. NOZZLE 1/4 15075
(FOR 1521)



CODE: TBAP40008
H.P.HOSER 10 m 5/16"
(FOR 1012/1615/1618/1521)



CODE: TBAP40009
H.P.HOSER 2 10 m 5/16"
(FOR 2015)



CODE: TBAP40010
H.P.HOSER 2 10 m 3/8"
(FOR 2021)



OPTIONAL ACCESSORIES

CODE: AVTB39119
INOX HOSE REEL KIT



CODE: KTRI28914
ROTATING ARM



CODE: LCLC41140
LANCE FOR WASHING
FLOOR - INOX



CODE: LCPR29360
MUDGUARD LANCE



CODE: KTRI48114
REMOTE CONTROL WITH
DETERGENT + WAX CONTROL




CODE: KTRI48110
WALL FIXING BRACKET




CODE: KTRI48111
STAND



CODE: LCPR13557
SANDBLASTER KIT Ø1,6 mm
(FOR 1012/1615)



CODE: LCPR14860
SANDBASTER KIT Ø1,7 (FOR
1618/1521/2021)



CODE: LCPR14859
SANDBLASTER KIT Ø1,5 mm
(FOR 2015)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: MPVR13701
25 l FUEL TANK 1 PC



CODE: MPVR13701
25 l DETERGENT TANK
2 PCS



CODE: LAFN48112
FLUE EXTENSION



CODE: LCPR41973
TURBO LANCE Ø0,55 -
(FOR 1012/1615)



CODE: LCPR88522
TURBO LANCE Ø0,65 -
(FOR 1618/2021)



CODE: LCPR40088
TURBO LANCE Ø0,80 -
(FOR 2015/1521)



CODE: RCIN10810/RCIN40059
HOSE COUPLING M22



CODE: LCPR40040
FOAMER KIT 1L M22





ELECTRICALLY HEATED BOILER

EXCLUSIVE TECHNOLOGIES	114
-------------------------------	-----

MISTRAL-E SPECIAL MACHINE -HIGH TEMPERATURE	116
---	-----

MISTRAL-E PLASTIC COVER	118
--------------------------------	-----

PW-E100 STAINLESS STEEL COVER	120
--------------------------------------	-----

IWD-E	122
--------------	-----

REMOTE CONTROLS

DELAYED TOTAL STOP (DTS)

It stops the machine after 30" from the trigger gun closing.

INTELLIGENT AUTOMATIC SWITCH OFF (IASF)

This control switches off the machine after 20 minutes of no-use.

INTELLIGENT PROPORTIONAL SWITCH OFF (IPSF)

It allows automatic stop of the machine after a period of inactivity, which varies according to how long the machine has been used.

MICRO LEAKAGE CONTROL (MLC)

It stops the machine in case of dangerous leakage in the HP hydraulic circuit.

DRY RUNNING PROTECTION (DRP)

It stops the machine in case of lack of water.

LANCE NOZZLE CLOGGED CONTROL (NCC)

It stops the machine when the nozzle is clogged.

WORKING HOURS COUNTER (WHC)

Electronic hours counter indicates the working hours of the machine.

MAINTENANCE CHECK LED (MCL)

This control device alerts the operator when maintenance is required.

LIMESCALE/CORROSION PROTECTION UNIT (LCPU)

It protects the hot water machines from limescale deposits and corrosion.

INTELLIGENT BOILER TEMPERATURE SETTING SYSTEMS (ITSS)

It's an extremely accurate electronic control device that ensures constant water temperature.

CHEMICAL LEVEL CONTROL (CLC)

It detects and reports the lack of fuel.

ANTI-SCALE LEVEL CONTROL (ALC)

It detects and reports the lack of descaler and stops the machine burner to prevent limescale deposits.

FLOODING PREVENTION SYSTEM (FPS)

This system stops the machine after 60 minutes of continuous activity.

EXCLUSIVE TECHNOLOGIES

[illegible]

MISTRAL-E **ELECTRICALLY HEATED BOILER**

PRESSURE

140
bar

FLOW RATE

240
l/h

ABSORBED POWER

14,1÷27,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL

- WITHOUT EXHAUST GAS
- GREATER EFFICIENCY WITHOUT USE FUEL



SPECIAL MACHINE - HIGH TEMPERATURE

WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

INDUSTRY

AUTOMOTIVE

AGRICULTURE

MUNICIPALITIES

INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



CIRCULAR
DESIGN
& OPERATION



IPC
PUMP



DIGITAL
DISPLAY
DD



IPC'S
EXCLUSIVE
BOILER



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND
EASY TRANSPORT



CONTROL PANEL WITH
INDICATOR LAMPS AND
DISPLAY



3 STAGE HIGH EFFICIENCY
BOILER WITH AISI 316
STAINLESS STEEL STRUCTURE

TECHNICAL DATA

Code		MISTRAL-E D1404 P12 T	MISTRAL-E D1404 P24 T
PERFORMANCE		IDAC41470	IDAC41471
Operating pressure	bar/Mpa	30-140/3-14	30-140/3-14
Flow rate	l/h	240	240
Outlet water temperature max.	°C	80	80
Power supply	Ph-V-Hz/A	3-400-50/21	3-400-50/40
Absorbed power	kW	13,5	27,4
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	24
Antiscale tank	l	25	25
Detergent tank	l	22	22
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90
Weight	Kg	113	113

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P HOSE
10 m 1/4"



CODE: UGLN40042
H.P. NOZZLE 1/4" 1515



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI40686
REMOTE CONTROL



**OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS**

MISTRAL-E **ELECTRICALLY HEATED BOILER**

PRESSURE

170
bar

FLOW RATE

600÷720
l/h

ABSORBED POWER

16÷35,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL

- WITHOUT EXHAUST GAS
- GREATER EFFICIENCY WITHOUT USE FUEL



WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS



CIRCULAR
DESIGN
& OPERATION



IPC
PUMP



DIGITAL
DISPLAY
DD



IPC'S
EXCLUSIVE
BOILER



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND
EASY TRANSPORT



CONTROL PANEL WITH
INDICATOR LAMPS AND
DISPLAY



3 STAGE HIGH EFFICIENCY
BOILER WITH AISI 316
STAINLESS STEEL STRUCTURE

TECHNICAL DATA

		MISTRAL - E D1710 P12 T	MISTRAL-E D1710P17	MISTRAL - E D1712 P24 T	MISTRAL - E D1712 P36 T
Code		IDAC41472	IDAC41666	IDAC41473	IDAC41474
PERFORMANCE					
Operating pressure	bar/Mpa	30-170/3-17	30-170/3-17	30-170/3-17	30-170/3-17
Flow rate	l/h	450-600	450/600	450-720	450-720
Outlet water temperature	°C	80	80	80	80
Power supply	Ph-V-Hz/A	3-400-50/24,7	3-400-50/31	3-400-50/41,8	3-400-50/55,9
Absorbed power	kW	16	20,8	28,2	37,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	17	24	36
Antiscale tank	l	25	25	25	25
Detergent tank	l	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90
Weight	Kg	126,2	126,2	125,2	129,6

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P. HOSE
1/4" 10 m



CODE: UGLN49986
H.P. NOZZLE 1/4" 15035 -
(FOR 12KW AND 17KW)



CODE: UGLN11196
H.P. NOZZLE 1/4" 15035 -
(FOR 12kW)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI40686
REMOTE CONTROL



**OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS**

PW-E100

**ELECTRICALLY HEATED BOILER
STAINLESS STEEL SERIES**

PRESSURE

170
bar

FLOW RATE

600÷720
l/h

ABSORBED POWER

16,3÷36,2
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL



STAINLESS STEEL COVER

WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



ALL
TERRAIN



MODERN
MODULAR
BUILD UP



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND EASE
TRANSPORT



STAINLESS STEEL COVER



HANDLE AND TANKS IN
ROTOMOULDED PLASTIC MATERIAL

TECHNICAL DATA

Code		PW-E100 D1710 P12 T IDAC41131	PW-E100 D1712 P24 T IDAC41132	PW-E100 D1712 P36 T IDAC41133
PERFORMANCE				
Operating pressure	bar/Mpa	30-170/3-17	30-170/3-17	30-170/3-17
Flow rate	l/h	450-600	450-720	450-720
Outlet water temperature	°C	80	80	80
Power supply	Ph-V-Hz/A	3-400-50/25	3-400-50/43,2	3-400-50/54
Absorbed power	kW	15,9	29	36,2
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	24	36
Antiscale tank	l	25	25	25
Detergent tank	l	22	22	22
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90
Weight	Kg	130	132,8	132,9

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P. HOSE
1/4" 10 m



CODE: UGLN49986
H.P. NOZZLE 1/4" 1504
(FOR 24KW/36KW)



CODE: UGLN11196
H.P. NOZZLE 1/4" 15035 -
(FOR 12kW)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI40542
REMOTE CONTROL



CODE: TBAP39120
NO-MARKING HIGH
PRESSURE HOSE 20 m



**OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS**

IWD-E

ELECTRICALLY HEATED BOILER STAINLESS STEEL SERIES

PRESSURE

160÷200
bar

FLOW RATE

600÷1260
l/h

ABSORBED POWER

17,3÷72
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL

- WITHOUT EXHAUST GAS
- GREATER EFFICIENCY WITHOUT USE FUEL



MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



G6000™
CERAMIC
HIGH-TECH GUN



IPC
PUMP



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROLS

SPECS



PROFESSIONAL PRESSURE GAUGE ENSURING A COSTANT CONTROL OF WORKING PRESSURE



HEAVY-DUTY STRUCTURE, WITH STAINLESS STEEL COVER



3 STAGE HIGH EFFICIENCY BOILER WITH AISI 316 STAINLESS STEEL STRUCTURE

TECHNICAL DATA

		IWD-E D1710 P12 T	IWD-E D1712 P24 T	IWD-E D1712 P36 T	IWD-E D1617P 66T	IWD-E D1721P 66T	IWD-E D2015P 66T
Code		IDAC41134	IDAC41135	IDAC41136	IDAC41601	IDAC41602	IDAC41657
PERFORMANCE							
Operating pressure	bar/Mpa	40-170/4-17	40-170/4-17	40-170/4-17	30-160/3-16	30-170/3-17	30-200/3-20
Flow rate	l/h	450-600	450-720	450-720	500-1080	600-1260	450-900
Outlet water temperature	°C	70	70	70	72	72	72
Power supply	Ph-V-Hz/A	3-400-50/27	3-400-50/44	3-400-50/53	3-400-50/>100	3-400-50/>100	3-400-50/>100
Absorbed power	kW	17,3	29,5	35,8	72	72	72
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	12	24	36	66	66	66
Antiscale tank	l	25	25	25	25	25	25
Detergent tank	l	22	22	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	122x60x75	122x60x75	122x60x75	139x68x69	139x68x69	139x68x69
Weight	Kg	148,3	148,80	153,80	200	200	200

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P. HOSE
1/4" 10 m



CODE: UGLN49986
H.P. NOZZLE 1/4" 1504
(FOR 1712/1617/2015)



CODE: UGLN11196
H.P. NOZZLE 1/4" 15035 -
(FOR 1710/1721)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI48111
PAINTED STEEL STAND



CODE: KTRI40538
STAINLESS STEEL STAND



CODE: MPVR13701
DETERGENT TANK 25 l



CODE: KTRI28935
KIT LANCE HOLDER



CODE: KTRI28914
ROTATING ARM



CODE: KTRI37674
HOSE REEL KIT



CODE: KTRI40536
REMOTE COTROL



CODE: AVTB39119
INOX HOSE REEL



CODE: TBAP39120
NO-MARKING HIGH
PRESSURE HOSE 5/16"
10 m



**OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS**

HOT WATER WEED REMOVAL SYSTEM

EXCLUSIVE TECHNOLOGIES	125
-------------------------------	-----

GREEN JET 1010 M	126
-------------------------	-----

GREEN JET 7510	128
-----------------------	-----

EXCLUSIVE TECHNOLOGIES

		GREEN JET
REMOTE CONTROLS		
DELAYED TOTAL STOP - DTS	It stops the machine after 1" seconds and it stops the machine burner after 5" seconds.	•
SAFETY DEVICES		
INTELLIGENT AUTOMATIC SWITCH OFF - IASF	This intelligent system automatically switches off the machine after 20 minutes of inactivity.	•
DRY RUNNING PROTECTION - DRP	It stops the machine after 15" seconds in case of lack of water.	•
INFRARED FLAME CONTROL SYSTEM - FCS	This system stops the machine in case of boiler malfunction.	•
CONTROLS		
MAINTENANCE CHECK LED - MCL	This control device allerts the operator when maintenance is required (maintenance is scheduled every 150 hrs).	•
LIMESCALE/CORROSION PROTECTION UNIT - LCPU	It protects hot-water machines agains limescale and corrosion.	•
ANTISCALE LEVEL CONTROL - ALC	It detects and reports the lack of descaler and stops the machine burner to prevents limescale deposits. It's needed to fill the tank with the anti-scale liquid.	•

GREEN JET 1010 M

PRESSURE

8
bar

FLOW RATE

600
l/h

ABSORBED POWER

0,8
kW

EXCLUSIVE TECNOLOGIES

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL



MOST FREQUENTLY USE

AGRICULTURE



PUBLIC WORK



MUNICIPALITIES



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL



MODERN
MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



STANDARD LIFTING HOOK TO
BE RAISED AND TRASPORTED
ANYWHERE



DIRECT WATER SUPPLY OR
SUCTION WITH EXTERNAL
TANK



CONTROL PANEL SHOWING:
ON/OFF SWITCH, NETWORK
INDICATOR LIGHT, FLAME
CONTROL LIGHT, WARMING
LACK OF ANTISCALE, SERVICE
WARNING LIGHT (150 HRS),
READY WARNING LIGHT
(TEMPERATURE REACHED)

TECHNICAL DATA

GREEN JET 1010 M		
Code	GNVA40051	
Operating pressure	bar/Mpa	8/0,8
Flow rate	l/h	600
Outlet water temperature max	°C	~100
Power supply	Ph-V-Hz/A	1-230-50/3,8
Absorbed power	kW	0,77
Motor power	kW	0,55
Remote control	DTS	
Pump(type)	IPC volumetric rotary vane pump is self-priming, high-performance. The pump body is brass made	
Boiler thermal power	kW	74
Fuel consumption	Kg/h	6,2
Fuel tank	l	18
Antiscale tank	l	2
Dimension (LxWxH)	cm	83x109x100
Weight	Kg	142,3

STANDARD EQUIPMENT

CODE: IPPR40027
HANDGRIP ML330 +
EXTENSION 350 mm



CODE: LCLC40025
70 cm LANCE WITH SPRAY
BAR (SPRAY BAR L= 50 cm)



CODE: TBAP39122
H.P. HOSE 20 m
(NO-MARKING)



OPTIONAL

CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



GREEN JET 7510

PRESSURE

75
bar

FLOW RATE

600
l/h

ABSORBED POWER

1,9
kW



EXCLUSIVE TECHNOLOGIES

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL

MULTIFUNCTIONAL MACHINE: WEEDING, CLEANING AND WASHING

MOST FREQUENTLY USE

AGRICULTURE



PUBLIC WORK



MUNICIPALITIES



INNOVATIONS



AMSC™
ADVANCED
MULTIFUNCTION
SAFETY CONTROL



MODERN
MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



EQUIPPED WITH TWO FIXED PNEUMATIC WHEELS AND TWO PIVOTING WHEELS. (ONE PIVOT WHEEL IS EQUIPPED WITH A BRAKE).



WATER SUPPLY FROM WATER MAINS OR WITH EXTERNAL TANK.



COMPLETE CONTROL PANEL TO MONITOR MACHINE FUNCTIONS.

TECHNICAL DATA

GREEN JET 7510 M		
GNVA40078		
Code		
Operating pressure	bar/Mpa	75/7,5
Flow rate	l/h	360
Outlet water temperature max	°C	~100 (constant temperature)
Power supply	Ph-V-Hz/A	1-230-50
Absorbed power	kW	1,9
Motor power	rpm	4-1400
Remote control	DTS	
Pump/head	lpc plunger/brass/ceramic	
Boiler thermal power	kW	75
Fuel consumption	Kg/h	6,3
Fuel tank	l	18
Antiscale tank	l	2
Dimension (LxWxH)	cm	83x109x100
Weight	Kg	75

STANDARD EQUIPMENT

CODE: IPPR40025 HANDGRIP G6000	CODE: LCPR89117 EXTENSION PD70 INOX 0°	CODE: UGLN02299 H.P. NOZZLE 1/4 1506 (2PC)	CODE: TBAP40229 H.P. HOSE 10 m 1/4''	CODE: LCLC40025 70 cm LANCE WITH SPRAY BAR (SPRAY BAR L= 50 cm)
				

OPTIONAL

CODE: PRCH40040 ANTI-SCALE TREATMENT M421 10 Kg




STEAM GENERATORS

SUGGESTED SECTORS	132
EXCLUSIVE TECHNOLOGIES	134
SG-08/SG-10	136
NEW STEAMY M	138
NEW STEAMY PLUS	138
SG-48	140
SG-50 (WITH TROLLEY)	142
SG-55	144

AUTOMOTIVE



CAR WASHING

- ▶ EXTERNAL DEGREASING AND DEWAXING
- ▶ INTERNAL DEEP CLEANING OF SEATS, MATS AND CEILINGS
- ▶ AC PIPELINE DEEP CLEANING

GARAGES/BODY REPAIR SHOPS AND TYRE CENTRES

- ▶ PARTS CLEANING
- ▶ RIM CLEANING
- ▶ PRE-PAINTING OPERATIONS

CAR-HIRE AGENCIES/CAR DEALERS

- ▶ EXTERNAL DEGREASING AND DEWAXING
- ▶ INTERNAL DEEP CLEANING OF SEATS, MATS AND CEILINGS
- ▶ AC PIPELINE DEEP CLEANING

HO.RE.CA.



HOTELS

- ▶ DEEP GUEST ROOM CLEANING
- ▶ DEEP TOILET CLEANING
- ▶ DEEP MAT, PILLOW, CURTAIN CLEANING AND ODOR CONTROL

RESTAURANTS

- ▶ CARPET AND FURNITURE CLEANING
- ▶ DEEP TOILET CLEANING
- ▶ DEEP AND DAILY KITCHEN CLEANING

CATERING

- ▶ MACHINE AND FOOD PROCESSOR CLEANING
- ▶ DEEP TOILET CLEANING
- ▶ DEEP AND DAILY CLEANING

FOOD INDUSTRY AND RETAILERS



FOOD PROCESSING

- ▶ DEEP CLEANING OF MACHINERY AND FURNITURE
- ▶ DEEP CLEANING OF CONVEYOR BELTS
- ▶ DEEP CLEANING OF TRAYS AND CONTAINERS

FOOD TRANSPORT & STORAGE

- ▶ DEEP INTERNAL CLEANING OF TRUCKS AND VANS
- ▶ DEEP CLEANING OF STORAGE AREAS

FOOD DISPLAY

- ▶ DEEP CLEANING OF COLD DISPLAY UNITS
- ▶ GLASSES AND BENCHES DEEP CLEANING

LARGE COMMON AREAS



SCHOOLS

- ▶ DEEP CLEANING OF COMMON AREAS
- ▶ DEEP TOILET CLEANING AND ODOR CONTROL
- ▶ DAILY/DEEP CLEANING OF RESTAURANTS/KITCHENS

AIRPORTS

- ▶ DEEP CLEANING OF COMMON AREAS
- ▶ DEEP TOILET CLEANING AND ODOR CONTROL
- ▶ DAILY/DEEP CLEANING OF RESTAURANTS/KITCHENS

MARINE TERMINALS AND BUS/ TRAIN/UNDERGROUND/STATIONS

- ▶ DEEP CLEANING OF COMMON AREAS
- ▶ DEEP TOILET CLEANING AND ODOR CONTROL
- ▶ DAILY/DEEP CLEANING OF RESTAURANTS/KITCHENS

BOILER POWER

Steam boilers are designed to ensure best energy performances, component protection against limescale and corrosion. IPC boilers comply with the PED (Pressure Equipment Directive), which regulates the manufacturing of pressure equipment.

ANTI-BUG

Our machines' dry saturated steam (for a temperature of 140-160°C within the boiler) ensures efficient disinfection.

POWER FILTER

This special stainless-steel filter keeps machine circuits and accessories clean from impurities and limescale.

SUCTION POWER

It's available on some models as an integration to steam. Great suction performance is assured both on textiles and hard surfaces, and it can vacuum both dust and liquids.

AUTOMATIC SHUTDOWN

This system automatically deactivates all machine functions when the pressure is lower than 2,5bar.

SAFETY

Our products are protected against high temperatures and our electric panels are protected against humidity and infiltration. Maximum safety is ensured by a protection system that protects against accidental steam discharges.

ERGONOMICS

These devices make the product very functional through intuitive, noiseless, comfortable and easy to use components.

FLEX POWER

Flexible hoses are designed to resist to heavy use or twisting forces.

DURABILITY

High-quality is granted for boilers, heaters, pumps and electronic components. Joints are made of stainless steel or brass, plastic anti-shock device of maximum thickness.

EXCLUSIVE TECHNOLOGIES

	SG-08 SG-10	NEW STEAMY NEW STEAMY PLUS	SG-48	SG-50	SG-55
	•	•	•	•	•
	•	•	•	•	•
			•	•	•
		•	•	•	•
				•	•
	•	•	•	•	•
	•	•	•	•	•
	•	•	•	•	•
	•	•	•	•	•

SG-08/SG-10 (ONLY STEAM)

PRESSURE

4,5÷6
bar

STEAM FLOW RATE

50÷80
g/min

ABSORBED POWER

2÷3,2
kW

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTIBUG
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY



SG-10
BOILER WITH AUTO FILLING TANK

MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS



SPECS



HANDLE FOR A CONVENIENT
TRANSPORTATION



STAINLESS STEEL
STRUCTURE SUITABLE FOR
AREAS WHERE HYGENE IS A
MUST



DIGITAL INDICATOR OF:
- BOILER TEMPERATURE
- STEAM READY
- WATER LACK

TECHNICAL DATA

		SG-8 S 4507 M	SG-10 S 5007 M	SG-10 S 6008 M
Code		GNVA40036	GNVA40037	GNVA40038
PERFORMANCE				
Operating pressure	bar/Mpa	4,5/0,45	5/0,5	6/0,6
Steam flow rate	g/min	~ 50÷60	~ 60÷70	~ 65÷80
Max steam temperature	°C	150	160	165
Start up time	min	~ 8	~ 3	~ 2,5
Power supply	Ph-V-Hz	1-230-50	1-230-50	1-230-50
Max absorbed power	kW	2	2,2	3,2
Boiler volume	l	2	1,8 (continuous recharge)	1,8 (continuous recharge)
Water tank	l	-	2,5	2,5
Dimension (LxWxH)	cm	45x28x31	45x28x31	45x28x31
Weight	kg	10	8	10

STANDARD EQUIPMENT

CODE: IPIP40019
HANDGRIP + STEAM HOSE
2,5 m



CODE: MPVR40851
EXTENSION TUBE
L=500MM (2 PCS)



CODE: MPVR40852
NOZZLE JOINT



CODE: SPPV40052
GLASS CLEANER



CODE: SPPV40053
MULTIPURPOSE BRUSH



CODE: SPPV40054
TRIANGULAR BRUSH



CODE: SPPV40055
STEAM LANCE CURVED
L= 175



CODE: SPPV40056
SMALL ROUND BRUSH WITH
POLYESTER BRISTLES D.28



CODE: SPPV40057
SMALL ROUND BRUSH
WITH BRASS BRISTLES D.28



CODE: SPPV40058
RECTANGULAR CLOTH



OPTIONAL ACCESSORIES

CODE: MPVR40857
SELF REFILLING BOTTLE



CODE: AZMC40024
WRENCH FOR
MAINTENANCE



CODE: KTRI40446
TROLLEY



member of **IPC**

NEW STEAMY M
NEW STEAMY PLUS

(STEAM+SUCTION)

PRESSURE

5÷5,5 bar

STEAM FLOW RATE

80÷100
g/min

ABSORBED POWER

3
kW



NEW
STEAMY



NEW STEAMY PLUS- BOILER WITH AUTO-FILLING
TANK

EXCLUSIVE
CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI-BUG
- ▶ SUCTION POWER
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY

MOST FREQUENTLY USE




SPECS



HANDLE FOR A CONVENIENT
TRANSPORTATION.



CONTROL PANEL ENSURING
A CONSTANT CHECK OF
MACHINE MAIN FUNCTIONS.



ROTARY KNOB FOR STEAM
QUANTITY CONTROLLER

TECHNICAL DATA

		NEW STEAMY	NEW STEAMY PLUS
Code		GNVA47891	GNVA40008
PERFORMANCE			
Operating pressure	bar/Mpa	5/0,5	5,5/0,55
Steam flow rate	g/min	0-80	0-100
Max steam temperature	°C	140	140
Start up time	min	~ 7	~ 7
Power supply	Ph-V-Hz	1-230-50	1-230-50
Max absorbed power	kW	3	3
Boiler volume	l	2,2	2,2 (auto-filling)
Water tank	l	2	2
Dimension (LxWxH)	cm	57x40x65	57x40x65
Weight	kg	16	16,6

STANDARD EQUIPMENT

CODE: IPIP45757
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(FOR NEW STEAMY)



CODE: IPIP40001
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(FOR NEW STEAMY PLUS)



CODE: KTRI46482
ACCESSORIES KIT
STEAM/SUCTION



OPTIONAL ACCESSORIES

CODE: IPIP47898
HANDGRIP + HOSE
STEAM 2,5 m
(FOR NEW STEAMY)



CODE: IPIP45815
HANDGRIP + HOSE
STEAM 5 m
(FOR NEW STEAMY PLUS)



CODE: KTRI40275
STEAM ONLY
ACCESSORIES KIT



CODE: KTRI89496
TROLLEY



CODE: KTRI40269
DESCALING KIT (5 BAGS)



CODE: SPPV46076
BRASS BRUSH Ø30



CODE: SPPV40035
BRASS BRUSH Ø50



SG-48 (STEAM+SUCTION)

PRESSURE

8
bar

STEAM FLOW RATE

100
g/min

ABSORBED POWER


3,5
kW



EXCLUSIVE
CHARACTERISTICS

- ▶ SUCTION POWER
- ▶ POWER BOIL
- ▶ ANTI BUGS
- ▶ POWER FILTER
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY
- ▶ DURABILITY

MOST FREQUENTLY USE

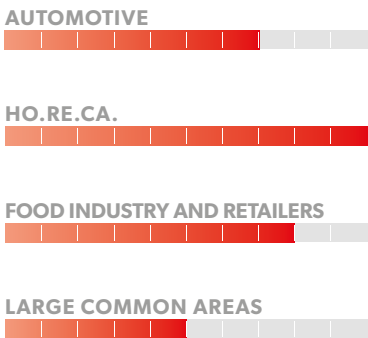

SPECS



DIGITAL INDICATOR OF:
STEAM TEMPERATURE,
STEAM READY AND LACK OF
WATER.



STAINLESS STEEL STRUCTURE



5 LITRES DETERGENT AND
WATER TANK

TECHNICAL DATA

SG-48 8010 M

Code

GNVA40043

PERFORMANCE

Operating pressure	bar/Mpa	8/0,8
Steam flow rate	g/min	80÷100
Steam temperature (max)	°C	185
Start up time	min	6
Power supply	Ph-V-Hz/A	1-230-50/15,2
Absorbed power max.	kW	3,5
Vacuum power	kW	1,4
Boiler power	kW	3,4
Boiler volume	l	3,2
Water tank	l	5
Detergent tank	l	5
Dimension (LxWxH)	cm	74,5x48x104
Weight	Kg	38

STANDARD EQUIPMENT

CODE: IPIP40021
HANDGRIP + HOSE 4 m



CODE: MPVR40958
HOSE EXTENSION
L=500 mm 2 PZ



CODE: SPPV40060
MULTIPURPOSE FLOOR
BRUSH



CODE: SPPV40061
CARPET PROTECTION FOR
MULTIPURPOSE BRUSH



CODE: SPPV40062
FRAME WITH BRISTLES AND
RUBBER SCRAPERS FOR
MULTIPURPOSE BRUSH



CODE: SPPV40063
BRUSH FOR WINDOW
CLEANING



CODE: SPPV40064
TRANSPARENT NOZZLE



CODE: SPPV40065
LARGE SUCTION NOZZLE
+ SQUEEGEE



CODE: SPPV40066
SMALL SUCTION NOZZLE



CODE: SPPV40067
STEAM LANCE



CODE: SPPV40056
ROUND BRUSH POLYESTER
BRISTLE Ø28 mm



CODE: SPPV40068
ROUND BRUSH POLYESTER
BRISTLE Ø65 mm



CODE: SPPV40069
ROUND BRUSH POLYESTER
BRISTLE Ø40 mm



CODE: SPPV40070
ROUND BRUSH INOX
BRISTLE Ø40 mm



CODE: AZMC40024
WRENCH FOR
MAINTENANCE



CODE: SPPV40058
RECTANGULAR CLOTH



OPTIONAL ACCESSORIES

CODE: SPPV40072
INJECTION/EXTRACTION
NOZZLE



CODE: SPPV40073
BRISTLE FRAME FOR
INJECTION/EXTRACTION
NOZZLE L=150 mm



CODE: TTRT40000
ROTATING HEAD



CODE: TBFX40013
STEAM HOSE 6MT



ACCESSORIES SUITABLE FOR INTERNAL CAR CLEANING

ACCESSORY FOR CLEANING / SANITIZING BARRIQUE

SG-50 (WITH TROLLEY)

PRESSURE

5÷7
bar

FLOW RATE

100÷140
g/min

ABSORBED POWER

2,9÷7,1
kW

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI BUGS
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY
- ▶ POWER FILTER
- ▶ POWER SUCTION

MOST FREQUENTLY USE

HEALTHCARE



FOOD PROCESSING



FOOD RETAIL



TRANSPORT



INDUSTRY



EDUCATION



WINERY




HO.RE.CA.



INNOVATIONS



SPECS



STAINLESS STEEL STRUCTURE, SUITABLE FOR AREAS WHERE HYGIENE IS A MUST



INTEGRATED TROLLEY AND VACUUM CLEANER TO FACILITATE MANOEUVRABILITY AND TRANSPORT



CONTROL PANEL WITH MICRO TOUCH BUTTONS AND ROTARY KNOB FOR STEAM QUANTITY CONTROL

TECHNICAL DATA

		SG-50 S 5010 M GNVA40068	SG-50 S 5014 T GNVA40069
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	2,5-5/0,25-0,5	4,5-7/0,45-0,7
Steam flow rate	g/min	0-100	0-140
Steam temperature	°C	160	160
Start up time	min	~ 5	~ 5
Power supply	Pw-V-Hz/A	1-230-50/15	3-400-50/10,7
Vacuum power	KW	1,1	1,1
Absorbed power	kW	3,5	7,1
Boiler volume	l	4	5
Water tank	l	6	6
Detergent tank	l	6	6
Dimensions (LxWxH)	cm	109x40x107	109x40x107
Weight	kg	53,6	57,1

STANDARD EQUIPMENT (STEAM AND SUCTION)

CODE: IPIP40004

HANDGRIP + 5 m HOSE

CODE: KTRI40277

ACCESSORIES KIT *



SINGLE COMPONENTS INCLUDED IN KIT KTRI40277*

CODE: SPPV45770

MULTIUSE FLOOR
BRUSH



CODE: SPPV45762

INJECTION +
EXTRACTION
NOZZLE



CODE: SPPV45769

BRASS SQUEEGEE



CODE: SPPV45764

UNIVERSAL
STEAM LANCE



CODE: SPPV46531

SLOPING NOZZLE



CODE: SPPV87590

INSERT FOR
RECTANGULAR
BRUSH (TO BE
USED WITH SLOPING
NOZZLE SPPV46531)



CODE: MPVR45761

L= 50 cm HOSES
EXTENSION
(2PCS)



CODE: KTRI46580

O-RING KIT (FOR
HOSE EXTENSION
MPVR45761)



OPTIONAL ACCESSORIES (ONLY STEAM)

CODE: IPIP45815

HANDGRIP + 5 m HOSE



CODE: KTRI40275 **

ACCESSORIES KIT



CODE: SPPV40083

L=21 cm RECTANGULAR
MULTIUSE BRUSH (TO BE USED
WITH IPIP45815 + MPVR45785)



CODE: SPPV40084

STEAM CONTACT NOZZLE



CODE: SPPV40079

BASIC STEAM MOP



CODE: SPPV40080

ERGONOMIC STEAM MOP



CODE: FRAN01859

1 PCS MICROFIBER CLOTH
(TO BE USED WITH STEAM MOP
SPPV40079/40080)



CODE: FRAN01860

10 PCS KIT MICROFIBER
CLOTH (TO BE USED WITH STEAM
MOP SPPV40079/40080)



CODE: PANN00125

1 PCS MICROFIBER CLOTH
L= 20 cm (TO BE USED WITH
RECTANGULAR MULTIUSE BRUSH
SPPV40083)



CODE: PANN00138

10 PCS KIT MICROFIBER
CLOTH L= 20 cm (TO BE USED
WITH RECTANGULAR MULTIUSE
BRUSH SPPV40083)



CODE: PANN00136

1 PCS MICROFIBER CLOTH
20 X3 cm (TO BE USED WITH
STEAM CONTACT NOZZLE
SPPV40084)



CODE: PANN00139

10 PCS KIT MICROFIBER
CLOTH 20 X3 cm (TO BE USED
WITH STEAM CONTACT NOZZLE
SPPV40084)



SINGLE COMPONENTS INCLUDED IN KIT KTRI40275**

CODE: SPPV89000

RECTANGULAR
MULTI-USE BRUSH



CODE: MPVR45785

L= 50 cm HOSE
EXTENSION (2PCS)



CODE: SPPV45789

BRUSH FOR
WINDOW CLEANING



CODE: SPPV45793

120° CURVED STEAM
LANCE



CODE: SPPV89931

30 mm NYLON
BRISTLES BRUSH
(3PCS)




CODE: SPPV87589

50 mm NYLON
BRISTLES BRUSH
(3PCS)



CODE: KTRI89902

O-RING KIT (FOR HOSE
EXTENSION MPVR45785)



SG-55 (STEAM+SUCTION)

PRESSURE

8
bar

STEAM FLOW RATE

250
g/min

ABSORBED POWER

10,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOIL
- ▶ ANTI BUGS
- ▶ POWER FILTER
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY



MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS



SPECS



STANDARD VACUUM
CLEANER IN STAINLESS
STEEL STRUCTURE.



STAINLESS STEEL STRUCTURE



CONTROL PANEL:
- PRESSURE GAUGE
- BOILER TEMPERATURE DIGITAL
INDICATOR
- STEAM READY INDICATOR LIGHT
- DETERGENT LACK INDICATOR
LIGHT
- POWER SUPPLY INDICATOR
LIGHT
- STEAM OUTPUT REGULATOR
- BOILER SWITCH
- DETERGENT SWITCH
- MAIN SWITCH

TECHNICAL DATA

		SG-55 8025 T
Code		GNVA40047
PERFORMANCE		
Operating pressure	bar/Mpa	8/0,8
Steam flow rate	g/min	250
Steam temperature (max)	°C	180
Start up time	min	~ 5
Power supply	Ph-V-Hz	3-400-50
Absorbed power max.	kW	10,4
Vacuum power	kW	1,4
Boiler volume	l	4,2
Water tank	l	15
Detergent tank	l	5
Dimension (LxWxH)	Cm	80x55x102
Weight	Kg	59,5

STANDARD EQUIPMENT

CODE: IPIP40021
HANDGRIP + HOSE 4 m



CODE: MPVR40958
HOSE EXTENSION
L=500 mm 2 PZ



CODE: SPPV40060
MULTIPURPOSE FLOOR
BRUSH



CODE: SPPV40061
CARPET PROTECTION FOR
MULTIPURPOSE BRUSH



CODE: SPPV40062
FRAME WITH BRISTLES AND
RUBBER SCRAPERS FOR
MULTIPURPOSE BRUSH



CODE: SPPV40063
GLASS CLEANER



CODE: SPPV40065
LARGE SUCTION NOZZLE
+ SQUEEGEE



CODE: SPPV40066
SMALL SUCTION NOZZLE



CODE: SPPV40067
STEAM LANCE



CODE: SPPV40056
ROUND BRUSH POLYESTER
BRISTLE Ø28 mm



CODE: SPPV40068
ROUND BRUSH POLYESTER
BRISTLE Ø65 mm



CODE: SPPV40069
ROUND BRUSH POLYESTER
BRISTLE Ø40 mm



CODE: SPPV40070
ROUND BRUSH INOX
BRISTLE Ø40 mm



CODE: AZMC40024
WRENCH FOR
MAINTENANCE



OPTIONAL ACCESSORIES


CODE: SPPV40072
INJECTION/EXTRACTION
NOZZLE



CODE: SPPV40073
BRISTLE FRAME FOR
INJECTION/EXTRACTION
NOZZLE L=150 mm



CODE: SPPV40058
MICROFIBER CLOTH



CODE: TTRT40000
ROTATING HEAD



CODE: TBFX40013
STEAM HOSE 6MT



ACCESSORIES SUITABLE FOR INTERNAL CAR CLEANING

ACCESSORY FOR CLEANING / SANITIZING BARRIQUE

STEAM + SUCTION BASIC ACCESSORIES

CODE: KTRI40272
WET & DRY VACUUM
SERVICE FOR SG-50



CODE: IPIP45757
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(STANDARD FOR NEW
STEAMY)



CODE: IPIP40001
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(STANDARD FOR NEW
STEAMY PLUS)



CODE: IPIP40004
HANDGRIP + HOSE
STEAM/SUCTION 5 m
(OPTIONAL FOR SG-50)



CODE: KTRI40277
ACCESSORIES KIT
STEAM/SUCTION
(OPTIONAL FOR SG-50)



CODE: KTRI46482
ACCESSORIES KIT
STEAM/SUCTION
(FOR NEW STEAMY / NEW
STEAMY PLUS)



SINGLE COMPONENTS INCLUDED IN KIT KTRI46482

CODE: SPPV45770
MULTIUSE FLOOR BRUSH



CODE: SPPV45762
INJECTION + EXTRACTION
NOZZLE



CODE: SPPV45769
SQUEEGEE NOZZLE



CODE: SPPV45764
UNIVERSAL STEAM LANCE



CODE: SPPV46531
SLOPING NOZZLE



CODE: SPPV87590
RECTANGULAR NYLON
BRUSH



CODE: MPVR45761
HOSE EXTENSION
STEAM/SUCTION (2 PCS)



CODE: KTRI46580
O-RING KIT



CODE: SPPV45763
STEAM NEBULIZER



CODE: MPVR45765
CURVED STEAM LANCE



CODE: SPPV89931
Ø30 NYLON BRISTLES
BRUSH (1 PCS)



CODE: SPPV87585
ROUND BRUSH INSERT



CODE: SPPV87587
TRIANGULAR BRUSH
INSERT



CODE: SPPV45766
Ø30 HALF NYLON
BRISTLES BRUSH (3PCS)



SINGLE COMPONENTS INCLUDED IN KIT KTRI40277

CODE: SPPV45770
MULTIUSE FLOOR BRUSH



CODE: SPPV45762
INJECTION + EXTRACTION
NOZZLE



CODE: SPPV45769
SQUEEGEE NOZZLE



CODE: SPPV45764
UNIVERSAL STEAM LANCE



CODE: SPPV46531
SLOPING NOZZLE



CODE: SPPV87590
RECTANGULAR NYLON
BRUSH



CODE: MPVR45761
HOSE EXTENSION
STEAM/SUCTION (2 PCS)



CODE: KTRI46580
O-RING KIT



SINGLE COMPONENTS INCLUDED IN MULTIUSE FLOOR BRUSH COD: SPPV45770

CODE: SPPV87588
DUST BRUSH INSERT



CODE: SPPV45774
STRIP BRISTLES BRUSH
L=300 mm



CODE: SPPV45772
STRIP BRISTLES BRUSH
L=300 mm



CODE: SPPV45773
STRIP BRISTLES BRUSH
L=300 mm



CODE: MPVR45775
STRIP BRISTLES BRUSH
L=300MM



STEAM + SUCTION SPECIAL APPLICATIONS ACCESSORIES

CODE: SPPV40032
23 cm TRANSPARENT
INJECTION + EXTRACTION
NOZZLE



CODE: SPID45330
DEPRESSION TURBO
BRUSH



CODE: SPPV40033
WALL PAPER REMOVER
210X290 mm



CODE: SPPV40038
WINDOW CLEAN NOZZLE



CODE: SPPV48971
ROUND BRUSH INSERT
(TO USE WITH SPPV46531)



CODE: SPPV45763
SPRAYER
(TO USE WITH SPPV45764)



CODE: MPVR45765
CURVED STEAM LANCE
(TO USE WITH SPPV45764)



CODE: SPPV87587
TRIANGULAR BRUSH INSERT
(TO USE WITH SPPV46531)



STEAM-ONLY BASIC ACCESSORIES

CODE: IPIP47898
HANDGRIP + HOSE
STEAM 2,5 m (OPTIONAL
FOR NEW STEAMY)



CODE: IPIP45815
HANDGRIP + HOSE
STEAM 5 m (OPTIONAL FOR
NEW STEAMY PLUS/ SG-50)



CODE: IPIP40003
HANDGRIP + HOSE
STEAM 8 m
(OPTIONAL FOR SG-50)



CODE: KTRI40275
STEAM ONLY ACCESSORIES KIT
(OPTIONAL FOR NEW STEAMY/
NEW STEAMY PLUS/SG-50)



SINGLE COMPONENTS INCLUDED IN KIT KTRI40275

CODE: SPPV89000
RECTANGULAR MULTI-USE
BRUSH



CODE: MPVR45785
EXTENSION HOSES 2PCS



CODE: SPPV45789
WINDOW CLEANER
STEAM BRUSH



CODE: SPPV45793
120° CURVED STEAM
LANCE




CODE: SPPV89931
Ø30 mm NYLON BRISTLES
BRUSH (3PCS)



CODE: SPPV87589
Ø50 mm NYLON BRISTLES
BRUSH (3PCS)



CODE: KTRI89902
O-RINGS FOR HOSE
EXTENSION



STEAM-ONLY SPECIAL APPLICATIONS ACCESSORIES

CODE: KTRI89215
STEAM MOP



CODE: SPPV40039
MICROFIBER SLEEVE
FOR DELICATE SURFACES
(10PCS)



CODE: SPPV40034
Ø50 mm STAINLESS STEEL
BRUSH (1 PCS)



CODE: SPPV40035
Ø50 mm BRASS BRUSH
(1 PCS)



CODE: SPPV45791
STEAM WINDOW
CLEANER 25/35 cm



CODE: SPPV87587
TRIANGULAR BRUSH



CODE: KTRI45328
PROFESSIONAL FLATIRON
KIT (OPTIONAL FOR SG-50)



OTHER ACCESSORIES

CODE: MPVR88900
TANK 5 L
(STANDARD FOR SG-50)



CODE: KTRI40269
DESCALING KIT
(10 PHIALS)



CODE: KTRI89495
TROLLEY FOR NEW
STEAMY AND NEW
STEAMY PLUS



CODE: KTRI89496
TROLLEY FOR NEW
STEAMY AND NEW
STEAMY PLUS



CODE: KTRI40271
TROLLEY
(FOR SG-50)





PURE WATER CLEANING SYSTEMS

SUGGESTED SECTORS	150
EXCLUSIVE TECHNOLOGIES	152
HPB HIGH PURE	154
HPE HIGH PURE	155
HPG HIGH PURE	156
ACCESSORIES	157

BUILDING



RENOVATION

- ▶ WINDOW CLEANING

BUILDINGS

- ▶ WINDOW CLEANING
- ▶ SHOP WINDOW CLEANING

CONCRETE INDUSTRY

GREEN ENERGIES



PHOTOVOLTAIC PANELS

- ▶ SOLAR PANEL WASHING AND RINSING

WIND TURBINES

- ▶ STRUCTURE WASHING AND RINSING

NAUTICAL - AUTOMOTIVE - TRANSPORT



CAR WASHING

- ▶ EXTERNAL RINSING

BOATS AND SHIPS

- ▶ WINDOW CLEANING
- ▶ EXTERNAL SURFACE WASHING AND RINSING

BUSES & TRAINS

- ▶ WINDOW CLEANING
- ▶ EXTERNAL SURFACE WASHING AND RINSING

GREENHOUSES - GLASSHOUSES - TENSILE STRUCTURES



GREENHOUSES

- ▶ EXTERNAL AND INTERNAL ROOF/
WALL WASHING AND RINSING
- ▶ WINDOW CLEANING

GLASSHOUSES

- ▶ EXTERNAL AND INTERNAL ROOF/
WALL WASHING AND RINSING
- ▶ WINDOW CLEANING

TENSILE STRUCTURES

- ▶ TENSILE STRUCTURE WASHING
AND RINSING

POWER FILTER

The 4-stage filtration system ensures complete water purification.

POWER PUMP

High-quality rotary blade pumps with a brass structure prevent possible contamination of treated water.

ERGONOMICS

Extreme ease of movement is provided through a structure with handles and puncture-proof solid wheels.

MANOMETER

Efficiency is always under control through a flow meter that regulates the amount of water that passes through the filters. The manometer also controls membrane pressure.

DURABILITY

All components are designed to ensure long durability and reliability. The brass connectors avoid any possible contamination of treated water.

EXCLUSIVE TECHNOLOGIES

HPB
HPE
HPG

•

•

•

•

•

HPB HIGH PURE



PRESSURE

~5 bar

FLOW RATE

~5 l/min

BATTERY NOT INCLUDED

EXCLUSIVE CHARACTERISTICS

- ▶ **POWER FILTER**
- ▶ **ERGONOMICS**
- ▶ **DURABILITY**
- ▶ **POWER PUMP**
- ▶ **MANOMETER**

TECHNICAL DATA

Code

HPB

APTA40016

PERFORMANCE

Operating pressure	bar	~5
Pure water flow	l/min	~5
Water in/out connections	gas	3/4"
Maximum working height	m	16 (also with 2 poles)
Productivity	m ² /h	up to 200
Power supply		Gel battery optional
Dimension (LxWxH)	cm	53x50x127
Weight	kg	53,6

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
**REVERSE OSMOSIS
MEMBRANE**



CODE: PRCH40034
**POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE**



CODE: KTRI40106
**FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge**



CODE: TBFX40010
DRAINAGE TUBE



CODE: TBFX40009
**30 m FLEXIBLE HOSE
WITH FITTINGS**



CODE: VVSF40018
**FLOW REGULATION
VALVE**



CODE: AZMC40006
**HAND-HELD TDS
METER**



CODE: CNPR40007
GASKET LUBRICANT



HPE HIGH PURE (ELECTRIC)

PRESSURE

~10 bar

FLOW RATE

~ 7 l/min



THIS MODEL CAN BE COMBINED WITH: IDAF40884 - PW-C40 D1005P4 M

EXCLUSIVE CHARACTERISTICS

- ▶ POWER FILTER
- ▶ ERGONOMICS
- ▶ DURABILITY
- ▶ POWER PUMP
- ▶ MANOMETER

TECHNICAL DATA

Code

HPE

APTA40015

PERFORMANCE

Operating pressure	bar	8~10
Pure water flow	l/min	~7
Water in/out connections	gas	3/4"
Maximum working height	m	16 (also with 2 poles)
Productivity	m ² /h	up to 200
Power supply	Ph-V-Hz	1-230-50
Absorbed power	kW	0,6
Dimension (LxWxH)	cm	53x50x127
Weight	kg	53

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/
TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
REVERSE OSMOSIS
MEMBRANE



CODE: PRCH40034
POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: KTRI40106
FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge



CODE: VVSF40018
FLOW REGULATION
VALVE



CODE: TBFX40009
30 m FLEXIBLE HOSE
WITH FITTINGS



CODE: CNPR40007
GASKET LUBRICANT



CODE: AZMC40006
HAND-HELD TDS
METER



CODE: TBFX40010
DRAINAGE TUBE



HPG HIGH PURE

PRESSURE

~9 bar

FLOW RATE

~6,5 l/min



PETROL ENGINE

EXCLUSIVE CHARACTERISTICS

- ▶ POWER FILTER
- ▶ ERGONOMICS
- ▶ DURABILITY
- ▶ POWER PUMP
- ▶ MANOMETER

TECHNICAL DATA

Code

HPG

APTA40012

PERFORMANCE

Operating pressure	bar	~9
Pure water flow	l/min	~6,5
Water in/out connections	gas	3/4"
Maximum working height	m	16 (also with 2 poles)
Productivity	m ² /h	up to 200
Engine type		Honda GX120 (gasoline)
Engine power	Hp	4
Dimension (LxWxH)	cm	53x67x127
Weight	kg	56,6

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
REVERSE OSMOSIS
MEMBRANE



CODE: PRCH40034
POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: KTRI40106
FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge



CODE: VVSF40018
FLOW REGULATION
VALVE



CODE: TBFX40009
30 m FLEXIBLE HOSE
WITH FITTINGS



CODE: CNPR40007
GASKET LUBRICANT



CODE: AZMC40006
HAND-HELD TDS
METER



CODE: TBFX40010
DRAINAGE TUBE



MODULAR POLES

CODE: KTRI40280
10 m CARBON FIBER
MODULAR POLES KIT (8 Kg)




CODE: KTRI40281
16 m CARBON FIBER
MODULAR POLES KIT (10 Kg)



KTRI40280 - SINGLE COMPONENTS INCLUDED IN KIT

CODE: LCPR40022
1,5 m CARBON FIBER
SECTION (700g) - (6 PCS)



CODE: LCPR40083
0,75 m CARBON FIBER
SECTION (484g) - (1 PCS)



CODE: KTRI40508
BAG FOR TRANSPORT
MODULAR POLES



CODE: TBFX40003
20 m FLEXIBLE HOSE WITH
FITTINGS



CODE: RCVR40107
5 cm DIRECT MOUNT
BRUSH ADAPTER




CODE: RCVR40053
FITTING WITH GASKET



KTRI40281 - SINGLE COMPONENTS INCLUDED IN KIT

CODE: LCPR40022
1,5 m CARBON FIBER
SECTION (700g) - (10 PCS)



CODE: LCPR40083
0,75 m CARBON FIBER
SECTION (484g) - (1 PCS)



CODE: KTRI40508
BAG FOR TRANSPORT
MODULAR POLES



CODE: TBFX40003
20 m FLEXIBLE HOSE WITH
FITTINGS



CODE: RCVR40107
5 cm DIRECT MOUNT
BRUSH ADAPTER



CODE: RCVR40053
FITTING WITH GASKET



TELESCOPIC POLES

CODE: LCPR40097
5,2 m GLASS FIBER
TELESCOPIC POLE KIT



CODE: LCPR40098
8,8 m FUSION TELESCOPIC
POLE KIT



CODE: LCPR40099
15,2 m CARBON FIBER
TELESCOPIC POLE KIT



LCPR40097 - LCPR40098 - LCPR40099 - SINGLE COMPONENTS INCLUDED IN KIT

CODE: TBBP40040
FLEXIBLE HOSE FOR
TELESCOPIC POLES AND
SPEED BRUSH (SOLD BY
METER)



CODE: RCVR40107
5 cm DIRECT MOUNT
BRUSH ADAPTER



CODE: RCVR40053
FITTING WITH GASKET



PLASTIC GOOSENECKS

CODE: RCVR40048
5 cm ADJUSTABLE
GOOSENECK



CODE: RCVR40070
25 cm ADJUSTABLE
GOOSENECK



ALUMINIUM GOOSENECKS

CODE: RCVR40241
10 cm ADJUSTABLE
GOOSENECK (188 g)



CODE: RCVR40240
20 cm ADJUSTABLE
GOOSENECK (215 g)



CODE: RCVR40239
40 cm ADJUSTABLE
GOOSENECK (286 g)



ALUMINIUM GOOSENECKS FOR DOUBLE BRUSH

CODE: KTRI40629
10 cm ADJUSTABLE
GOOSENECK FOR DOUBLE
BRUSH (342 g)



CODE: KTRI40630
20 cm ADJUSTABLE
GOOSENECK FOR DOUBLE
BRUSH (364g)



CODE: KTRI40631
40 cm ADJUSTABLE
GOOSENECK FOR DOUBLE
BRUSH(464g)




SOFT SPEED BRUSH (FOR ORDINARY CLEANING)

CODE: SPID40020
35 cm NYLON BRUSH
WITH 0° NOZZLES 5 cm
PLASTIC GOOSENECK
INCLUDED




CODE: SPID40022
35 cm NYLON BRUSH WITH
DOUBLE NOZZLES 0°/25°
NOZZLES 5 CM PLASTIC
GOOSENECK INCLUDED



CODE: SPID40021
35 cm NATURAL BRUSH
WITH 0°/25° NOZZLES
5 cm PLASTIC GOOSENECK
INCLUDED



CODE: SPID40023
45 cm NYLON BRUSH WITH
0°/25° NOZZLES
5 cm PLASTIC GOOSENECK
INCLUDED



BACK SCRUB (REAR WASHING FLEECE SUPPORT)

CODE: SPPV40029
25 cm WASHING
FLEECE SUPPORT
TECHNOLITE (TO BE
USED WITH ALUMINIUM
GOOSENECKS)



CODE: SPPV40030
25 cm MICROTIGER
REPLACEMENT SLEEVE



CODE: SPPV40031
25 cm FT12 REPLACEMENT
SLEEVE WITH ABRASIVE
STRIP



BATTERIES AND BATTERY CHARGERS

CODE: BAAC00134
12V 45A BATTERY
(RUNNING TIME UP TO 2
HOURS)



CODE: BACA00176
12V 5A CBHD1 "STAND
ALONE" BATTERY CHARGER
(FOR BAAC00134)



CODE: BAAC00189
12V 74A/C5 BATTERY
(RUNNING TIME UP TO 4
HOURS)



CODE: BACA00177
12V 10A CBHD2 "STAND
ALONE" BATTERY CHARGER
(FOR BAAC00117)



OTHER ACCESSORIES

CODE: KTRI40112
Y VALVE FOR 2 POLES
INSTALLATION



CODE: RCVR40111
PLASTIC T VALVE (STD
WITH SPEED BRUSH, OPT.
WITH DOUBLE BRUSH)



CODE: PRCH40034
1 Kg POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: TBBP40040
FLEXIBLE HOSE FOR
TELESCOPIC POLES AND
SPEED BRUSH (SOLD BY
METER)



ELECTRIC VEHICLES

TIGER 250/TIGER 250 BC	160
TIGER 500	160



ELECTRIC VEHICLE

TIGER 250/TIGER 250 BC

MOTOR

2/300
n°/W

BATTERY

2/12
n°/V

AUTONOMY

~3
h



ELECTRIC VEHICLE

TIGER 500

MOTOR

2/600
n°/W

BATTERY

2/12
n°/V

AUTONOMY

~4
h

TECHNICAL DATA

		TIGER 250G II *	TIGER 250 BC II **	TIGER 500S II *
Code		ELVC42020	ELVC40000	ELVC42022
PERFORMANCE				
Motor	N°/W	2/300	2/300	2/600
Battery	N°/V	2x12V	2x12V	2x12V
Recharging voltage	V	24	100/240v	24
Autonomy	h	~3	~3	~4
Battery rec. time	h	~8	~8	~8
Max capacity on flat surface	kg	140	140	170
Max capacity on flat surface + haulage	kg	150	150	270
Max negotiable gradient with driven only	% max	~5%	~5%	~12%
Speed forward gear	km/h	0-12	0-12	0-12
Speed reverse gear	km/h	0-12	0-12	0-12
Dimension (LxWxH)	cm	120x65x115	120x65x115	140x80x122
Weight	kg	110	110	150
Min swerve radius	MM	550	550	550

* Battery and battery charger not included.

** Battery charger is included (battery non included).

OPTIONAL ACCESSORY TIGER 250

CODE: BAAC29876
BATTERY 12V-38A
(197X165X170 mm - 14 Kg)
(2PCS)

PICTURE
NOT
AVAILABLE

CODE: BACA43835
ELECTRONIC BATTERY CHARGER
(260X205X145 mm - 7,5 Kg)

PICTURE
NOT
AVAILABLE

CODE: KTRI30043
BASIC FLAT TRAILER FOR
TRANSPORTING MATERIAL
(80X60 cm - 22 Kg)
(MAX CAPACITY: 60 Kg)



CODE: KTRI30044
BASKET TO BE USED WITH THE
FLAT TRAILER WITH KTRI30043
(78X59X80 cm - 11 Kg)
(MAX CAPACITY: 55 Kg)



CODE: KTRI30040
FRONT CARRIER BASKET
(DIM:40X30X18 cm - 1,5 Kg)



CODE: KTRI30041
KIT OF N°2 REAR SIDE CARRIER
BASKET (40X30X18 cm - 1,5 Kg)



CODE: KTRI30042
LARGE-VOLUME REAR BASKET
"MARKET" (60X50X54 cm -
9,5 Kg) (MAX CAPACITY: 65 Kg)



CODE: KTRI45151
BASIC FLAT TRAILER FOR
TRANSPORTING MATERIALS
(135X70X25 cm - 40 Kg)
(MAX CAPACITY: 100 Kg)



CODE: KTRI43036
MOP MODULE (WEIGHT: 13 Kg)



CODE: KTRI41464
ROTATING HEADLIGHT KIT
(46X26X173 - 4 Kg)



CODE: KTRI01755
TOOLS EQUIPMENT CLEANING
TROLLEY



CODE: KTRI40041
FRONT AND REAR TROLLEY
CONNECTIONS (TO BE
USED WITH TROLLEY COD:
KTRI01755)

PICTURE
NOT
AVAILABLE

OPTIONAL ACCESSORY TIGER 500

CODE: BAAC39925
BATTERY 12V-75A (265X175X210
mm - 20 Kg) (2PCS)

PICTURE
NOT
AVAILABLE

CODE: BACA00133
ELECTRONIC BATTERY
CHARGER

PICTURE
NOT
AVAILABLE

CODE: KTRI43848
ROTATING HEADLIGHT KIT
(46X16X140 cm - 5 Kg)



CODE: KTRI43160
MOP MODULE (13 Kg)



CODE: KTRI31323
ROTATING HEADLIGHT KIT
(71X68X106 cm - 30 Kg)



CODE: KTRI30052
KIT OF N°2 REAR SIDE CARRIER
BASKET (36X21X21 cm - 1,5 Kg)



CODE: KTRI30053
LARGE-VOLUME REAR BASKET
"MARKET" (70X95X45 cm -
9,5 Kg) (MAX CAPACITY: 90 Kg)



CODE: KTRI40041
TROLLEY FRONT AND REAR
CONNECTIONS (TO BE USED
WITH TROLLEY KTRI01755/
KTRI01756)

PICTURE
NOT
AVAILABLE

CODE: KTRI30055
BASKET TO BE USED WITH
THE FLAT TRAILER WITH
KTRI30054 (88X74X80 cm -
12 Kg) (MAX CAPACITY: 70 Kg)



CODE: KTRI30054
BASIC FLAT TRAILER FOR
TRANSPORTING MATERIAL
(95X75cm - 27 Kg)
(MAX CAPACITY: 120Kg)



CODE: KTRI45231
BASIC FLAT TRAILER FOR
TRANSPORTING MATERIALS
(136X80X55 cm - 70Kg)
(MAX CAPACITY: 200 Kg)



CODE: KTRI01755
TROLLEY CLEANING TOOLS
EQUIPMENT



CODE: KTRI40041
FRONT AND REAR TROLLEY
CONNECTIONS (TO BE
USED WITH TROLLEY COD:
KTRI01755)

PICTURE
NOT
AVAILABLE

CODE: KTRI30051
FRONT CARRIER BASKET
(40X30X18 cm - 1,5 Kg)



OPTIONAL ACCESSORY TIGER 1000 (UNTIL STOCK AVAILABILITY)

CODE: BAAC21196
BATTERY 6V-240A
(244X190X275 mm - 30 Kg)
(4PCS)

PICTURE
NOT
AVAILABLE

CODE: BACA21194
ELECTRONIC BATTERY
CHARGER 24V - 25A

PICTURE
NOT
AVAILABLE

CODE: KTRI30054
BASIC FLAT TRAILER FOR
TRANSPORTING MATERIAL
(95X75 cm - 27 Kg)
(MAX CAPACITY: 120 Kg)



CODE: KTRI30055
BASKET TO BE USED WITH
THE FLAT TRAILER WITH
KTRI30054 (88X74X80 cm -
12 Kg)
(MAX CAPACITY: 70 Kg)



CODE: KTRI30051
FRONT CARRIER BASKET
(40X30X18 cm - 1,5 Kg)



CODE: KTRI01755
TROLLEY CLEANING TOOLS
EQUIPMENT



CODE: KTRI40041
FRONT AND REAR TROLLEY
CONNECTIONS (TO BE
USED WITH TROLLEY COD:
KTRI01755)

PICTURE
NOT
AVAILABLE



PACKAGING

HIGH PRESSURE WASHERS - COLD WATER	168
HIGH PRESSURE WASHERS - HOT WATER	170
HIGH PRESSURE WASHERS - HOT WATER	171
HIGH PRESSURE WASHERS - STATIONARY	172
ELECTRICALLY HEATED BOILER	172
HOT WATER WEED REMOVAL SYSTEM	172
STEAMERS	173
HIGH PURE	173
TIGER	173

HIGH PRESSURE WASHERS - COLD WATER

Code	Model	carton	Pallet + carton	dimension			volume	Weight
				L mm	W mm	H mm	m³	kg
IDAF94424	G132 I 1207 A	•		360	350	790	0,1	20,00
IDAF94426	G132 I 1307 A	•		360	350	790	0,1	20,00
IDAF94428	G133 I 1508 A	•		440	415	850	0,15	25,00
IDAF94462	G133 I 1508 AO	•		440	415	850	0,15	25,00
IDAF94430	G133 I 1609 AO	•		440	415	850	0,15	26,00
IDAF94362	SUPERJET I1508P M	•		500	300	420	0,06	21,00
IDAF94363	SUPERJET I1609P M	•		500	300	420	0,06	22,60
IDAF94364	SUPERJET I1310P M	•		500	300	420	0,06	22,60
IDAF94194	G.POWER-C I1509P M	•		480	370	950	0,17	33,60
IDAF94198	G.POWER-C I813P T	•		480	370	950	0,17	39,20
IDAF94195	G.POWER-CP I1509P M	•		480	370	950	0,17	36,20
IDAF94199	G.POWER-CP I1813P T	•		480	370	950	0,17	41,60
IDAF40418	N.ELITE-C 1813P T	•		580	870	580	0,30	47,60
IDAF40436	N.ELITE-C D1915P4 T	•		580	870	580	0,30	53,80
IDAF40961	ATOMAX-C D1112P4 M	•		690	500	660	0,32	52,00
IDAF40962	ATOMAX-C D1310P4 M	•		690	500	660	0,32	52,00
IDAF40963	ATOMAX-C D1708P4 M	•		690	500	660	0,32	52,00
IDAF40964	ATOMAX-C D1813P T	•		690	500	660	0,32	50,00
IDAF40965	ATOMAX-C D1814PT	•		690	500	660	0,32	52,00
IDAF40966	ATOMAX-C D1915P4 T	•		690	500	660	0,32	57,00
IDAF40969	ATOMAX-C DP1708P4 M	•		690	500	660	0,32	52,00
IDAF40971	ATOMAX-C DP1814P T	•		690	500	660	0,32	52,00
IDAF40972	ATOMAX-C DP1915P4 T	•		690	500	660	0,32	57,00
IDAF41110	ATOMAX-C D1310P4m M	•		700	500	660	0,23	58,00
IDAF41111	ATOMAX-C D1915P4m T	•		700	500	660	0,23	65,00
IDAF40346	ROYAL-C D2117P T	•		920	570	800	0,42	70,20
IDAF40977	PRESS-C D2117P	•		800	550	660	0,27	65,50
IDAF40978	PRESS-C D1721P T	•		800	550	660	0,27	67,30
IDAF40979	PRESS-C D2021P T	•		800	550	660	0,27	73,20
IDAF40980	PRESS-C D2515P T	•		800	550	660	0,27	73,20
IDAF40981	PRESS-C DP2117P T	•		800	550	660	0,27	65,50
IDAF40982	PRESS-C DP1721P T	•		800	550	660	0,27	67,30
IDAF40983	PRESS-C DP2021P T	•		800	550	660	0,27	73,20
IDAF40984	PRESS-C DP2515P T	•		800	550	660	0,27	73,20
IDAF41112	PRESS-C D2117P4M T	•		820	550	660	0,27	80,00
IDAF41113	PRESS-C D1721P4M T	•		820	550	660	0,27	72,00
IDAF41114	PRESS-C D2021P4M T	•		820	550	660	0,27	119,00
IDAF40832	PW-C85 D2030P4 T		•	1160	760	1100	0,97	120,60
IDAF40827	PW-C85 D3515P4 T		•	1160	760	1100	0,97	121,00
IDAF40349	ABSOLUTE-C S2041P T		•	1260	800	1170	1,18	211,00
IDAF40350	ABSOLUTE-C S3521P T		•	1260	800	1170	1,18	204,80
IDAF40351	ABSOLUTE-C S5015P T		•	1260	800	1170	1,18	211,00
IDAF40932	ABSOLUTE-C S5022P T		•	1260	800	1170	1,18	186,00

HIGH PRESSURE WASHERS - COLD WATER

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
IDAF41150	BENZ-C H1809 A		•	700	750	870	0,46	73,00
IDAF41151	BENZ-C H1811PI P		•	700	750	870	0,46	82,80
IDAF41152	BENZ-C H2515PI P		•	700	750	870	0,46	79,80
IDAF41157	BENZ-C DL2515PI P		•	700	750	870	0,46	86,80
IDAF41153	BENZ-C L2216PI P		•	700	750	870	0,46	89,80
IDAF41158	BENZ-C L2021PI P		•	700	750	870	0,46	87,30
IDAF41154	BENZ-C L DL2217PI P		•	700	750	870	0,46	87,40
IDAF41159	BENZ-C L DL2021PI P		•	700	750	870	0,46	87,40
IDAF40794	DIESEL-C L2017P D		•	1160	760	1100	0,75	134,20
CDVE49715	30M FIRE BOX		•	850	790	1090	0,73	129,00
CDVE49716	40M FIRE BOX		•	850	790	1090	0,73	129,00
CDVE40027	40/350 FIRE BOX		•	850	790	1090	0,73	129,00

HIGH PRESSURE WASHERS - HOT WATER

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
IDAC40485	HOT LINE-H I1408AA M	•		650	500	690	0,22	56,50
IDAC40486	HOT LINE-H I1408AO M		•	770	560	930	0,40	58,40
IDAC41612	MITHO-PH I1408AE M			850	730	1030	0,65	83,60
IDAC41613	MITHO-PH I1408P M VALUE			850	730	1030	0,64	82,20
IDAC41614	MITHO-PH I1611P T VALUE			850	730	1030	0,64	94,00
IDAC41615	MITHO-PH PD1509P M			850	730	1030	0,64	94,94
IDAC41616	MITHO-PH I1611P T				730	1030	0,64	94,00
IDAC41419	KOSMIC-H D1309P M	•		910	730	1010	0,67	93,40
IDAC41420	KOSMIC-H D1310P4 M	•		910	730	1010	0,67	93,40
IDAC41421	KOSMIC-H D1509P4 M		•	910	730	1010	0,67	93,40
IDAC41422	KOSMIC-H D1708P4 M		•	910	730	1010	0,67	93,40
IDAC41423	KOSMIC-H D1713P T		•	910	730	1010	0,67	104,20
IDAC41424	KOSMIC-H4 D1309P M		•	910	730	1010	0,67	98,00
IDAC41425	KOSMIC-H4 D1310P4 M		•	910	730	1010	0,67	98,00
IDAC41426	KOSMIC-H4 D1509P4 M		•	910	730	1010	0,67	98,00
IDAC41427	KOSMIC-H4 D1708P4 M		•	910	730	1010	0,67	98,00
IDAC41428	KOSMIC-H4 D1713P T		•	910	730	1010	0,67	100,00
IDAC41124	PW-H28/4 D1310P4 M STAINLESS STEEL		•	1130	810	1140	0,94	98,00
IDAC41125	PW-H28/4 D1713P T STAINLESS STEEL		•	1130	810	1140	0,94	100,00
IDAC41430	GOLDEN-H D1813P4 T		•	1130	750	1110	1,06	143,50
IDAC41431	GOLDEN-H D1915P4 T		•	1130	750	1110	1,06	145,40
IDAC41429	GOLDEN-H D1517P4 T		•	1130	750	1110	1,06	147,40
IDAC41433	GOLDEN-H D1719P4 T		•	1130	750	1110	1,06	157,60
IDAC41432	GOLDEN-H D2017P4 T		•	1130	750	1110	1,06	157,60
IDAC41435	GOLDEN-H4 D1813P4 T		•	1130	750	1110	1,06	143,50
IDAC41436	GOLDEN-H4 D1915P4 T		•	1130	750	1110	1,06	145,40
IDAC41434	GOLDEN-H4 D1517P4 T		•	1130	750	1110	1,06	147,40
IDAC41438	GOLDEN-H4 D1719P4 T		•	1130	750	1110	1,06	157,60
IDAC41437	GOLDEN-H4 D2017P4 T		•	1130	750	1110	1,06	157,60
IDAC41440	GOLDEN-H PD1813P T		•	1130	750	1110	1,06	143,50
IDAC41441	GOLDEN-H PD1915P T		•	1130	750	1110	1,06	145,40
IDAC41439	GOLDEN-H PD1517P T		•	1130	750	1110	1,06	147,40
IDAC41443	GOLDEN-H PD1719P T		•	1130	750	1110	1,06	157,60
IDAC41442	GOLDEN-H PD2017P T		•	1130	750	1110	1,06	157,60
IDAC41445	GOLDEN-H4 PD1813P T		•	1130	750	1110	1,06	143,50
IDAC41446	GOLDEN-H4 PD1915P T		•	1130	750	1110	1,06	145,40
IDAC41444	GOLDEN-H4 PD1517P T		•	1130	750	1110	1,06	147,40
IDAC41448	GOLDEN-H4 PD1719P T		•	1130	750	1110	1,06	157,60
IDAC41447	GOLDEN-H4 PD2017P T		•	1130	750	1110	1,06	157,60
IDAC40444	HPS-H D1521P T		•	1430	850	1070	1,30	195,20
IDAC40445	HPS-H D1921P T		•	1430	850	1070	1,30	202,00
IDAC41450	MISTRAL-H D2021P T		•	1120	740	1100	0,91	174,20
IDAC41451	MISTRAL-H D2515P T		•	1120	740	1100	0,91	178,00
IDAC41453	MISTRAL-H4 D2021P T		•	1120	740	1100	0,91	186,00
IDAC41454	MISTRAL-H4 D2515P T		•	1120	740	1100	0,91	187,60

HIGH PRESSURE WASHERS - HOT WATER

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
IDAC41460	MISTRAL-H PD2021P T		•	1120	740	1100	0,91	181,00
IDAC41461	MISTRAL-H PD2515P T		•	1120	740	1100	0,91	184,40
IDAC41464	MISTRAL-H4 PD2021 T		•	1120	740	1100	0,91	176,40
IDAC41465	MISTRAL-H4 PD2515 T			1120	740	1100	0,91	178,00
IDAC41127	PW-H100 P D2017P T STAINLESS STEEL		•	1200	850	1100	1,12	190,00
IDAC41128	PW-H100 P D1721P T STAINLESS STEEL		•	1200	850	1100	1,12	180,00
IDAC41129	PW-H100 P D2021P T STAINLESS STEEL		•	1200	850	1100	1,12	208,00
IDAC41130	PW-H100 P D2515P T STAINLESS STEEL		•	1200	850	1100	1,12	208,00
IDAC41466	MISTRAL-HT D2015P T			1200	850	1100	1,12	160,00
IDAC41467	MISTRAL-HT4 D2015 T			1200	850	1100	1,12	160,00
IDAC41468	MISTRAL-H A D2021 T			1120	740	1100	0,91	183,80
IDAC41469	MISTRAL-H4 A D2021P T			1120	740	1100	0,91	183,80
IDAC49710	SKID FUEGO-H L1818PI P		•	1200	940	1350	1,52	266,00
PPEL40079	MLC-C D1310P4 M	•		550	620	430	0,15	40,50
PPEL40081	MLC-C D1813P T	•		550	620	430	0,15	42,50

HIGH PRESSURE WASHERS - STATIONARY

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
PPEL40083	MLC-C D1915P T	•		550	620	430	0,15	47,50
PPEL40085	MLC-C D2117P T	•		550	620	430	0,15	52,50
IDAF40486	ML CMP D1310P M		•	740	410	730	0,22	55,60
IDAF40535	ML CMP D1813P T		•	740	410	730	0,22	56,50
IDAF40536	ML CMP D1915P T		•	740	410	730	0,22	63,00
IDAF40537	ML CMP D2117P T		•	740	410	730	0,22	73,50
IDAF40366	ML-C D1515PI T		•	900	520	720	0,34	93,00
IDAF40367	ML-C D1521PI T		•	900	520	720	0,34	98,00
IDAF40368	ML-C D1618PI T		•	900	520	720	0,34	98,50
IDAF40369	ML-C D2015PI T		•	900	520	720	0,34	98,20
IDAF40370	SML-C D1030P T		•	1110	750	1070	0,89	80,00
IDAF40372	SML-C D2021PI T		•	1110	750	1070	0,89	136,50
IDAC48037	MUR. IWD-H D1615PI T		•	1400	650	1030	0,94	207,80
IDAC48038	MUR. IWD-H D1618PI T		•	1400	650	1030	0,94	209,00
IDAC48039	MUR. IWD-H D2015PI T		•	1400	650	1030	0,94	207,80
IDAC48040	MUR. IWD-H D1521PI T		•	1400	650	1030	0,94	207,80
IDAC48041	MUR. IWD-H D2021PI T		•	1400	650	1030	0,94	230,00
IDAC41470	MISTRAL-E D1404P12 T		•	1200	850	1100	1,12	130,00
IDAC41471	MISTRAL-E D1404P24 T		•	1200	850	1100	1,12	130,00

ELECTRICALLY HEATED BOILER

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
IDAC41472	MISTRAL-E D1710P12 T		•	1200	850	1100	1,12	130,40
IDAC41473	MISTRAL-E D1712P24 T		•	1200	850	1100	1,12	130,40
IDAC41474	MISTRAL-E D1712P236 T		•	1200	850	1100	1,12	130,40
IDAC41131	PW-E100 D1710P12 T		•	1200	850	1100	1,12	151,40
IDAC41132	PW-E100 D1712P24 T		•	1200	850	1100	1,12	151,40
IDAC41133	PW-E100 D1712P36 T		•	1200	850	1100	1,12	151,40
IDAC41134	IWD-E D1710P12 T		•	1400	650	1050	0,96	170,00
IDAC41135	IWD-E D1712P24 T		•	1400	650	1050	0,96	171,00
IDAC41136	IWD-E D1712P36 T		•	1400	650	1050	0,96	176,00

HOT WATER WEED REMOVAL SYSTEM

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
GNVA40051	GREEN JT 1010 M		•	1050	890	1160	1,08	161,20
GNVA40078	GREEN JET 7510 M		•	1050	890	1160	1,08	180,00

STEAMERS

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m ³	kg
GNVA40036	SG-8 S 4507 M	•		540	360	430	0,08	9,10
GNVA40037	SG-10 S 5007 M	•		540	360	430	0,08	10,00
GNVA40038	SG-10 S 6008 M	•		540	360	430	0,08	12,00
GNVA47891	NEW STEAMY	•		580	400	650	0,15	18,20
GNVA40008	NEW STEAMY PLUS	•		580	400	650	0,15	18,94
GNVA40043	SG-48 S 8010 M		•	800	600	710	0,34	42
GNVA40068	SG-50 S 5010 M		•	890	540	1020	0,49	58,00
GNVA40069	SG-50 S 5014 T		•	890	540	1020	0,49	62,00
GNVA40047	SG-55 8025 T		•	855	615	1150	0,60	64,50

HIGH PURE

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m ³	kg
APTA40016	HPB		•	1300	590	660	0,51	70,60
APTA40015	HPE		•	1300	590	660	0,51	66,00
APTA40012	HPG		•	1300	590	1220	0,94	67,20

TIGER

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m ³	kg
ELVC42020	TIGER 250G II		•	1250	700	880	0,77	122,80
ELVC40000	TIGER 250 BC		•	1250	700	880	0,77	122,80
ELVC42022	TIGER 500S II		•	1450	830	970	1,17	172,00

PORTOTECNICA™

member of **IPC**[illegible]

[illegible]

PORTOTECNICA™

member of **IPC**[illegible]

IP Cleaning Srl

Viale Treviso 63
30026 Summaga di Portogruaro (VE) - Italy

Tel. +39 0421 205511 - Fax +39 0421 204227
info@ipcworldwide.com - www.ipcworldwide.com



member of



IPC